




# MBA

## Belts - Conidrive N10 - Lengths

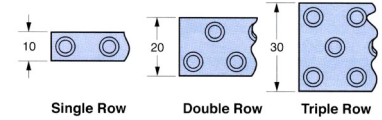

Self Guided Belts - 10mm Pitch - Sold by the metre.

-30 to +80 Degree Celsius.

Self guiding system - no pulley flanges required.

For metering, positioning and oscillating systems.

Polyurethane Reinforced with Steel Tensile Cords.

Orders for more than one metre will be supplied as a continuous length up to the max length shown.

This catalogue to be read in conjunction with information at [http://www.minibearings.com.au/ogue/tech/conidrive/conidrive\\_tech.pdf](http://www.minibearings.com.au/ogue/tech/conidrive/conidrive_tech.pdf)

<http://www.minibearings.com.au/categories/timing+belts/all/pics/>

<http://www.minibearings.com.au/partslist/pulleysconidrive10/pulleys/wide/1/>

### Belts - Conidrive N10 - Lengths

Part Number	Max. Length mtr	Width mm <i>inches</i>	Material
# CDB-1-MTR	50	10.0 <i>0.394</i>	-
# CDB-2-MTR	50	20.0 <i>0.787</i>	-

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Belts - Conidrive N10 - Lengths

Part Number	Max. Length mtr	Width mm	Material
# CDB-3-MTR	50	30.0 <i>1.181 inches</i>	-

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to [catalogues@minibearings.com.au](mailto:catalogues@minibearings.com.au)

