




MBA

Castors - Black Rubber

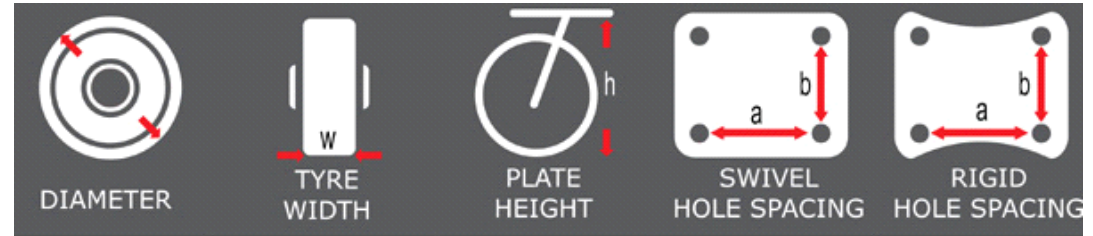

Black rubber castors including fixed, swivel and brake types.
Economical, protects floors, quiet, easy to roll over obstacles

Castors - Black Rubber

Part Number	Wheel diameter mm <i>inches</i>	Type	Tyre material	Max. Load Rating per castor kg	Hole Spacing (a x b) mm <i>inches</i>	Plate Height (h) mm <i>inches</i>	Tyre Width (w) mm <i>inches</i>
DRU032S	32 <i>1.260</i>	Swivel	Rubber Tyred	12.0	28 x 23 <i>inches</i>	42.0 <i>1.654</i>	14.0 <i>0.551</i>
DRU032R	32 <i>1.260</i>	Rigid	Rubber Tyred	12.0	27 (2 holes only) <i>inches</i>	42.0 <i>1.654</i>	14.0 <i>0.551</i>
# DRU038R	38 <i>1.496</i>	Rigid	Rubber Tyred	20.0	13 x 35 <i>inches</i>	50.0 <i>1.969</i>	17.0 <i>0.669</i>
DRU038S	38 <i>1.496</i>	Swivel	Rubber Tyred	20.0	36 x 28 <i>inches</i>	50.0 <i>1.969</i>	17.0 <i>0.669</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Castors - Black Rubber

Part Number	Wheel diameter mm <i>inches</i>	Type	Tyre material	Max. Load Rating per castor kg	Hole Spacing (a x b) mm <i>inches</i>	Plate Height (h) mm <i>inches</i>	Tyre Width (w) mm <i>inches</i>
# DRU050R	50 <i>1.969</i>	Rigid	Rubber Tyred	40.0	53 x 24	82.0 <i>3.228</i>	22.0 <i>0.866</i>
# DRU050S	50 <i>1.969</i>	Swivel	Rubber Tyred	40.0	53 x 24	82.0 <i>3.228</i>	22.0 <i>0.866</i>
# DRU050SB	50 <i>1.969</i>	Swivel with Brake	Rubber Tyred	40.0	53 x 24	82.0 <i>3.228</i>	22.0 <i>0.866</i>
DRU063R	63 <i>2.480</i>	Rigid	Rubber	65	73 x 44	82.0 <i>3.228</i>	28.0 <i>1.102</i>
DRU063S	63 <i>2.480</i>	Swivel	Rubber	65	73 x 44	82.0 <i>3.228</i>	28.0 <i>1.102</i>
DRU063SB	63 <i>2.480</i>	Swivel with Brake	Rubber	65	73 x 44	82.0 <i>3.228</i>	28.0 <i>1.102</i>
# DRU075SB	75 <i>2.953</i>	Swivel with Brake	Rubber Tyred	80.0	82 x 57	95.0 <i>3.740</i>	32.0 <i>1.260</i>
# DRU075R	75 <i>2.953</i>	Rigid	Rubber Tyred	80.0	82 x 35	95.0 <i>3.740</i>	32.0 <i>1.260</i>
# DRU075S	75 <i>2.953</i>	Swivel	Rubber Tyred	80.0	82 x 57	95.0 <i>3.740</i>	32.0 <i>1.260</i>
# DRU100RHD	100 <i>3.937</i>	Rigid	Rubber Tyred	190.0	76 x 60	127.0 <i>5.000</i>	32.0 <i>1.260</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Castors - Black Rubber

Part Number	Wheel diameter mm <i>inches</i>	Type	Tyre material	Max. Load Rating per castor kg	Hole Spacing (a x b) mm <i>inches</i>	Plate Height (h) mm <i>inches</i>	Tyre Width (w) mm <i>inches</i>
# DRU100S	100 <i>3.937</i>	Swivel	Rubber Tyred	100.0	80 x 60	127.0 <i>5.000</i>	28.0 <i>1.102</i>
# DRU100SB	100 <i>3.937</i>	Swivel with Brake	Rubber Tyred	100.0	80 x 60	127.0 <i>5.000</i>	28.0 <i>1.102</i>
# DRU100SBHD	100 <i>3.937</i>	Swivel with Brake	Rubber Tyred	190.0	76 x 60	127.0 <i>5.000</i>	32.0 <i>1.260</i>
# DRU100SHD	100 <i>3.937</i>	Swivel	Rubber Tyred	190.0	76 x 60	127.0 <i>5.000</i>	32.0 <i>1.260</i>
# DRU100R	100 <i>3.937</i>	Rigid	Rubber Tyred	100.0	80 x 60	127.0 <i>5.000</i>	28.0 <i>1.102</i>
# DRU125R	125 <i>4.921</i>	Rigid	Rubber Tyred	100.0	80 x 60	155.0 <i>6.102</i>	37.0 <i>1.457</i>
# DRU125S	125 <i>4.921</i>	Swivel	Rubber Tyred	100.0	80 x 60	155.0 <i>6.102</i>	37.0 <i>1.457</i>
# DRU125SB	125 <i>4.921</i>	Swivel with Brake	Rubber Tyred	100.0	80 x 60	155.0 <i>6.102</i>	37.0 <i>1.457</i>
# DRU150R	150 <i>5.906</i>	Rigid	Rubber Tyred	150.0	106 x 80	184.0 <i>7.244</i>	35.0 <i>1.378</i>
# DRU150S	150 <i>5.906</i>	Swivel	Rubber Tyred	150.0	106 x 80	184.0 <i>7.244</i>	35.0 <i>1.378</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Castors - Black Rubber

Part Number	Wheel diameter mm <i>inches</i>	Type	Tyre material	Max. Load Rating per castor kg	Hole Spacing (a x b) mm <i>inches</i>	Plate Height (h) mm <i>inches</i>	Tyre Width (w) mm <i>inches</i>
# DRU150SB	150 <i>5.906</i>	Swivel with Brake	Rubber Tyred	150.0	106 x 80	184.0 <i>7.244</i>	35.0 <i>1.378</i>
# DRU200SB	200 <i>7.874</i>	Swivel with Brake	Rubber Tyred	225.0	106 x 80	230.0 <i>9.055</i>	50.0 <i>1.969</i>
# DRU200R	200 <i>7.874</i>	Rigid	Rubber Tyred	225.0	106 x 80	230.0 <i>9.055</i>	50.0 <i>1.969</i>
# DRU200S	200 <i>7.874</i>	Swivel	Rubber Tyred	225.0	106 x 80	230.0 <i>9.055</i>	50.0 <i>1.969</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au

