




# MBA

## Clutch Brakes - Magnetic - Bu-Ord Size 11 - Reverse Acting

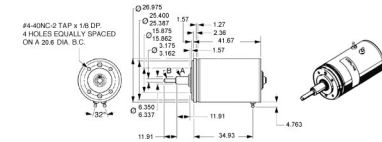

Breakaway Torque (Energised) at 24-28 V DC : 18g.cm (0.25 oz.in).

Breakaway Torque (De-energised) at 24-28 V DC : 7.2g.cm (0.10 oz.in).

Shafts A & B coupled when de-energised, braked when energised.

Inertia (De-Energised) at 24-28 VDC : 7.4g.cm sq (0.041 oz.in sq).

Inertia (Energised) at 24-28 VDC : 5.1g.cm sq (0.028 oz.in sq).

### Clutch Brakes - Magnetic - Bu-Ord Size 11 - Reverse Acting

Part Number	Output Torque g.cm	Shaft Diameter (B / A) mm  <i>inches</i>	Coupling Type	Brake Type	Brake Torque g.cm	Configuration	Outside Diameter mm  <i>inches</i>	Backlash min
# CBMR-03.18x26.98-1152	1152 (16 oz.in)	3.175 / 6.350 Same Side	Friction	Friction	1152 (16 oz.in)	Single Ended	26.975  <i>1.062</i>	5
# CBMR-03.18x26.98-5040	5040 (70 oz.in)	3.175 / 6.350 Same Side	Crown Tooth	Friction	1152 (16 oz.in)	Single Ended	26.975  <i>1.062</i>	10

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to [catalogues@minibearings.com.au](mailto:catalogues@minibearings.com.au)

