




# MBA

## Clutch Brakes - Magnetic - Bu-Ord Size 18 - Reverse Acting

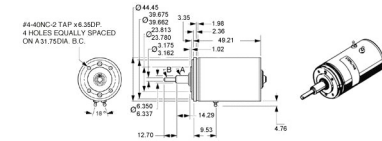

Breakaway Torque (Energised) at 24-28 V DC : 3.6g.cm (0.05 oz.in).

Breakaway Torque (De-Energised) at 24-28 V DC : 14.4g.cm (0.2 oz.in).

Shafts A & B coupled when de-energised, braked when energised.

Inertia (De-Energised) at 24-28 VDC : 7.27g.cm sq (0.101 oz.in sq).

Inertia (Energised) at 24-28 VDC : 5.11g.cm sq (0.071 oz.in sq).

### Clutch Brakes - Magnetic - Bu-Ord Size 18 - Reverse Acting

Part Number	Output Torque g.cm	Shaft Diameter (B / A) mm  <i>inches</i>	Coupling Type	Brake Type	Brake Torque g.cm	Configuration	Outside Diameter mm  <i>inches</i>	Backlash min
# CBMR-03.18x44.45-2160	2160 (30oz.in)	3.175 / 6.350 Same Side	Friction	Friction	2160 (30 oz.in)	Single Ended	44.45  <i>1.750</i>	5
# CBMR-03.18x44.45-4320	4320 (60oz.in)	3.175 / 6.350 Same Side	Crown Tooth	Friction	2160 (30 oz.in)	Single Ended	44.45  <i>1.750</i>	5

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to [catalogues@minibearings.com.au](mailto:catalogues@minibearings.com.au)

