




MBA

Gearboxes - Light Duty - Base Mount

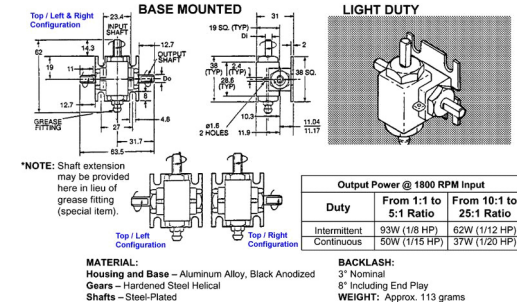

Approx weight 115 grams. Discontinued group. Minimum quantities will apply to manufacture.

Helical Gears.

Brass Bearings.

Backlash: 3 Deg Nominal - Max 8 Deg including endplay.

Aluminium Alloy housing and base.

Plated steel shafts.

Gearboxes - Light Duty - Base Mount

Part Number	Gear Ratio	Shaft Diameter (di) mm <i>inches</i>	Shaft Diameter (do) mm <i>inches</i>	Configuration	Output Torque Rating Watts	Ultimate Static Torque N.m	Manual Torque cap. N.m	Dynamic Torque Cap. N.m
# SRLB-02.0-M-T	2 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left & Right	50	4	3.2	0.5
# SRLB-02.0-M-R	2 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Right	50	4	3.2	0.5
# SRLB-02.0-M-L	2 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left	50	4	3.2	0.5
# SRLB-02.0-IN-L	2 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	50	4	3.2	0.5

Indicates item not stocked at time of printing - Please enquire for lead time
E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Gearboxes - Light Duty - Base Mount

Part Number	Gear Ratio	Shaft Diameter (di) mm <i>inches</i>	Shaft Diameter (do) mm <i>inches</i>	Configuration	Output Torque Rating Watts	Ultimate Static Torque N.m	Manual Torque cap. N.m	Dynamic Torque Cap. N.m
# SRLB-02.0-IN-T	2 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	50	4	3.2	0.5
# SRLB-02.0-IN-R	2 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	50	4	3.2	0.5
# SRLB-02.5-IN-T	2.5 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	50	4	3.2	0.5
# SRLB-02.5-IN-R	2.5 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	50	4	3.2	0.5
# SRLB-02.5-IN-L	2.5 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	50	4	3.2	0.5
# SRLB-03.0-M-R	3 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Right	50	4	3.2	0.5
# SRLB-03.0-M-L	3 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left	50	4	3.2	0.5
# SRLB-03.0-M-T	3 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left & Right	50	4	3.2	0.5
# SRLB-03.0-IN-T	3 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	50	4	3.2	0.5
# SRLB-03.0-IN-L	3 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	50	4	3.2	0.5
# SRLB-03.0-IN-R	3 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	50	4	3.2	0.5

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Gearboxes - Light Duty - Base Mount

Part Number	Gear Ratio	Shaft Diameter (di) mm <i>inches</i>	Shaft Diameter (do) mm <i>inches</i>	Configuration	Output Torque Rating Watts	Ultimate Static Torque N.m	Manual Torque cap. N.m	Dynamic Torque Cap. N.m
# SRLB-04.0-M-R	4 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Right	50	4	3.2	0.5
# SRLB-04.0-M-L	4 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left	50	4	3.2	0.5
# SRLB-04.0-M-T	4 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left & Right	50	4	3.2	0.5
# SRLB-04.0-IN-R	4 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	50	4	3.2	0.5
# SRLB-04.0-IN-L	4 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	50	4	3.2	0.5
# SRLB-04.0-IN-T	4 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	50	4	3.2	0.5
# SRLB-05.0-M-R	5 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Right	50	4	3.2	0.5
# SRLB-05.0-M-L	5 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left	50	4	3.2	0.5
# SRLB-05.0-M-T	5 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left & Right	50	4	3.2	0.5
# SRLB-05.0-IN-T	5 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	50	4	3.2	0.5
# SRLB-05.0-IN-R	5 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	50	4	3.2	0.5
# SRLB-05.0-IN-L	5 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	50	4	3.2	0.5

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Gearboxes - Light Duty - Base Mount

Part Number	Gear Ratio	Shaft Diameter (di) mm <i>inches</i>	Shaft Diameter (do) mm <i>inches</i>	Configuration	Output Torque Rating Watts	Ultimate Static Torque N.m	Manual Torque cap. N.m	Dynamic Torque Cap. N.m
# SRLB-10.0-M-T	10 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left & Right	37	2.8	2.3	0.35
# SRLB-10.0-M-L	10 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left	37	2.8	2.3	0.35
# SRLB-10.0-M-R	10 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Right	37	2.8	2.3	0.35
# SRLB-10.0-IN-L	10 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	37	2.8	2.3	0.35
# SRLB-10.0-IN-T	10 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	37	2.8	2.3	0.35
# SRLB-10.0-IN-R	10 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	37	2.8	2.3	0.35
# SRLB-15.0-M-L	15 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left	37	2.8	2.3	0.35
# SRLB-15.0-M-R	15 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Right	37	2.8	2.3	0.35
# SRLB-15.0-M-T	15 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left & Right	37	2.8	2.3	0.35
# SRLB-15.0-IN-R	15 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	37	2.8	2.3	0.35
# SRLB-15.0-IN-L	15 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	37	2.8	2.3	0.35
# SRLB-15.0-IN-T	15 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	37	2.8	2.3	0.35

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Gearboxes - Light Duty - Base Mount

Part Number	Gear Ratio	Shaft Diameter (di) mm <i>inches</i>	Shaft Diameter (do) mm <i>inches</i>	Configuration	Output Torque Rating Watts	Ultimate Static Torque N.m	Manual Torque cap. N.m	Dynamic Torque Cap. N.m
# SRLB-25.0-M-L	25 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left	37	2.8	2.3	0.35
# SRLB-25.0-M-R	25 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Right	37	2.8	2.3	0.35
# SRLB-25.0-M-T	25 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left & Right	37	2.8	2.3	0.35
# SRLB-25.0-IN-R	25 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	37	2.8	2.3	0.35
# SRLB-25.0-IN-T	25 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	37	2.8	2.3	0.35
# SRLB-25.0-IN-L	25 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	37	2.8	2.3	0.35
# SRLB-01.0-M-L	1 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left	50	4	3.2	0.5
# SRLB-01.0-M-T	1 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Left & Right	50	4	3.2	0.5
# SRLB-01.0-M-R	1 : 1	5.5 (Typ.)	6.0 (Typ.)	Top / Right	50	4	3.2	0.5
# SRLB-01.0-IN-T	1 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left & Right	50	4	3.2	0.5
# SRLB-01.0-IN-L	1 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Left	50	4	3.2	0.5
# SRLB-01.0-IN-R	1 : 1	5.563 <i>0.219</i>	6.350 <i>0.250</i>	Top / Right	50	4	3.2	0.5

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au
