




MBA

Motors - DC 25X21 mm

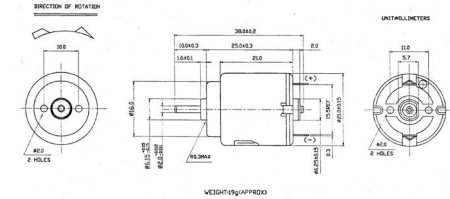

M-14 Series 1.5 to 3 VDC - 4230 to 11280 RPM.

See Datasheets in PDF format. Link at bottom of this page.

Direction of rotation (CW = Clockwise, ACW = Anticlockwise) when looking towards shaft.

This catalogue to be read in conjunction with information at <http://www.minibearings.com.au/ogue/tech/motors/>

Motors - DC 25X21 mm

Part Number	Body Diameter mm	Overall Length mm	Operating Voltage V	Nominal Voltage V	Shaft Size mm	Body Type	Current (No Load/Max Effic) amps	Speed (No Load/Max Efficiency) RPM	Direction	Torque (Max Effic/Stall) g-cm
M-14-2270-1.5V	21.000 <i>0.827</i>	38.000 <i>1.496</i>	1.5 ~ 3.0	1.5	2 x 8.3mm	Round	0.215 / 0.656	8100 / 6170	CW	6.67 / 28.00
M-14-18100-1.5V	21.000 <i>0.827</i>	38.000 <i>1.496</i>	1.5 ~ 3.0	1.5	2 x 8.3mm	Round	0.140 / 0.373	5700 / 4230	CW	4.91 / 19.00

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au

