




# MBA

## Motors - DC 26.9X24.2X18.3 mm

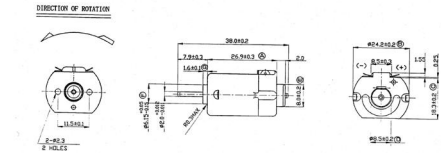

MF-26 Series - 1.5 to 24 VDC - 3600 to 15900 RPM.

See Datasheets in PDF format. Link at bottom of this page.

Direction of rotation (CW = Clockwise, ACW = Anticlockwise) when looking towards shaft.

This catalogue to be read in conjunction with information at <http://www.minibearings.com.au/ogue/tech/motors/>

### Motors - DC 26.9X24.2X18.3 mm

Part Number	Body Diameter x Width mm	Overall Length mm	Operating Voltage V	Nominal Voltage V	Shaft Size mm	Body Type	Current (No Load/Max Effic) amps	Speed (No Load/Max Efficiency) RPM	Direction	Torque (Max Effic/Stall) g-cm
MF-26-2670-1.5V	24.2 x 18.3	38.000	1.5 ~ 3.0	1.5	2 x 6.3mm	Rounded with Flat top and bottom	0.150 / 0.624	6300 / 5080	CW	10.10 / 52.00
		1.496								
MF-26-2295-3.0V	24.2 x 18.3	38.000	1.5 ~ 4.5	3.0	2 x 6.3mm	Rounded with Flat top and bottom	0.130 / 0.597	9300 / 7650	CW	12.90 / 72.00
		1.496								

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Motors - DC 26.9X24.2X18.3 mm

Part Number	Body Diameter x Width mm	Overall Length mm	Operating Voltage V	Nominal Voltage V	Shaft Size mm	Body Type	Current (No Load/Max Effic) amps	Speed (No Load/Max Efficiency) RPM	Direction	Torque (Max Effic/Stall) g-cm
MF-26-20120-3.0V	24.2 x 18.3	38.000	1.5 ~ 4.5	3.0	2 x 6.3mm	Rounded with Flat top and bottom	0.090 / 0.408	7300 / 6000	CW	11.20 / 62.00
		1.496								
MF-26C-2670-4.5V	24.2 x 18.3	38.000	4.5	4.5	2 x 6.45mm	Rounded with Flat top and bottom	0.250 / 1.294	19000 / 15900	CW	19.80 / 122.00
		1.496								
MF-26C-18130-4.5V	24.2 x 18.3	38.000	4.5 ~ 6.0	4.5	2 x 6.45mm	Rounded with Flat top and bottom	0.120 / 0.509	10000 / 8100	CW	14.70 / 77.00
		1.496								
MF-26CS-2670-4.5V	24.2 x 18.3	38.000	4.5	4.5	2 x 6.45mm	Rounded with Flat top and bottom	0.265 / 1.332	14000 / 11670	CW	29.90 / 180.00
		1.496								
MF-26CS-18165-12.0V	24.2 x 18.3	38.000	4.5 ~ 24.0	12.0	2 x 6.45mm	Rounded with Flat top and bottom	0.110 / 0.642	15800 / 13500	CW	32.20 / 220.00
		1.496								
MF-26C-10400-12.0V	24.2 x 18.3	38.000	6.0 ~ 12.0	12.0	2 x 6.45mm	Rounded with Flat top and bottom	0.040 / 0.155	8800 / 7000	CW	14.40 / 70.00
		1.496								
MF-26C-08500-12.0V	24.2 x 18.3	38.000	6.0 ~ 24.0	12.0	2 x 6.45mm	Rounded with Flat top and bottom	0.030 / 0.097	6900 / 5270	CW	10.40 / 44.00
		1.496								

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Motors - DC 26.9X24.2X18.3 mm

Part Number	Body Diameter x Width mm	Overall Length mm	Operating Voltage V	Nominal Voltage V	Shaft Size mm	Body Type	Current (No Load/Max Effic) amps	Speed (No Load/Max Efficiency) RPM	Direction	Torque (Max Effic/Stall) g-cm
MF-26CS-07650-24.0V	24.2 x 18.3	38.000	12.0 ~ 24.0	24.0	2 x 6.45mm	Rounded with Flat top and bottom	0.020 / 0.086	8050 / 6530	CW	17.40 / 92.00
		1.496								

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to [catalogues@minibearings.com.au](mailto:catalogues@minibearings.com.au)

