




# MBA

## Plungers - Spring - Threaded

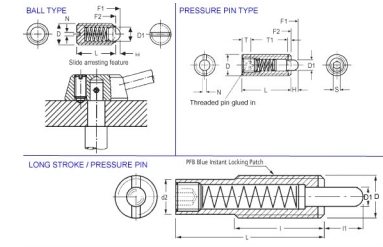

Items shown with Long-Lok have a dry threadlocking sealant applied to thread.

### Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
BSM3	M3	Pressure Pin	Steel	1.0	10.0	1.50	0.70mm Hex Drive	0.5	3.0	-
				<i>0.039</i>	<i>0.394</i>	<i>0.059</i>				
BPM3SS	M3	Ball	Stainless Steel 1.4305 (303S21/3)	1.50	7.00	0.50	0.40mm Slotted Drive	1.50	3.00	-
				<i>0.059</i>	<i>0.276</i>	<i>0.020</i>				
# BPM3SSLOK	M3	Ball	Stainless Steel with Long-Lok	1.50	7.00	0.50	0.40mm Slotted Drive	1.50	3.00	-
				<i>0.059</i>	<i>0.276</i>	<i>0.020</i>				

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
BPM3	M3	Ball	Steel	1.50	7.00	0.50	0.40mm Slotted Drive	1.50	3.00	-
				<i>0.059</i>	<i>0.276</i>	<i>0.020</i>				
# BPM3LOK	M3	Ball	Steel with Long-Lok	1.50	7.00	0.50	0.40mm Slotted Drive	1.50	3.00	-
				<i>0.059</i>	<i>0.276</i>	<i>0.020</i>				
# BSM4P	M4	Pressure Pin	Plastic End - Steel Body	1.50	15.00	1.50	1.30mm Hex Drive	5.00	16.00	-
				<i>0.059</i>	<i>0.591</i>	<i>0.059</i>				
BSM4	M4	Pressure Pin	Steel	1.50	15.00	1.50	1.30mm Hex Drive	5.00	16.00	-
				<i>0.059</i>	<i>0.591</i>	<i>0.059</i>				
BPM4SS	M4	Ball	Stainless Steel 1.4305 (303S21/3)	2.50	9.00	0.80	0.60mm Slotted Drive	4.00	10.00	-
				<i>0.098</i>	<i>0.354</i>	<i>0.031</i>				
# BPM4SSLOK	M4	Ball	Stainless Steel with Long-Lok	2.50	9.00	0.80	0.60mm Slotted Drive	4.00	10.00	-
				<i>0.098</i>	<i>0.354</i>	<i>0.031</i>				
BPM4	M4	Ball	Steel	2.50	9.00	0.80	0.60mm Slotted Drive	4.00	10.00	-
				<i>0.098</i>	<i>0.354</i>	<i>0.031</i>				
# BPM4LOK	M4	Ball	Steel with Long-Lok	2.50	9.00	0.80	0.60mm Slotted Drive	4.00	10.00	-
				<i>0.098</i>	<i>0.354</i>	<i>0.031</i>				

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
# BSM5P	M5	Pressure Pin	Plastic End - Steel Body	2.40	18.00	2.30	1.50mm Hex Drive	6.00	20.00	-
				<i>0.094</i>	<i>0.709</i>	<i>0.091</i>				
# BSM5PLOK	M5	Pressure Pin	Plastic End - Steel Body with Long-Lok	2.40	18.00	2.30	1.50mm Hex Drive	6.00	20.00	-
				<i>0.094</i>	<i>0.709</i>	<i>0.091</i>				
# BSM5SSLOK	M5	Pressure Pin	Stainless Steel 1.4305 with Long-Lok	2.40	18.00	2.30	1.50mm Hex Drive	5.00	17.00	-
				<i>0.094</i>	<i>0.709</i>	<i>0.091</i>				
BSM5SS	M5	Pressure Pin	Stainless Steel 1.4305 (303S21/3)	2.40	18.00	2.30	1.50mm Hex Drive	5.00	17.00	-
				<i>0.094</i>	<i>0.709</i>	<i>0.091</i>				
# BSM5	M5	Pressure Pin	Steel	2.40	18.00	2.30	1.50mm Hex Drive	6.00	20.00	-
				<i>0.094</i>	<i>0.709</i>	<i>0.091</i>				
# BSM5LOK	M5	Pressure Pin	Steel with Long-Lok	2.40	18.00	2.30	1.50mm Hex Drive	6.00	20.00	-
				<i>0.094</i>	<i>0.709</i>	<i>0.091</i>				
# BPM5SSLOK	M5	Ball	Stainless Steel with Long-Lok	3.00	12.00	0.90	0.80mm Slotted Drive	6.00	11.00	-
				<i>0.118</i>	<i>0.472</i>	<i>0.035</i>				

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
BPM5SS	M5	Ball	Stainless Steel 1.4305 (303S21/3)	3.00	12.00	0.90	0.80mm Slotted Drive	6.00	11.00	-
				<i>0.118</i>	<i>0.472</i>	<i>0.035</i>				
BPM5	M5	Ball	Steel	3.00	12.00	0.90	0.80mm Slotted Drive	6.00	11.00	-
				<i>0.118</i>	<i>0.472</i>	<i>0.035</i>				
# BPM5LOK	M5	Ball	Steel with Long-Lok	3.00	12.00	0.90	0.80mm Slotted Drive	6.00	11.00	-
				<i>0.118</i>	<i>0.472</i>	<i>0.035</i>				
# BSM6P	M6	Pressure Pin	Plastic End - Steel Body	2.70	20.00	2.50	2.00mm Hex Drive	7.00	20.00	-
				<i>0.106</i>	<i>0.787</i>	<i>0.098</i>				
# BSM6PLOK	M6	Pressure Pin	Plastic End - Steel Body with Long-Lok	2.70	20.00	2.50	2.00mm Hex Drive	7.00	20.00	-
				<i>0.106</i>	<i>0.787</i>	<i>0.098</i>				
# BSM6SSLOK	M6	Pressure Pin	Stainless Steel 1.4305 with Long-Lok	2.70	20.00	2.50	2.00mm Hex Drive	6.00	17.00	-
				<i>0.106</i>	<i>0.787</i>	<i>0.098</i>				
# BSM6SS	M6	Pressure Pin	Stainless Steel 1.4305 (303S21/3)	2.70	20.00	2.50	2.00mm Hex Drive	6.00	17.00	-
				<i>0.106</i>	<i>0.787</i>	<i>0.098</i>				

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
# BSM6	M6	Pressure Pin	Steel	2.70 <i>0.106</i>	20.00 <i>0.787</i>	2.50 <i>0.098</i>	2.00mm Hex Drive	7.00	20.00	-
# BSM6LOK	M6	Pressure Pin	Steel with Long-Lok	2.70 <i>0.106</i>	20.00 <i>0.787</i>	2.50 <i>0.098</i>	2.00mm Hex Drive	7.00	20.00	-
# BPM6SSLOK	M6	Ball	Stainless Steel with Long-Lok	3.50 <i>0.138</i>	14.00 <i>0.551</i>	1.00 <i>0.039</i>	1.00mm Slotted Drive	9.00	13.00	-
BPM6SS	M6	Ball	Stainless Steel 1.4305 (303S21/3)	3.50 <i>0.138</i>	14.00 <i>0.551</i>	1.00 <i>0.039</i>	1.00mm Slotted Drive	9.00	13.00	-
BPM6	M6	Ball	Steel	3.50 <i>0.138</i>	14.00 <i>0.551</i>	1.00 <i>0.039</i>	1.00mm Slotted Drive	9.00	13.00	-
# BPM6LOK	M6	Ball	Steel with Long-Lok	3.50 <i>0.138</i>	14.00 <i>0.551</i>	1.00 <i>0.039</i>	1.00mm Slotted Drive	9.00	13.00	-
GN.33321	M6	Ball	Acetal Body / Acetal Ball	3.50 <i>0.138</i>	14.00 <i>0.551</i>	1.00 <i>0.039</i>	Slotted - Size Not Specified	12.00	17.00	-
GN.33301	M6	Ball	Acetal Body / Hard Stainless Ball	3.50 <i>0.138</i>	14.00 <i>0.551</i>	1.00 <i>0.039</i>	Slotted - Size Not Specified	12.00	17.00	-

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm <i>inches</i>	Body Length (L) mm <i>inches</i>	Tip Length (H) mm <i>inches</i>	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm <i>inches</i>
BSM8P	M8	Pressure Pin	Plastic End - Steel Body	3.50 <i>0.138</i>	22.00 <i>0.866</i>	3.00 <i>0.118</i>	2.50mm Hex Drive	9.00	35.00	-
# BSM8PLOK	M8	Pressure Pin	Plastic End - Steel Body with Long-Lok	3.50 <i>0.138</i>	22.00 <i>0.866</i>	3.00 <i>0.118</i>	2.50mm Hex Drive	9.00	35.00	-
BSM8SS	M8	Pressure Pin	Stainless Steel 1.4305 (303S21/3)	3.50 <i>0.138</i>	22.00 <i>0.866</i>	3.00 <i>0.118</i>	2.50mm Hex Drive	7.00	29.00	-
# BSM8SSLOK	M8	Pressure Pin	Stainless Steel 1.4305 with Long-Lok	3.50 <i>0.138</i>	22.00 <i>0.866</i>	3.00 <i>0.118</i>	2.50mm Hex Drive	7.00	29.00	-
# BSM8	M8	Pressure Pin	Steel	3.50 <i>0.138</i>	22.00 <i>0.866</i>	3.00 <i>0.118</i>	2.50mm Hex Drive	9.00	35.00	-
# BSM8LOK	M8	Pressure Pin	Steel with Long-Lok	3.50 <i>0.138</i>	22.00 <i>0.866</i>	3.00 <i>0.118</i>	2.50mm Hex Drive	9.00	35.00	-
# BPM8SSLOK	M8	Ball	Stainless Steel with Long-Lok	5.00 <i>0.197</i>	16.00 <i>0.630</i>	1.50 <i>0.059</i>	1.20mm Slotted Drive	15.00	30.00	-

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm <i>inches</i>	Body Length (L) mm <i>inches</i>	Tip Length (H) mm <i>inches</i>	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm <i>inches</i>
BPM8SS	M8	Ball	Stainless Steel 1.4305 (303S21/3)	5.00 <i>0.197</i>	16.00 <i>0.630</i>	1.50 <i>0.059</i>	1.20mm Slotted Drive	15.00	30.00	-
BPM8	M8	Ball	Steel	5.00 <i>0.197</i>	16.00 <i>0.630</i>	1.50 <i>0.059</i>	1.20mm Slotted Drive	15.00	30.00	-
# BPM8LOK	M8	Ball	Steel with Long-Lok	5.00 <i>0.197</i>	16.00 <i>0.630</i>	1.50 <i>0.059</i>	1.20mm Slotted Drive	15.00	30.00	-
GN.33302	M8	Ball	Acetal Body / Hard Stainless Ball	5.00 <i>0.197</i>	16.00 <i>0.630</i>	1.50 <i>0.059</i>	Slotted - Size Not Specified	20.00	35.00	-
# GN.33322	M8	Ball	Acetal Body / Acetal Ball	5.00 <i>0.197</i>	16.00 <i>0.630</i>	1.50 <i>0.059</i>	Slotted - Size Not Specified	20.00	35.00	-
# GN.34252	M10.0	Long Stroke / Pressure Pin	Black Oxide Steel	4.00 <i>0.157</i>	35.00 <i>1.378</i>	8.00 <i>0.315</i>	Hex Drive	6.00	16.00	7.80 <i>0.307</i>
# BSM10PLOK	M10.0	Pressure Pin	Plastic End - Steel Body with Long-Lok	4.00 <i>0.157</i>	22.00 <i>0.866</i>	3.00 <i>0.118</i>	3.00mm Hex Drive	9.00	35.00	-
# BSM10P	M10.0	Pressure Pin	Plastic End - Steel Body	4.00 <i>0.157</i>	22.00 <i>0.866</i>	3.00 <i>0.118</i>	3.00mm Hex Drive	9.00	35.00	-

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
# BSM10SSLOK	M10.0	Pressure Pin	Stainless Steel 1.4305 with Long-Lok	4.00	22.00	3.00	3.00mm Hex Drive	8.00	31.00	-
				<i>0.157</i>	<i>0.866</i>	<i>0.118</i>				
# BSM10SS	M10.0	Pressure Pin	Stainless Steel 1.4305 (303S21/3)	4.00	22.00	3.00	3.00mm Hex Drive	8.00	31.00	-
				<i>0.157</i>	<i>0.866</i>	<i>0.118</i>				
# BSM10	M10.0	Pressure Pin	Steel	4.00	22.00	3.00	3.00mm Hex Drive	9.00	35.00	-
				<i>0.157</i>	<i>0.866</i>	<i>0.118</i>				
# BSM10LOK	M10.0	Pressure Pin	Steel with Long-Lok	4.00	22.00	3.00	3.00mm Hex Drive	9.00	35.00	-
				<i>0.157</i>	<i>0.866</i>	<i>0.118</i>				
# BPM10SSLOK	M10.0	Ball	Stainless Steel with Long-Lok	6.00	19.00	2.00	1.60mm Slotted Drive	20.00	35.00	-
				<i>0.236</i>	<i>0.748</i>	<i>0.079</i>				
BPM10SS	M10.0	Ball	Stainless Steel 1.4305 (303S21/3)	6.00	19.00	2.00	1.60mm Slotted Drive	20.00	35.00	-
				<i>0.236</i>	<i>0.748</i>	<i>0.079</i>				
BPM10	M10.0	Ball	Steel	6.00	19.00	2.00	1.60mm Slotted Drive	20.00	35.00	-
				<i>0.236</i>	<i>0.748</i>	<i>0.079</i>				
# BPM10LOK	M10.0	Ball	Steel with Long-Lok	6.00	19.00	2.00	1.60mm Slotted Drive	20.00	35.00	-
				<i>0.236</i>	<i>0.748</i>	<i>0.079</i>				

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
# GN.33323	M10.0	Ball	Acetal Body / Acetal Ball	6.00 <i>0.236</i>	19.00 <i>0.748</i>	2.00 <i>0.079</i>	Slotted - Size Not Specified	20.00	45.00	-
# GN.33303	M10.0	Ball	Acetal Body / Hard Stainless Ball	6.00 <i>0.236</i>	19.00 <i>0.748</i>	2.00 <i>0.079</i>	Slotted - Size Not Specified	20.00	45.00	-
# GN.34264	M12.0	Long Stroke / Pressure Pin	Black Oxide Steel	5.50 <i>0.217</i>	43.00 <i>1.693</i>	10.00 <i>0.394</i>	Hex Drive	12.00	44.00	9.50 <i>0.374</i>
# GN.34254	M12.0	Long Stroke / Pressure Pin	Black Oxide Steel	5.50 <i>0.217</i>	43.00 <i>1.693</i>	10.00 <i>0.394</i>	Hex Drive	4.00	18.00	9.50 <i>0.374</i>
# BSM12PLOK	M12.0	Pressure Pin	Plastic End - Steel Body with Long-Lok	6.00 <i>0.236</i>	28.00 <i>1.102</i>	4.00 <i>0.157</i>	4.00mm Hex Drive	10.00	55.00	-
# BSM12P	M12.0	Pressure Pin	Plastic End - Steel Body	6.00 <i>0.236</i>	28.00 <i>1.102</i>	4.00 <i>0.157</i>	4.00mm Hex Drive	10.00	55.00	-
# BSM12SSL0K	M12.0	Pressure Pin	Stainless Steel 1.4305 with Long-Lok	6.00 <i>0.236</i>	28.00 <i>1.102</i>	4.00 <i>0.157</i>	4.00mm Hex Drive	10.00	47.00	-

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
# BSM12SS	M12.0	Pressure Pin	Stainless Steel 1.4305 (303S21/3)	6.00 <i>0.236</i>	28.00 <i>1.102</i>	4.00 <i>0.157</i>	4.00mm Hex Drive	10.00	47.00	-
# BSM12	M12.0	Pressure Pin	Steel	6.00 <i>0.236</i>	28.00 <i>1.102</i>	4.00 <i>0.157</i>	4.00mm Hex Drive	10.00	55.00	-
# BSM12LOK	M12.0	Pressure Pin	Steel with Long-Lok	6.00 <i>0.236</i>	28.00 <i>1.102</i>	4.00 <i>0.157</i>	4.00mm Hex Drive	10.00	55.00	-
# BPM12SS	M12.0	Ball	Stainless Steel 1.4305 (303S21/3)	8.00 <i>0.315</i>	22.00 <i>0.866</i>	2.50 <i>0.098</i>	2.00mm Slotted Drive	30.00	55.00	-
# BPM12SSLOK	M12.0	Ball	Stainless Steel with Long-Lok	8.00 <i>0.315</i>	22.00 <i>0.866</i>	2.50 <i>0.098</i>	2.00mm Slotted Drive	30.00	55.00	-
# BPM12	M12.0	Ball	Steel	8.00 <i>0.315</i>	22.00 <i>0.866</i>	2.50 <i>0.098</i>	2.00mm Slotted Drive	30.00	55.00	-
# BPM12LOK	M12.0	Ball	Steel with Long-Lok	8.00 <i>0.315</i>	22.00 <i>0.866</i>	2.50 <i>0.098</i>	2.00mm Slotted Drive	30.00	55.00	-
# GN.34259	M16.0	Long Stroke / Pressure Pin	Black Oxide Steel	8.00 <i>0.315</i>	98.00 <i>3.858</i>	30.00 <i>1.181</i>	Hex Drive	13.00	47.00	13.40 <i>0.528</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm	Body Length (L) mm	Tip Length (H) mm	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm
				<i>inches</i>	<i>inches</i>	<i>inches</i>				<i>inches</i>
# GN.34257	M16.0	Long Stroke / Pressure Pin	Black Oxide Steel	8.00	58.00	20.00	Hex Drive	4.00	23.00	13.40
				<i>0.315</i>	<i>2.283</i>	<i>0.787</i>				<i>0.528</i>
# GN.34266	M16.0	Long Stroke / Pressure Pin	Black Oxide Steel	8.00	58.00	15.00	Hex Drive	10.00	57.00	13.40
				<i>0.315</i>	<i>2.283</i>	<i>0.591</i>				<i>0.528</i>
# GN.34269	M16.0	Long Stroke / Pressure Pin	Black Oxide Steel	8.00	98.00	30.00	Hex Drive	20.00	80.00	13.40
				<i>0.315</i>	<i>3.858</i>	<i>1.181</i>				<i>0.528</i>
# GN.34256	M16.0	Long Stroke / Pressure Pin	Black Oxide Steel	8.00	58.00	15.00	Hex Drive	9.00	33.00	13.40
				<i>0.315</i>	<i>2.283</i>	<i>0.591</i>				<i>0.528</i>
# BSM16PLOK	M16.0	Pressure Pin	Plastic End - Steel Body with Long-Lok	7.50	32.00	5.00	5.00mm Hex Drive	45.00	100.00	-
				<i>0.295</i>	<i>1.260</i>	<i>0.197</i>				
# BSM16P	M16.0	Pressure Pin	Plastic End - Steel Body	7.50	32.00	5.00	5.00mm Hex Drive	45.00	100.00	-
				<i>0.295</i>	<i>1.260</i>	<i>0.197</i>				
# BSM16	M16.0	Pressure Pin	Steel	7.50	32.00	5.00	5.00mm Hex Drive	45.00	100.00	-
				<i>0.295</i>	<i>1.260</i>	<i>0.197</i>				
# BSM16LOK	M16.0	Pressure Pin	Steel with Long-Lok	7.50	32.00	5.00	5.00mm Hex Drive	45.00	100.00	-
				<i>0.295</i>	<i>1.260</i>	<i>0.197</i>				

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Plungers - Spring - Threaded

Part Number	Thread Size (D)	End Type	Material	Tip Diameter (D1) mm <i>inches</i>	Body Length (L) mm <i>inches</i>	Tip Length (H) mm <i>inches</i>	Drive	Initial Pressure (F1) N	Final Pressure (F2) N	Body Dia. (Long Stroke) d2 mm <i>inches</i>
# BPM16SSLOK	M16.0	Ball	Stainless Steel with Long-Lok	10.00 <i>0.394</i>	24.00 <i>0.945</i>	3.50 <i>0.138</i>	2.50mm Slotted Drive	65.00	125.00	-
# BPM16SS	M16.0	Ball	Stainless Steel 1.4305 (303S21/3)	10.00 <i>0.394</i>	24.00 <i>0.945</i>	3.50 <i>0.138</i>	2.50mm Slotted Drive	65.00	125.00	-
BPM16	M16.0	Ball	Steel	10.00 <i>0.394</i>	24.00 <i>0.945</i>	3.50 <i>0.138</i>	2.50mm Slotted Drive	65.00	125.00	-
# BPM16LOK	M16.0	Ball	Steel with Long-Lok	10.00 <i>0.394</i>	24.00 <i>0.945</i>	3.50 <i>0.138</i>	2.50mm Slotted Drive	65.00	125.00	-
# BSM20	M20.0	Pressure Pin	Steel	10.00 <i>0.394</i>	40.00 <i>1.575</i>	7.00 <i>0.276</i>	6.00mm Hex Drive	60.00	120.00	-
# BPM20SS	M20.0	Ball	Stainless Steel 1.4305 (303S21/3)	12.00 <i>0.472</i>	30.00 <i>1.181</i>	4.50 <i>0.177</i>	2.50mm Slotted Drive	80.00	160.00	-
BPM20	M20.0	Ball	Steel	12.00 <i>0.472</i>	30.00 <i>1.181</i>	4.50 <i>0.177</i>	2.50mm Slotted Drive	80.00	160.00	-
# BSM24	M24.0	Pressure Pin	Steel	12.00 <i>0.472</i>	52.00 <i>2.047</i>	10.00 <i>0.394</i>	8.00mm Hex Drive	80.00	130.00	-

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to [catalogues@minibearings.com.au](mailto:catalogues@minibearings.com.au)

