




MBA

Power Supplies

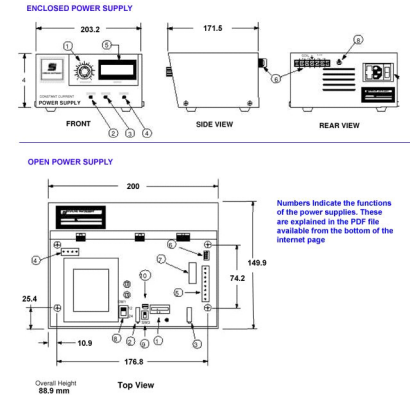

24 V DC.

Standard : 24V DC Output, 110V AC input.

Available on special order : 12V DC Output, 220/230V AC input.

This catalogue to be read in conjunction with information at <http://www.minibearings.com.au/ogue/tech/power/psup.pdf>

Power Supplies

Part Number	Type	Output Power W	Input Voltage V	For Use With	Other Info	Output Voltage V
# S90MPS-24MCF	Enclosed	22	110V AC	Follower Arm Potentiometer Terminals	-	0-24 V DC
# S90MPS-24MC	Enclosed	22	110V AC	Ground, & 0.10 Volt Input Signal	-	0-24 V DC
# S90MPS-24M	Open	22.00	110V AC	-	With Ammeter	0-24 V DC
# S90MPS-24	Open	22	110V AC (50..60Hz)	S90MPU-BIP67 Ultrasonoc Sensor	Without Ammeter	0-24 V DC

Indicates item not stocked at time of printing - Please enquire for lead time
 E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
 MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Power Supplies

Part Number	Type	Output Power W	Input Voltage V	For Use With	Other Info	Output Voltage V
# MP3078	Swichmode Bench Power Supply	13.8V DC	190 - 240V AC	YG2738	Measures: 80 (H) x 170 (W) x 205 (D)	0 - 20amp

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au

