




MBA

Pulleys - Timing - 2.000mm Pitch - GT

Timing Pulleys to suit GT 2mm Pitch Timing Belts.

Various materials as shown.

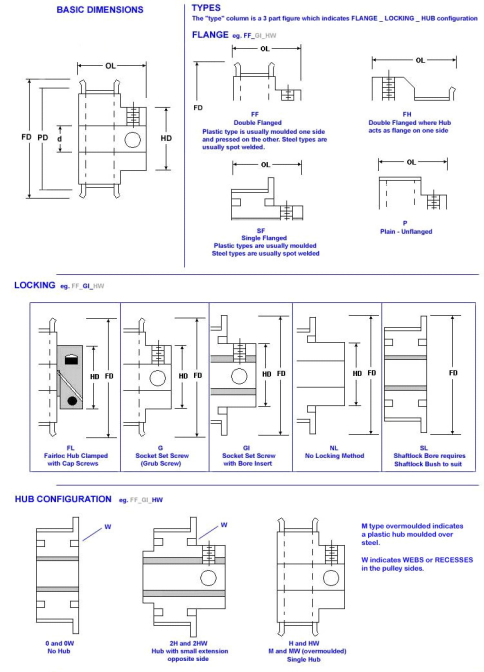

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-012-030FH-ALA-SET-03.000	12	3.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	7.64	12.2	11.10	12.20
		<i>0.118</i>	<i>0.118</i>				<i>0.301</i>	<i>0.480</i>	<i>0.437</i>	<i>0.480</i>
# P-G2-012-030FH-ALA-SET-03.175	12	3.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	7.64	12.2	11.11	12.19
		<i>0.118</i>	<i>0.125</i>				<i>0.301</i>	<i>0.480</i>	<i>0.437</i>	<i>0.480</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-012-060FH-ALA-SET-03.000	12	6.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	7.64	12.2	14.30	12.20
		<i>0.236</i>	<i>0.118</i>				<i>0.301</i>	<i>0.480</i>	<i>0.563</i>	<i>0.480</i>
P-G2-012-060FF-PFR-NIL-03.175	12	6.0	3.175	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	7.64	11.9	17.46	11.11
		<i>0.236</i>	<i>0.125</i>				<i>0.301</i>	<i>0.469</i>	<i>0.687</i>	<i>0.437</i>
# P-G2-012-060FH-ALA-SET-03.175	12	6.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	7.64	12.2	14.29	12.19
		<i>0.236</i>	<i>0.125</i>				<i>0.301</i>	<i>0.480</i>	<i>0.563</i>	<i>0.480</i>
# P-G2-012-060FF-PFR-NIL-04.000	12	6.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	7.64	12.0	17.50	11.00
		<i>0.236</i>	<i>0.157</i>				<i>0.301</i>	<i>0.472</i>	<i>0.689</i>	<i>0.433</i>
# P-G2-012-090FH-ALA-SET-03.000	12	9.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	7.64	12.2	17.50	12.20
		<i>0.354</i>	<i>0.118</i>				<i>0.301</i>	<i>0.480</i>	<i>0.689</i>	<i>0.480</i>
# P-G2-012-090FH-ALA-SET-03.175	12	9.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	7.64	12.2	17.46	12.19
		<i>0.354</i>	<i>0.125</i>				<i>0.301</i>	<i>0.480</i>	<i>0.687</i>	<i>0.480</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-013-030FH-ALA-SET-03.000	13	3.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.27	12.8	11.10	12.80
		<i>0.118</i>	<i>0.118</i>				<i>0.326</i>	<i>0.504</i>	<i>0.437</i>	<i>0.504</i>
# P-G2-013-030FH-ALA-SET-03.175	13	3.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.27	12.8	11.11	12.83
		<i>0.118</i>	<i>0.125</i>				<i>0.326</i>	<i>0.504</i>	<i>0.437</i>	<i>0.505</i>
# P-G2-013-060FH-ALA-SET-03.000	13	6.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.27	12.8	14.30	12.80
		<i>0.236</i>	<i>0.118</i>				<i>0.326</i>	<i>0.504</i>	<i>0.563</i>	<i>0.504</i>
# P-G2-013-060FH-ALA-SET-03.175	13	6.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.27	12.8	14.29	12.83
		<i>0.236</i>	<i>0.125</i>				<i>0.326</i>	<i>0.504</i>	<i>0.563</i>	<i>0.505</i>
# P-G2-013-060FF-PFR-NIL-03.175	13	6.0	3.175	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	8.27	13.0	17.46	11.11
		<i>0.236</i>	<i>0.125</i>				<i>0.326</i>	<i>0.512</i>	<i>0.687</i>	<i>0.437</i>
# P-G2-013-060FF-PFR-NIL-04.000	13	6.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	8.27	13.0	17.50	11.00
		<i>0.236</i>	<i>0.157</i>				<i>0.326</i>	<i>0.512</i>	<i>0.689</i>	<i>0.433</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-013-090FH-ALA-SET-03.000	13	9.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.27	12.8	17.50	12.80
		<i>0.354</i>	<i>0.118</i>				<i>0.326</i>	<i>0.504</i>	<i>0.689</i>	<i>0.504</i>
# P-G2-013-090FH-ALA-SET-03.175	13	9.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.27	12.8	17.46	12.83
		<i>0.354</i>	<i>0.125</i>				<i>0.326</i>	<i>0.504</i>	<i>0.687</i>	<i>0.505</i>
P-G2-014-030FH-ALA-SET-03.000	14	3.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.91	13.5	11.10	1.50
		<i>0.118</i>	<i>0.118</i>				<i>0.351</i>	<i>0.531</i>	<i>0.437</i>	<i>0.059</i>
# P-G2-014-030FH-ALA-SET-03.175	14	3.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.91	13.5	11.11	13.46
		<i>0.118</i>	<i>0.125</i>				<i>0.351</i>	<i>0.531</i>	<i>0.437</i>	<i>0.530</i>
# P-G2-014-060FH-ALA-SET-03.000	14	6.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.91	13.5	14.30	1.50
		<i>0.236</i>	<i>0.118</i>				<i>0.351</i>	<i>0.531</i>	<i>0.563</i>	<i>0.059</i>
# P-G2-014-060FF-PFR-NIL-03.175	14	6.0	3.175	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	8.91	13.5	17.46	11.11
		<i>0.236</i>	<i>0.125</i>				<i>0.351</i>	<i>0.531</i>	<i>0.687</i>	<i>0.437</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-014-060FH-ALA-SET-03.175	14	6.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.91	13.5	14.29	13.46
		<i>0.236</i>	<i>0.125</i>				<i>0.351</i>	<i>0.531</i>	<i>0.563</i>	<i>0.530</i>
# P-G2-014-060FF-PFR-NIL-04.000	14	6.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	8.91	13.0	17.50	11.00
		<i>0.236</i>	<i>0.157</i>				<i>0.351</i>	<i>0.512</i>	<i>0.689</i>	<i>0.433</i>
# P-G2-014-090FH-ALA-SET-03.000	14	9.0	3.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.91	13.5	17.50	1.50
		<i>0.354</i>	<i>0.118</i>				<i>0.351</i>	<i>0.531</i>	<i>0.689</i>	<i>0.059</i>
# P-G2-014-090FH-ALA-SET-03.175	14	9.0	3.175	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	8.91	13.5	17.46	13.46
		<i>0.354</i>	<i>0.125</i>				<i>0.351</i>	<i>0.531</i>	<i>0.687</i>	<i>0.530</i>
P-G2-015-030FH-ALA-SET-04.000	15	3.0	4.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	9.55	14.1	11.10	14.10
		<i>0.118</i>	<i>0.157</i>				<i>0.376</i>	<i>0.555</i>	<i>0.437</i>	<i>0.555</i>
# P-G2-015-030FH-ALA-SET-04.763	15	3.0	4.763	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	9.55	15.0	11.11	14.97
		<i>0.118</i>	<i>0.188</i>				<i>0.376</i>	<i>0.591</i>	<i>0.437</i>	<i>0.589</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-015-060FF-PFR-NIL-03.175	15	6.0	3.175	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	9.55	14.0	17.46	11.11
		<i>0.236</i>	<i>0.125</i>				<i>0.376</i>	<i>0.551</i>	<i>0.687</i>	<i>0.437</i>
P-G2-015-060FF-PFR-NIL-04.000	15	6.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	9.55	14.0	17.50	11.00
		<i>0.236</i>	<i>0.157</i>				<i>0.376</i>	<i>0.551</i>	<i>0.689</i>	<i>0.433</i>
# P-G2-015-060FH-ALA-SET-04.000	15	6.0	4.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	9.55	14.1	14.30	14.10
		<i>0.236</i>	<i>0.157</i>				<i>0.376</i>	<i>0.555</i>	<i>0.563</i>	<i>0.555</i>
# P-G2-015-060FH-ALA-FLC-04.763	15	6.0	4.763	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	9.55	15.0	14.29	14.73
		<i>0.236</i>	<i>0.188</i>				<i>0.376</i>	<i>0.591</i>	<i>0.563</i>	<i>0.580</i>
# P-G2-015-060FH-ALA-SET-04.763	15	6.0	4.763	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	9.55	15.0	14.29	14.97
		<i>0.236</i>	<i>0.188</i>				<i>0.376</i>	<i>0.591</i>	<i>0.563</i>	<i>0.589</i>
# P-G2-015-060FH-ALA-FLC-05.00	15	6.0	5.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	9.55	14.1	14.30	14.70
		<i>0.236</i>	<i>0.197</i>				<i>0.376</i>	<i>0.555</i>	<i>0.563</i>	<i>0.579</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-015-090FH-ALA-SET-04.000	15	9.0	4.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	9.55	14.1	17.50	14.10
		<i>0.354</i>	<i>0.157</i>				<i>0.376</i>	<i>0.555</i>	<i>0.689</i>	<i>0.555</i>
# P-G2-015-090FH-ALA-SET-04.763	15	9.0	4.763	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	9.55	15.0	17.46	14.97
		<i>0.354</i>	<i>0.188</i>				<i>0.376</i>	<i>0.591</i>	<i>0.687</i>	<i>0.589</i>
# P-G2-016-030FH-ALA-SET-04.000	16	3.0	4.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.18	14.7	11.10	14.70
		<i>0.118</i>	<i>0.157</i>				<i>0.401</i>	<i>0.579</i>	<i>0.437</i>	<i>0.579</i>
# P-G2-016-030FH-ALA-SET-04.763	16	3.0	4.763	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.18	14.7	11.11	14.73
		<i>0.118</i>	<i>0.188</i>				<i>0.401</i>	<i>0.579</i>	<i>0.437</i>	<i>0.580</i>
# P-G2-016-060FF-PFR-NIL-03.175	16	6.0	3.175	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	10.18	14.7	17.46	11.11
		<i>0.236</i>	<i>0.125</i>				<i>0.401</i>	<i>0.579</i>	<i>0.687</i>	<i>0.437</i>
# P-G2-016-060FH-ALA-SET-04.000	16	6.0	4.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.18	14.7	14.30	14.70
		<i>0.236</i>	<i>0.157</i>				<i>0.401</i>	<i>0.579</i>	<i>0.563</i>	<i>0.579</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-016-060FF-PFR-NIL-04.000	16	6.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	10.18	15.0	17.50	11.00
		<i>0.236</i>	<i>0.157</i>				<i>0.401</i>	<i>0.591</i>	<i>0.689</i>	<i>0.433</i>
# P-G2-016-060FH-ALA-FLC-04.763	16	6.0	4.763	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	10.18	14.7	14.29	14.73
		<i>0.236</i>	<i>0.188</i>				<i>0.401</i>	<i>0.579</i>	<i>0.563</i>	<i>0.580</i>
# P-G2-016-060FH-ALA-SET-04.763	16	6.0	4.763	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.18	14.7	14.29	14.73
		<i>0.236</i>	<i>0.188</i>				<i>0.401</i>	<i>0.579</i>	<i>0.563</i>	<i>0.580</i>
P-G2-016-060FH-ALA-FLC-05.00	16	6.0	5.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	10.18	14.7	14.30	14.70
		<i>0.236</i>	<i>0.197</i>				<i>0.401</i>	<i>0.579</i>	<i>0.563</i>	<i>0.579</i>
# P-G2-016-090FH-ALA-SET-04.000	16	9.0	4.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.18	14.7	17.50	14.70
		<i>0.354</i>	<i>0.157</i>				<i>0.401</i>	<i>0.579</i>	<i>0.689</i>	<i>0.579</i>
# P-G2-016-090FH-ALA-SET-04.763	16	9.0	4.763	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.18	14.7	17.46	14.73
		<i>0.354</i>	<i>0.188</i>				<i>0.401</i>	<i>0.579</i>	<i>0.687</i>	<i>0.580</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-017-030FF-ALA-SET-04.000	17	3.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	10.82	16.1	12.30	7.90
		<i>0.118</i>	<i>0.157</i>				<i>0.426</i>	<i>0.634</i>	<i>0.484</i>	<i>0.311</i>
# P-G2-017-030FF-ALA-SET-04.763	17	3.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	10.82	16.1	12.33	7.93
		<i>0.118</i>	<i>0.188</i>				<i>0.426</i>	<i>0.634</i>	<i>0.485</i>	<i>0.312</i>
# P-G2-017-030FH-ALA-SET-06.000	17	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.82	16.1	11.10	16.10
		<i>0.118</i>	<i>0.236</i>				<i>0.426</i>	<i>0.634</i>	<i>0.437</i>	<i>0.634</i>
# P-G2-017-030FH-ALA-SET-06.350	17	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.82	16.1	11.11	16.13
		<i>0.118</i>	<i>0.250</i>				<i>0.426</i>	<i>0.634</i>	<i>0.437</i>	<i>0.635</i>
P-G2-017-060FF-ALA-SET-04.000	17	6.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	10.82	16.1	15.90	7.90
		<i>0.236</i>	<i>0.157</i>				<i>0.426</i>	<i>0.634</i>	<i>0.626</i>	<i>0.311</i>
# P-G2-017-060FF-ALA-SET-04.763	17	6.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	10.82	16.1	15.88	7.93
		<i>0.236</i>	<i>0.188</i>				<i>0.426</i>	<i>0.634</i>	<i>0.625</i>	<i>0.312</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-017-060FH-ALA-SET-06.000	17	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.82	16.1	14.30	16.10
		<i>0.236</i>	<i>0.236</i>				<i>0.426</i>	<i>0.634</i>	<i>0.563</i>	<i>0.634</i>
P-G2-017-060FH-ALA-SET-06.350	17	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.82	16.1	14.29	16.13
		<i>0.236</i>	<i>0.250</i>				<i>0.426</i>	<i>0.634</i>	<i>0.563</i>	<i>0.635</i>
# P-G2-017-090FF-ALA-SET-04.000	17	9.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	10.82	16.1	19.10	7.90
		<i>0.354</i>	<i>0.157</i>				<i>0.426</i>	<i>0.634</i>	<i>0.752</i>	<i>0.311</i>
# P-G2-017-090FF-ALA-SET-04.763	17	9.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	10.82	16.1	19.50	7.93
		<i>0.354</i>	<i>0.188</i>				<i>0.426</i>	<i>0.634</i>	<i>0.768</i>	<i>0.312</i>
# P-G2-017-090FH-ALA-SET-06.000	17	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.82	16.1	17.50	16.10
		<i>0.354</i>	<i>0.236</i>				<i>0.426</i>	<i>0.634</i>	<i>0.689</i>	<i>0.634</i>
# P-G2-017-090FH-ALA-SET-06.350	17	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	10.82	16.1	17.46	16.13
		<i>0.354</i>	<i>0.250</i>				<i>0.426</i>	<i>0.634</i>	<i>0.687</i>	<i>0.635</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-018-030FF-ALA-SET-04.000	18	3.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	11.45	16.1	12.30	7.90
		<i>0.118</i>	<i>0.157</i>				<i>0.451</i>	<i>0.634</i>	<i>0.484</i>	<i>0.311</i>
# P-G2-018-030FF-ALA-SET-04.763	18	3.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	11.45	16.1	12.33	7.93
		<i>0.118</i>	<i>0.188</i>				<i>0.451</i>	<i>0.634</i>	<i>0.485</i>	<i>0.312</i>
# P-G2-018-030FH-ALA-SET-06.000	18	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	11.45	16.1	11.10	16.10
		<i>0.118</i>	<i>0.236</i>				<i>0.451</i>	<i>0.634</i>	<i>0.437</i>	<i>0.634</i>
# P-G2-018-030FH-ALA-SET-06.350	18	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	11.45	16.1	11.11	16.13
		<i>0.118</i>	<i>0.250</i>				<i>0.451</i>	<i>0.634</i>	<i>0.437</i>	<i>0.635</i>
# P-G2-018-060FF-ALA-SET-04.000	18	6.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	11.45	16.1	15.90	7.90
		<i>0.236</i>	<i>0.157</i>				<i>0.451</i>	<i>0.634</i>	<i>0.626</i>	<i>0.311</i>
# P-G2-018-060FH-ALA-FLC-04.763	18	6.0	4.763	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	11.45	16.1	14.29	15.88
		<i>0.236</i>	<i>0.188</i>				<i>0.451</i>	<i>0.634</i>	<i>0.563</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-018-060FF-ALA-SET-04.763	18	6.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	11.45	16.1	15.88	7.93
		<i>0.236</i>	<i>0.188</i>				<i>0.451</i>	<i>0.634</i>	<i>0.625</i>	<i>0.312</i>
# P-G2-018-060FF-PFR-NIL-04.763	18	6.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	11.45	16.2	17.46	12.70
		<i>0.236</i>	<i>0.188</i>				<i>0.451</i>	<i>0.638</i>	<i>0.687</i>	<i>0.500</i>
# P-G2-018-060FH-ALA-FLC-05.00	18	6.0	5.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	11.45	16.1	14.30	15.90
		<i>0.236</i>	<i>0.197</i>				<i>0.451</i>	<i>0.634</i>	<i>0.563</i>	<i>0.626</i>
# P-G2-018-060FF-PFR-NIL-06.000	18	6.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	11.45	16.0	17.50	13.00
		<i>0.236</i>	<i>0.236</i>				<i>0.451</i>	<i>0.630</i>	<i>0.689</i>	<i>0.512</i>
P-G2-018-060FH-ALA-SET-06.000	18	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	11.45	16.1	14.30	16.10
		<i>0.236</i>	<i>0.236</i>				<i>0.451</i>	<i>0.634</i>	<i>0.563</i>	<i>0.634</i>
# P-G2-018-060FH-ALA-SET-06.350	18	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	11.45	16.1	14.29	16.13
		<i>0.236</i>	<i>0.250</i>				<i>0.451</i>	<i>0.634</i>	<i>0.563</i>	<i>0.635</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-018-090FF-ALA-SET-04.000	18	9.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	11.45	16.1	19.10	7.90
		<i>0.354</i>	<i>0.157</i>				<i>0.451</i>	<i>0.634</i>	<i>0.752</i>	<i>0.311</i>
# P-G2-018-090FF-ALA-SET-04.763	18	9.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	11.45	16.1	19.50	7.93
		<i>0.354</i>	<i>0.188</i>				<i>0.451</i>	<i>0.634</i>	<i>0.768</i>	<i>0.312</i>
P-G2-018-090FH-ALA-SET-06.000	18	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	11.45	16.1	17.50	16.10
		<i>0.354</i>	<i>0.236</i>				<i>0.451</i>	<i>0.634</i>	<i>0.689</i>	<i>0.634</i>
# P-G2-018-090FH-ALA-SET-06.350	18	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	11.45	16.1	17.46	16.13
		<i>0.354</i>	<i>0.250</i>				<i>0.451</i>	<i>0.634</i>	<i>0.687</i>	<i>0.635</i>
# P-G2-019-030FF-ALA-SET-04.000	19	3.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.09	16.1	12.30	8.60
		<i>0.118</i>	<i>0.157</i>				<i>0.476</i>	<i>0.634</i>	<i>0.484</i>	<i>0.339</i>
# P-G2-019-030FF-ALA-SET-04.763	19	3.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.09	16.1	12.33	8.59
		<i>0.118</i>	<i>0.188</i>				<i>0.476</i>	<i>0.634</i>	<i>0.485</i>	<i>0.338</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-019-030FH-ALA-SET-06.000	19	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.09	16.1	11.10	16.10
		<i>0.118</i>	<i>0.236</i>				<i>0.476</i>	<i>0.634</i>	<i>0.437</i>	<i>0.634</i>
# P-G2-019-030FH-ALA-SET-06.350	19	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.09	16.1	11.11	16.13
		<i>0.118</i>	<i>0.250</i>				<i>0.476</i>	<i>0.634</i>	<i>0.437</i>	<i>0.635</i>
# P-G2-019-060FF-ALA-SET-04.000	19	6.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.09	16.1	15.90	8.60
		<i>0.236</i>	<i>0.157</i>				<i>0.476</i>	<i>0.634</i>	<i>0.626</i>	<i>0.339</i>
# P-G2-019-060FF-ALA-SET-04.763	19	6.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.09	16.1	15.88	8.59
		<i>0.236</i>	<i>0.188</i>				<i>0.476</i>	<i>0.634</i>	<i>0.625</i>	<i>0.338</i>
# P-G2-019-060FH-ALA-SET-06.000	19	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.09	16.1	14.30	16.10
		<i>0.236</i>	<i>0.236</i>				<i>0.476</i>	<i>0.634</i>	<i>0.563</i>	<i>0.634</i>
# P-G2-019-060FH-ALA-SET-06.350	19	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.09	16.1	14.29	16.13
		<i>0.236</i>	<i>0.250</i>				<i>0.476</i>	<i>0.634</i>	<i>0.563</i>	<i>0.635</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-019-090FF-ALA-SET-04.000	19	9.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.09	16.1	19.10	8.60
		<i>0.354</i>	<i>0.157</i>				<i>0.476</i>	<i>0.634</i>	<i>0.752</i>	<i>0.339</i>
# P-G2-019-090FF-ALA-SET-04.763	19	9.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.09	16.1	19.50	8.59
		<i>0.354</i>	<i>0.188</i>				<i>0.476</i>	<i>0.634</i>	<i>0.768</i>	<i>0.338</i>
# P-G2-019-090FH-ALA-SET-06.000	19	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.09	16.1	17.50	16.10
		<i>0.354</i>	<i>0.236</i>				<i>0.476</i>	<i>0.634</i>	<i>0.689</i>	<i>0.634</i>
# P-G2-019-090FH-ALA-SET-06.350	19	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.09	16.1	17.46	16.13
		<i>0.354</i>	<i>0.250</i>				<i>0.476</i>	<i>0.634</i>	<i>0.687</i>	<i>0.635</i>
# P-G2-020-030FF-ALA-SET-04.000	20	3.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.73	17.4	12.30	9.20
		<i>0.118</i>	<i>0.157</i>				<i>0.501</i>	<i>0.685</i>	<i>0.484</i>	<i>0.362</i>
# P-G2-020-030FF-ALA-SET-04.763	20	3.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.73	17.4	12.33	9.25
		<i>0.118</i>	<i>0.188</i>				<i>0.501</i>	<i>0.685</i>	<i>0.485</i>	<i>0.364</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-020-030FH-ALA-SET-06.000	20	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.73	17.4	11.10	17.40
		<i>0.118</i>	<i>0.236</i>				<i>0.501</i>	<i>0.685</i>	<i>0.437</i>	<i>0.685</i>
# P-G2-020-030FH-ALA-SET-06.350	20	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.73	17.4	11.11	9.78
		<i>0.118</i>	<i>0.250</i>				<i>0.501</i>	<i>0.685</i>	<i>0.437</i>	<i>0.385</i>
# P-G2-020-060FF-ALA-SET-04.000	20	6.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.73	17.4	15.90	9.20
		<i>0.236</i>	<i>0.157</i>				<i>0.501</i>	<i>0.685</i>	<i>0.626</i>	<i>0.362</i>
# P-G2-020-060FF-ALA-SET-04.763	20	6.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.73	17.4	15.88	9.25
		<i>0.236</i>	<i>0.188</i>				<i>0.501</i>	<i>0.685</i>	<i>0.625</i>	<i>0.364</i>
# P-G2-020-060FF-PFR-NIL-04.763	20	6.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	12.73	17.3	17.46	12.70
		<i>0.236</i>	<i>0.188</i>				<i>0.501</i>	<i>0.681</i>	<i>0.687</i>	<i>0.500</i>
# P-G2-020-060FH-ALA-FLC-04.763	20	6.0	4.763	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	12.73	17.4	14.29	15.88
		<i>0.236</i>	<i>0.188</i>				<i>0.501</i>	<i>0.685</i>	<i>0.563</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-020-060FH-ALA-FLC-05.00	20	6.0	5.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	12.73	17.4	14.30	15.90
		<i>0.236</i>	<i>0.197</i>				<i>0.501</i>	<i>0.685</i>	<i>0.563</i>	<i>0.626</i>
P-G2-020-060FF-PFR-NIL-06.000	20	6.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	12.73	17.0	17.50	13.00
		<i>0.236</i>	<i>0.236</i>				<i>0.501</i>	<i>0.669</i>	<i>0.689</i>	<i>0.512</i>
# P-G2-020-060FH-ALA-SET-06.000	20	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.73	17.4	14.30	17.40
		<i>0.236</i>	<i>0.236</i>				<i>0.501</i>	<i>0.685</i>	<i>0.563</i>	<i>0.685</i>
P-G2-020-060FH-ALA-SET-06.350	20	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.73	17.4	14.29	17.40
		<i>0.236</i>	<i>0.250</i>				<i>0.501</i>	<i>0.685</i>	<i>0.563</i>	<i>0.685</i>
# P-G2-020-090FF-ALA-SET-04.000	20	9.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.73	17.4	19.10	9.20
		<i>0.354</i>	<i>0.157</i>				<i>0.501</i>	<i>0.685</i>	<i>0.752</i>	<i>0.362</i>
# P-G2-020-090FF-ALA-SET-04.763	20	9.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	12.73	17.4	19.50	9.25
		<i>0.354</i>	<i>0.188</i>				<i>0.501</i>	<i>0.685</i>	<i>0.768</i>	<i>0.364</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-020-090FH-ALA-SET-06.000	20	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.73	17.4	17.50	17.40
		<i>0.354</i>	<i>0.236</i>				<i>0.501</i>	<i>0.685</i>	<i>0.689</i>	<i>0.685</i>
# P-G2-020-090FH-ALA-SET-06.350	20	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	12.73	17.4	17.46	17.40
		<i>0.354</i>	<i>0.250</i>				<i>0.501</i>	<i>0.685</i>	<i>0.687</i>	<i>0.685</i>
# P-G2-021-030FF-ALA-SET-04.000	21	3.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	13.36	18.0	12.30	9.90
		<i>0.118</i>	<i>0.157</i>				<i>0.526</i>	<i>0.709</i>	<i>0.484</i>	<i>0.390</i>
# P-G2-021-030FF-ALA-SET-04.763	21	3.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	13.36	18.3	12.33	9.96
		<i>0.118</i>	<i>0.188</i>				<i>0.526</i>	<i>0.720</i>	<i>0.485</i>	<i>0.392</i>
# P-G2-021-030FH-ALA-SET-06.000	21	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	13.36	18.0	11.10	18.80
		<i>0.118</i>	<i>0.236</i>				<i>0.526</i>	<i>0.709</i>	<i>0.437</i>	<i>0.740</i>
# P-G2-021-030FH-ALA-SET-06.350	21	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	13.36	18.3	11.11	18.34
		<i>0.118</i>	<i>0.250</i>				<i>0.526</i>	<i>0.720</i>	<i>0.437</i>	<i>0.722</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-021-060FF-ALA-SET-04.000	21	6.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	13.36	18.0	15.90	9.90
		<i>0.236</i>	<i>0.157</i>				<i>0.526</i>	<i>0.709</i>	<i>0.626</i>	<i>0.390</i>
# P-G2-021-060FF-ALA-SET-04.763	21	6.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	13.36	18.3	15.88	9.96
		<i>0.236</i>	<i>0.188</i>				<i>0.526</i>	<i>0.720</i>	<i>0.625</i>	<i>0.392</i>
# P-G2-021-060FF-PFR-NIL-04.763	21	6.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	13.36	17.8	17.46	12.70
		<i>0.236</i>	<i>0.188</i>				<i>0.526</i>	<i>0.701</i>	<i>0.687</i>	<i>0.500</i>
# P-G2-021-060FF-PFR-NIL-06.000	21	6.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	13.36	18.0	17.50	13.00
		<i>0.236</i>	<i>0.236</i>				<i>0.526</i>	<i>0.709</i>	<i>0.689</i>	<i>0.512</i>
# P-G2-021-060FH-ALA-SET-06.000	21	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	13.36	18.0	14.30	18.80
		<i>0.236</i>	<i>0.236</i>				<i>0.526</i>	<i>0.709</i>	<i>0.563</i>	<i>0.740</i>
# P-G2-021-060FH-ALA-SET-06.350	21	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	13.36	18.3	14.29	18.34
		<i>0.236</i>	<i>0.250</i>				<i>0.526</i>	<i>0.720</i>	<i>0.563</i>	<i>0.722</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-021-090FF-ALA-SET-04.000	21	9.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	13.36	18.0	19.10	9.90
		<i>0.354</i>	<i>0.157</i>				<i>0.526</i>	<i>0.709</i>	<i>0.752</i>	<i>0.390</i>
# P-G2-021-090FF-ALA-SET-04.763	21	9.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	13.36	18.3	19.50	9.96
		<i>0.354</i>	<i>0.188</i>				<i>0.526</i>	<i>0.720</i>	<i>0.768</i>	<i>0.392</i>
# P-G2-021-090FH-ALA-SET-06.000	21	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	13.36	18.0	17.50	18.80
		<i>0.354</i>	<i>0.236</i>				<i>0.526</i>	<i>0.709</i>	<i>0.689</i>	<i>0.740</i>
# P-G2-021-090FH-ALA-SET-06.350	21	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	13.36	18.3	17.46	18.34
		<i>0.354</i>	<i>0.250</i>				<i>0.526</i>	<i>0.720</i>	<i>0.687</i>	<i>0.722</i>
P-G2-022-030FF-ALA-SET-04.000	22	3.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	14.00	18.8	12.30	9.90
		<i>0.118</i>	<i>0.157</i>				<i>0.551</i>	<i>0.740</i>	<i>0.484</i>	<i>0.390</i>
# P-G2-022-030FF-ALA-SET-04.763	22	3.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	14.00	18.8	12.33	9.96
		<i>0.118</i>	<i>0.188</i>				<i>0.551</i>	<i>0.740</i>	<i>0.485</i>	<i>0.392</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-022-030FH-ALA-SET-06.000	22	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	14.00	18.8	11.10	18.80
		<i>0.118</i>	<i>0.236</i>				<i>0.551</i>	<i>0.740</i>	<i>0.437</i>	<i>0.740</i>
# P-G2-022-030FH-ALA-SET-06.350	22	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	14.00	18.8	11.11	18.80
		<i>0.118</i>	<i>0.250</i>				<i>0.551</i>	<i>0.740</i>	<i>0.437</i>	<i>0.740</i>
# P-G2-022-060FF-ALA-SET-04.000	22	6.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	14.00	18.8	15.90	9.90
		<i>0.236</i>	<i>0.157</i>				<i>0.551</i>	<i>0.740</i>	<i>0.626</i>	<i>0.390</i>
# P-G2-022-060FH-ALA-FLC-04.763	22	6.0	4.763	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	14.00	18.8	14.29	15.88
		<i>0.236</i>	<i>0.188</i>				<i>0.551</i>	<i>0.740</i>	<i>0.563</i>	<i>0.625</i>
# P-G2-022-060FF-ALA-SET-04.763	22	6.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	14.00	18.8	15.88	9.96
		<i>0.236</i>	<i>0.188</i>				<i>0.551</i>	<i>0.740</i>	<i>0.625</i>	<i>0.392</i>
# P-G2-022-060FF-PFR-NIL-04.763	22	6.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	14.00	18.5	17.46	12.70
		<i>0.236</i>	<i>0.188</i>				<i>0.551</i>	<i>0.728</i>	<i>0.687</i>	<i>0.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-022-060FH-ALA-FLC-05.00	22	6.0	5.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	14.00	18.8	14.30	15.90
		<i>0.236</i>	<i>0.197</i>				<i>0.551</i>	<i>0.740</i>	<i>0.563</i>	<i>0.626</i>
# P-G2-022-060FH-ALA-SET-06.000	22	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	14.00	18.8	14.30	18.80
		<i>0.236</i>	<i>0.236</i>				<i>0.551</i>	<i>0.740</i>	<i>0.563</i>	<i>0.740</i>
P-G2-022-060FF-PFR-NIL-06.000	22	6.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	14.00	19.0	17.50	13.00
		<i>0.236</i>	<i>0.236</i>				<i>0.551</i>	<i>0.748</i>	<i>0.689</i>	<i>0.512</i>
# P-G2-022-060FH-ALA-SET-06.350	22	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	14.00	18.8	14.29	18.80
		<i>0.236</i>	<i>0.250</i>				<i>0.551</i>	<i>0.740</i>	<i>0.563</i>	<i>0.740</i>
# P-G2-022-090FF-ALA-SET-04.000	22	9.0	4.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	14.00	18.8	19.10	9.90
		<i>0.354</i>	<i>0.157</i>				<i>0.551</i>	<i>0.740</i>	<i>0.752</i>	<i>0.390</i>
# P-G2-022-090FF-ALA-SET-04.763	22	9.0	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	14.00	18.8	19.50	9.96
		<i>0.354</i>	<i>0.188</i>				<i>0.551</i>	<i>0.740</i>	<i>0.768</i>	<i>0.392</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-022-090FH-ALA-SET-06.000	22	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	14.00	18.8	17.50	18.80
		<i>0.354</i>	<i>0.236</i>				<i>0.551</i>	<i>0.740</i>	<i>0.689</i>	<i>0.740</i>
# P-G2-022-090FH-ALA-SET-06.350	22	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	14.00	18.8	17.46	18.80
		<i>0.354</i>	<i>0.250</i>				<i>0.551</i>	<i>0.740</i>	<i>0.687</i>	<i>0.740</i>
P-G2-024-030FF-ALA-SET-06.000	24	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.27	20.1	13.10	11.20
		<i>0.118</i>	<i>0.236</i>				<i>0.601</i>	<i>0.791</i>	<i>0.516</i>	<i>0.441</i>
# P-G2-024-030FF-ALA-SET-06.350	24	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.27	20.7	13.10	11.23
		<i>0.118</i>	<i>0.250</i>				<i>0.601</i>	<i>0.815</i>	<i>0.516</i>	<i>0.442</i>
# P-G2-024-060FF-PFR-NIL-04.763	24	6.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	15.27	19.8	17.46	12.70
		<i>0.236</i>	<i>0.188</i>				<i>0.601</i>	<i>0.780</i>	<i>0.687</i>	<i>0.500</i>
# P-G2-024-060FH-ALA-FLC-06.00	24	6.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	15.27	20.1	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.601</i>	<i>0.791</i>	<i>0.689</i>	<i>0.626</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-024-060FF-PFR-NIL-06.000	24	6.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	15.27	20.0	17.50	13.00
		<i>0.236</i>	<i>0.236</i>				<i>0.601</i>	<i>0.787</i>	<i>0.689</i>	<i>0.512</i>
P-G2-024-060FF-ALA-SET-06.000	24	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.27	20.1	17.40	11.20
		<i>0.236</i>	<i>0.236</i>				<i>0.601</i>	<i>0.791</i>	<i>0.685</i>	<i>0.441</i>
# P-G2-024-060FH-ALA-FLC-06.350	24	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	15.27	20.7	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.601</i>	<i>0.815</i>	<i>0.687</i>	<i>0.625</i>
# P-G2-024-060FF-ALA-SET-06.350	24	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.27	20.7	17.46	11.23
		<i>0.236</i>	<i>0.250</i>				<i>0.601</i>	<i>0.815</i>	<i>0.687</i>	<i>0.442</i>
# P-G2-024-090FF-ALA-SET-06.000	24	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.27	20.1	20.60	11.20
		<i>0.354</i>	<i>0.236</i>				<i>0.601</i>	<i>0.791</i>	<i>0.811</i>	<i>0.441</i>
# P-G2-024-090FF-ALA-SET-06.350	24	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.27	20.7	17.46	11.23
		<i>0.354</i>	<i>0.250</i>				<i>0.601</i>	<i>0.815</i>	<i>0.687</i>	<i>0.442</i>
# P-G2-025-030FF-ALA-SET-06.000	25	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.91	20.7	13.10	11.90
		<i>0.118</i>	<i>0.236</i>				<i>0.626</i>	<i>0.815</i>	<i>0.516</i>	<i>0.469</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-025-030FF-ALA-SET-06.350	25	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.91	20.7	13.10	11.89
		<i>0.118</i>	<i>0.250</i>				<i>0.626</i>	<i>0.815</i>	<i>0.516</i>	<i>0.468</i>
# P-G2-025-060FF-ALA-SET-06.000	25	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.91	20.7	17.40	11.90
		<i>0.236</i>	<i>0.236</i>				<i>0.626</i>	<i>0.815</i>	<i>0.685</i>	<i>0.469</i>
# P-G2-025-060FH-ALA-FLC-06.00	25	6.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	15.91	20.7	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.626</i>	<i>0.815</i>	<i>0.689</i>	<i>0.626</i>
P-G2-025-060FF-ALA-SET-06.350	25	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.91	20.7	17.46	11.89
		<i>0.236</i>	<i>0.250</i>				<i>0.626</i>	<i>0.815</i>	<i>0.687</i>	<i>0.468</i>
# P-G2-025-060FH-ALA-FLC-06.350	25	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	15.91	20.7	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.626</i>	<i>0.815</i>	<i>0.687</i>	<i>0.625</i>
# P-G2-025-090FF-ALA-SET-06.000	25	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.91	20.7	20.60	11.90
		<i>0.354</i>	<i>0.236</i>				<i>0.626</i>	<i>0.815</i>	<i>0.811</i>	<i>0.469</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-025-090FF-ALA-SET-06.350	25	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	15.91	20.7	17.46	11.89
		<i>0.354</i>	<i>0.250</i>				<i>0.626</i>	<i>0.815</i>	<i>0.687</i>	<i>0.468</i>
# P-G2-026-030FF-ALA-SET-06.000	26	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.55	21.3	13.10	12.40
		<i>0.118</i>	<i>0.236</i>				<i>0.652</i>	<i>0.839</i>	<i>0.516</i>	<i>0.488</i>
# P-G2-026-030FF-ALA-SET-06.350	26	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.55	21.3	13.10	12.45
		<i>0.118</i>	<i>0.250</i>				<i>0.652</i>	<i>0.839</i>	<i>0.516</i>	<i>0.490</i>
# P-G2-026-060FF-ALA-SET-06.000	26	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.55	21.3	17.40	12.40
		<i>0.236</i>	<i>0.236</i>				<i>0.652</i>	<i>0.839</i>	<i>0.685</i>	<i>0.488</i>
# P-G2-026-060FF-ALA-SET-06.350	26	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.55	21.3	17.46	12.45
		<i>0.236</i>	<i>0.250</i>				<i>0.652</i>	<i>0.839</i>	<i>0.687</i>	<i>0.490</i>
# P-G2-026-090FF-ALA-SET-06.000	26	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.55	21.3	20.60	12.40
		<i>0.354</i>	<i>0.236</i>				<i>0.652</i>	<i>0.839</i>	<i>0.811</i>	<i>0.488</i>
# P-G2-026-090FF-ALA-SET-06.350	26	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.55	21.3	17.46	12.45
		<i>0.354</i>	<i>0.250</i>				<i>0.652</i>	<i>0.839</i>	<i>0.687</i>	<i>0.490</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-028-030FF-ALA-SET-06.000	28	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.82	22.7	13.10	12.50
		<i>0.118</i>	<i>0.236</i>				<i>0.702</i>	<i>0.894</i>	<i>0.516</i>	<i>0.492</i>
# P-G2-028-030FF-ALA-SET-06.350	28	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.82	22.7	13.10	12.55
		<i>0.118</i>	<i>0.250</i>				<i>0.702</i>	<i>0.894</i>	<i>0.516</i>	<i>0.494</i>
# P-G2-028-060FF-ALA-SET-06.000	28	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.82	22.7	17.40	12.50
		<i>0.236</i>	<i>0.236</i>				<i>0.702</i>	<i>0.894</i>	<i>0.685</i>	<i>0.492</i>
# P-G2-028-060FH-ALA-FLC-06.00	28	6.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	17.82	22.7	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.702</i>	<i>0.894</i>	<i>0.689</i>	<i>0.626</i>
# P-G2-028-060FF-ALA-SET-06.350	28	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.82	22.7	17.46	12.55
		<i>0.236</i>	<i>0.250</i>				<i>0.702</i>	<i>0.894</i>	<i>0.687</i>	<i>0.494</i>
# P-G2-028-060FH-ALA-FLC-06.350	28	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	17.82	22.7	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.702</i>	<i>0.894</i>	<i>0.687</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-028-060FF-PFR-NIL-06.350	28	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	17.82	22.4	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>0.702</i>	<i>0.882</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-028-060FF-PFR-NIL-08.000	28	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	17.82	22.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>0.702</i>	<i>0.866</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-028-090FF-ALA-SET-06.000	28	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.82	22.7	20.60	12.50
		<i>0.354</i>	<i>0.236</i>				<i>0.702</i>	<i>0.894</i>	<i>0.811</i>	<i>0.492</i>
# P-G2-028-090FF-ALA-SET-06.350	28	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.82	22.7	20.64	12.55
		<i>0.354</i>	<i>0.250</i>				<i>0.702</i>	<i>0.894</i>	<i>0.813</i>	<i>0.494</i>
# P-G2-030-030FF-ALA-SET-06.000	30	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	24.0	13.10	13.90
		<i>0.118</i>	<i>0.236</i>				<i>0.752</i>	<i>0.945</i>	<i>0.516</i>	<i>0.547</i>
# P-G2-030-030FF-ALA-SET-06.350	30	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	24.3	13.10	13.87
		<i>0.118</i>	<i>0.250</i>				<i>0.752</i>	<i>0.957</i>	<i>0.516</i>	<i>0.546</i>
# P-G2-030-060FH-ALA-FLC-06.00	30	6.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	19.09	24.0	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.752</i>	<i>0.945</i>	<i>0.689</i>	<i>0.626</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-030-060FF-ALA-SET-06.000	30	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	24.0	17.40	13.90
		<i>0.236</i>	<i>0.236</i>				<i>0.752</i>	<i>0.945</i>	<i>0.685</i>	<i>0.547</i>
# P-G2-030-060FH-ALA-FLC-06.350	30	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	19.09	24.3	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.752</i>	<i>0.957</i>	<i>0.687</i>	<i>0.625</i>
# P-G2-030-060FF-PFR-NIL-06.350	30	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	19.09	23.6	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>0.752</i>	<i>0.929</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-030-060FF-ALA-SET-06.350	30	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	24.3	17.46	13.87
		<i>0.236</i>	<i>0.250</i>				<i>0.752</i>	<i>0.957</i>	<i>0.687</i>	<i>0.546</i>
# P-G2-030-060FF-PFR-NIL-08.000	30	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	19.09	24.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>0.752</i>	<i>0.945</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-030-090FF-ALA-SET-06.000	30	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	24.0	20.60	13.90
		<i>0.354</i>	<i>0.236</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.547</i>
# P-G2-030-090FF-ALA-SET-06.350	30	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	24.3	20.64	13.87
		<i>0.354</i>	<i>0.250</i>				<i>0.752</i>	<i>0.957</i>	<i>0.813</i>	<i>0.546</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-032-030FF-ALA-SET-06.000	32	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.36	25.4	13.10	15.20
		<i>0.118</i>	<i>0.236</i>				<i>0.802</i>	<i>1.000</i>	<i>0.516</i>	<i>0.598</i>
# P-G2-032-030FF-ALA-SET-06.350	32	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.36	25.4	13.10	15.19
		<i>0.118</i>	<i>0.250</i>				<i>0.802</i>	<i>1.000</i>	<i>0.516</i>	<i>0.598</i>
# P-G2-032-060FF-ALA-SET-06.000	32	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.36	25.4	17.40	15.20
		<i>0.236</i>	<i>0.236</i>				<i>0.802</i>	<i>1.000</i>	<i>0.685</i>	<i>0.598</i>
P-G2-032-060FH-ALA-FLC-06.00	32	6.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	20.36	25.4	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.802</i>	<i>1.000</i>	<i>0.689</i>	<i>0.626</i>
# P-G2-032-060FH-ALA-FLC-06.350	32	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	20.36	25.4	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.802</i>	<i>1.000</i>	<i>0.687</i>	<i>0.625</i>
# P-G2-032-060FF-ALA-SET-06.350	32	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.36	25.4	17.46	15.19
		<i>0.236</i>	<i>0.250</i>				<i>0.802</i>	<i>1.000</i>	<i>0.687</i>	<i>0.598</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-032-060FF-PFR-NIL-06.350	32	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	20.36	24.9	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>0.802</i>	<i>0.980</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-032-060FF-PFR-NIL-08.000	32	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	20.36	25.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>0.802</i>	<i>0.984</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-032-090FF-ALA-SET-06.000	32	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.36	25.4	20.60	15.20
		<i>0.354</i>	<i>0.236</i>				<i>0.802</i>	<i>1.000</i>	<i>0.811</i>	<i>0.598</i>
# P-G2-032-090FF-ALA-SET-06.350	32	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.36	25.4	20.64	15.19
		<i>0.354</i>	<i>0.250</i>				<i>0.802</i>	<i>1.000</i>	<i>0.813</i>	<i>0.598</i>
# P-G2-036-030FF-ALA-SET-06.000	36	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.91	28.1	13.10	17.20
		<i>0.118</i>	<i>0.236</i>				<i>0.902</i>	<i>1.106</i>	<i>0.516</i>	<i>0.677</i>
# P-G2-036-030FF-ALA-SET-06.350	36	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.91	28.7	13.10	17.17
		<i>0.118</i>	<i>0.250</i>				<i>0.902</i>	<i>1.130</i>	<i>0.516</i>	<i>0.676</i>
# P-G2-036-060FF-PFR-BIS-04.763	36	6.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	22.91	27.7	17.46	17.46
		<i>0.236</i>	<i>0.188</i>				<i>0.902</i>	<i>1.091</i>	<i>0.687</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-036-060FF-PFR-BIS-05.000	36	6.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	22.91	28.0	17.50	17.50
		<i>0.236</i>	<i>0.197</i>				<i>0.902</i>	<i>1.102</i>	<i>0.689</i>	<i>0.689</i>
P-G2-036-060FF-ALA-FLC-06.00	36	6.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	22.91	28.1	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.902</i>	<i>1.106</i>	<i>0.689</i>	<i>0.626</i>
# P-G2-036-060FF-ALA-SET-06.000	36	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.91	28.1	17.40	17.20
		<i>0.236</i>	<i>0.236</i>				<i>0.902</i>	<i>1.106</i>	<i>0.685</i>	<i>0.677</i>
# P-G2-036-060FF-PFR-BIS-06.000	36	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	22.91	28.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>0.902</i>	<i>1.102</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-036-060FF-PFR-NIL-06.350	36	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	22.91	48.3	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>0.902</i>	<i>1.902</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-036-060FF-ALA-FLC-06.350	36	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	22.91	28.7	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.902</i>	<i>1.130</i>	<i>0.687</i>	<i>0.625</i>
# P-G2-036-060FF-ALA-SET-06.350	36	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.91	28.7	18.26	17.17
		<i>0.236</i>	<i>0.250</i>				<i>0.902</i>	<i>1.130</i>	<i>0.719</i>	<i>0.676</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-036-060FF-PFR-BIS-06.350	36	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	22.91	27.7	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>0.902</i>	<i>1.091</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-036-060FF-PFR-BIS-07.938	36	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	22.91	27.7	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>0.902</i>	<i>1.091</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-036-060FF-PFR-NIL-08.000	36	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	22.91	28.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>0.902</i>	<i>1.102</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-036-060FF-PFR-BIS-08.000	36	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	22.91	28.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>0.902</i>	<i>1.102</i>	<i>0.689</i>	<i>0.689</i>
P-G2-036-090FF-ALA-SET-06.000	36	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.91	28.1	20.60	17.20
		<i>0.354</i>	<i>0.236</i>				<i>0.902</i>	<i>1.106</i>	<i>0.811</i>	<i>0.677</i>
# P-G2-036-090FF-ALA-SET-06.350	36	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.91	28.7	21.43	17.17
		<i>0.354</i>	<i>0.250</i>				<i>0.902</i>	<i>1.130</i>	<i>0.844</i>	<i>0.676</i>
P-G2-040-030FF-ALA-SET-06.000	40	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	30.7	13.50	19.20
		<i>0.118</i>	<i>0.236</i>				<i>1.002</i>	<i>1.209</i>	<i>0.531</i>	<i>0.756</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-040-030FF-ALA-SET-06.350	40	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	30.7	13.49	19.15
		<i>0.118</i>	<i>0.250</i>				<i>1.002</i>	<i>1.209</i>	<i>0.531</i>	<i>0.754</i>
# P-G2-040-060FF-PFR-BIS-04.763	40	6.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	25.45	30.2	17.46	17.46
		<i>0.236</i>	<i>0.188</i>				<i>1.002</i>	<i>1.189</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-040-060FF-PFR-BIS-05.000	40	6.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	25.45	30.0	17.50	17.50
		<i>0.236</i>	<i>0.197</i>				<i>1.002</i>	<i>1.181</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-040-060FF-PFR-BIS-06.000	40	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	25.45	30.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-040-060FF-ALA-SET-06.000	40	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	30.7	18.30	19.20
		<i>0.236</i>	<i>0.236</i>				<i>1.002</i>	<i>1.209</i>	<i>0.720</i>	<i>0.756</i>
# P-G2-040-060FF-ALA-FLC-06.00	40	6.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	25.45	30.7	18.30	15.90
		<i>0.236</i>	<i>0.236</i>				<i>1.002</i>	<i>1.209</i>	<i>0.720</i>	<i>0.626</i>
P-G2-040-060FF-ALA-SET-06.350	40	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	30.7	18.26	19.15
		<i>0.236</i>	<i>0.250</i>				<i>1.002</i>	<i>1.209</i>	<i>0.719</i>	<i>0.754</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-040-060FF-ALA-FLC-06.350	40	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	25.45	30.7	18.26	15.88
		<i>0.236</i>	<i>0.250</i>				<i>1.002</i>	<i>1.209</i>	<i>0.719</i>	<i>0.625</i>
P-G2-040-060FF-PFR-NIL-06.350	40	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	25.45	30.2	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-040-060FF-PFR-BIS-06.350	40	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	25.45	30.2	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-040-060FF-PFR-BIS-07.938	40	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	25.45	30.2	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.002</i>	<i>1.189</i>	<i>0.687</i>	<i>0.687</i>
P-G2-040-060FF-PFR-BIS-08.000	40	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	25.45	30.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.002</i>	<i>1.181</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-040-060FF-PFR-NIL-08.000	40	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	25.45	30.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.002</i>	<i>1.181</i>	<i>0.689</i>	<i>0.689</i>
P-G2-040-090FF-ALA-SET-06.000	40	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	30.7	21.40	19.20
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.209</i>	<i>0.843</i>	<i>0.756</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-040-090FF-ALA-SET-06.350	40	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	30.7	21.43	19.15
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.209</i>	<i>0.844</i>	<i>0.754</i>
P-G2-042-030FF-ALA-SET-06.000	42	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	26.73	32.0	13.50	20.50
		<i>0.118</i>	<i>0.236</i>				<i>1.052</i>	<i>1.260</i>	<i>0.531</i>	<i>0.807</i>
# P-G2-042-030FF-ALA-SET-06.350	42	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	26.73	32.4	13.49	20.47
		<i>0.118</i>	<i>0.250</i>				<i>1.052</i>	<i>1.276</i>	<i>0.531</i>	<i>0.806</i>
P-G2-042-060FF-PFR-BIS-04.763	42	6.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	26.73	31.5	17.46	17.46
		<i>0.236</i>	<i>0.188</i>				<i>1.052</i>	<i>1.240</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-042-060FF-PFR-BIS-05.000	42	6.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	26.73	31.0	17.50	17.50
		<i>0.236</i>	<i>0.197</i>				<i>1.052</i>	<i>1.220</i>	<i>0.689</i>	<i>0.689</i>
P-G2-042-060FF-ALA-SET-06.000	42	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	26.73	32.0	18.30	20.50
		<i>0.236</i>	<i>0.236</i>				<i>1.052</i>	<i>1.260</i>	<i>0.720</i>	<i>0.807</i>
P-G2-042-060FF-PFR-BIS-06.000	42	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	26.73	31.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>1.052</i>	<i>1.220</i>	<i>0.689</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-042-060FF-PFR-BIS-06.350	42	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	26.73	31.5	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.052</i>	<i>1.240</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-042-060FF-PFR-NIL-06.350	42	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	26.73	31.5	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.052</i>	<i>1.240</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-042-060FF-ALA-SET-06.350	42	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	26.73	32.4	18.26	20.47
		<i>0.236</i>	<i>0.250</i>				<i>1.052</i>	<i>1.276</i>	<i>0.719</i>	<i>0.806</i>
# P-G2-042-060FF-PFR-BIS-07.938	42	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	26.73	31.5	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.052</i>	<i>1.240</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-042-060FF-PFR-BIS-08.000	42	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	26.73	31.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.052</i>	<i>1.220</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-042-060FF-PFR-NIL-08.000	42	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	26.73	31.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.052</i>	<i>1.220</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-042-090FF-ALA-SET-06.000	42	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	26.73	32.0	21.40	20.50
		<i>0.354</i>	<i>0.236</i>				<i>1.052</i>	<i>1.260</i>	<i>0.843</i>	<i>0.807</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-042-090FF-ALA-SET-06.350	42	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	26.73	32.4	21.43	20.47
		<i>0.354</i>	<i>0.250</i>				<i>1.052</i>	<i>1.276</i>	<i>0.844</i>	<i>0.806</i>
# P-G2-044-030FF-ALA-SET-06.000	44	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.00	33.4	13.50	21.80
		<i>0.118</i>	<i>0.236</i>				<i>1.102</i>	<i>1.315</i>	<i>0.531</i>	<i>0.858</i>
# P-G2-044-030FF-ALA-SET-06.350	44	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.00	33.4	13.49	21.79
		<i>0.118</i>	<i>0.250</i>				<i>1.102</i>	<i>1.315</i>	<i>0.531</i>	<i>0.858</i>
# P-G2-044-060FF-PFR-BIS-04.763	44	6.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	28.00	32.8	17.46	17.46
		<i>0.236</i>	<i>0.188</i>				<i>1.102</i>	<i>1.291</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-044-060FF-PFR-BIS-05.000	44	6.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	28.00	33.0	17.50	17.50
		<i>0.236</i>	<i>0.197</i>				<i>1.102</i>	<i>1.299</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-044-060FF-PFR-BIS-06.000	44	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	28.00	33.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>1.102</i>	<i>1.299</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-044-060FF-ALA-SET-06.000	44	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.00	33.4	18.30	21.80
		<i>0.236</i>	<i>0.236</i>				<i>1.102</i>	<i>1.315</i>	<i>0.720</i>	<i>0.858</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-044-060FF-PFR-BIS-06.350	44	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	28.00	32.8	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.102</i>	<i>1.291</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-044-060FF-PFR-NIL-06.350	44	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	28.00	32.8	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.102</i>	<i>1.291</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-044-060FF-ALA-SET-06.350	44	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.00	33.4	18.26	21.79
		<i>0.236</i>	<i>0.250</i>				<i>1.102</i>	<i>1.315</i>	<i>0.719</i>	<i>0.858</i>
# P-G2-044-060FF-PFR-BIS-07.938	44	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	28.00	32.8	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.102</i>	<i>1.291</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-044-060FF-PFR-BIS-08.000	44	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	28.00	33.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.102</i>	<i>1.299</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-044-060FF-PFR-NIL-08.000	44	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	28.00	33.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.102</i>	<i>1.299</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-044-090FF-ALA-SET-06.000	44	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.00	33.4	21.40	21.80
		<i>0.354</i>	<i>0.236</i>				<i>1.102</i>	<i>1.315</i>	<i>0.843</i>	<i>0.858</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-044-090FF-ALA-SET-06.350	44	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.00	33.4	21.43	21.79
		<i>0.354</i>	<i>0.250</i>				<i>1.102</i>	<i>1.315</i>	<i>0.844</i>	<i>0.858</i>
P-G2-045-030FF-ALA-SET-06.000	45	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	34.0	13.50	22.90
		<i>0.118</i>	<i>0.236</i>				<i>1.128</i>	<i>1.339</i>	<i>0.531</i>	<i>0.902</i>
# P-G2-045-030FF-ALA-SET-06.350	45	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	34.4	13.49	22.86
		<i>0.118</i>	<i>0.250</i>				<i>1.128</i>	<i>1.354</i>	<i>0.531</i>	<i>0.900</i>
# P-G2-045-060FF-ALA-FLC-06.00	45	6.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	28.64	34.0	18.30	15.90
		<i>0.236</i>	<i>0.236</i>				<i>1.128</i>	<i>1.339</i>	<i>0.720</i>	<i>0.626</i>
P-G2-045-060FF-ALA-SET-06.000	45	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	34.0	18.30	22.90
		<i>0.236</i>	<i>0.236</i>				<i>1.128</i>	<i>1.339</i>	<i>0.720</i>	<i>0.902</i>
# P-G2-045-060FF-ALA-FLC-06.350	45	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	28.64	34.4	18.26	15.88
		<i>0.236</i>	<i>0.250</i>				<i>1.128</i>	<i>1.354</i>	<i>0.719</i>	<i>0.625</i>
P-G2-045-060FF-ALA-SET-06.350	45	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	34.4	18.26	22.86
		<i>0.236</i>	<i>0.250</i>				<i>1.128</i>	<i>1.354</i>	<i>0.719</i>	<i>0.900</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-045-090FF-ALA-SET-06.000	45	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	34.0	21.40	22.90
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.339</i>	<i>0.843</i>	<i>0.902</i>
# P-G2-045-090FF-ALA-SET-06.350	45	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	34.4	21.43	22.86
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.354</i>	<i>0.844</i>	<i>0.900</i>
# P-G2-048-030FF-ALA-SET-06.000	48	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.55	36.1	13.50	23.80
		<i>0.118</i>	<i>0.236</i>				<i>1.203</i>	<i>1.421</i>	<i>0.531</i>	<i>0.937</i>
# P-G2-048-030FF-ALA-SET-06.350	48	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.55	36.7	13.49	23.77
		<i>0.118</i>	<i>0.250</i>				<i>1.203</i>	<i>1.445</i>	<i>0.531</i>	<i>0.936</i>
P-G2-048-060FF-PFR-BIS-04.763	48	6.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.55	35.4	17.46	17.46
		<i>0.236</i>	<i>0.188</i>				<i>1.203</i>	<i>1.394</i>	<i>0.687</i>	<i>0.687</i>
P-G2-048-060FF-PFR-BIS-05.000	48	6.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	30.55	35.0	17.50	17.50
		<i>0.236</i>	<i>0.197</i>				<i>1.203</i>	<i>1.378</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-048-060FF-PFR-BIS-06.000	48	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	30.55	35.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>1.203</i>	<i>1.378</i>	<i>0.689</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-048-060FF-ALA-FLC-06.00	48	6.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	30.55	36.1	18.30	15.90
		<i>0.236</i>	<i>0.236</i>				<i>1.203</i>	<i>1.421</i>	<i>0.720</i>	<i>0.626</i>
# P-G2-048-060FF-ALA-SET-06.000	48	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.55	36.1	18.30	23.80
		<i>0.236</i>	<i>0.236</i>				<i>1.203</i>	<i>1.421</i>	<i>0.720</i>	<i>0.937</i>
# P-G2-048-060FF-PFR-NIL-06.350	48	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	30.55	35.4	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.203</i>	<i>1.394</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-048-060FF-PFR-BIS-06.350	48	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.55	35.4	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.203</i>	<i>1.394</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-048-060FF-ALA-FLC-06.350	48	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	30.55	36.7	18.26	15.88
		<i>0.236</i>	<i>0.250</i>				<i>1.203</i>	<i>1.445</i>	<i>0.719</i>	<i>0.625</i>
P-G2-048-060FF-ALA-SET-06.350	48	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.55	36.7	18.26	23.77
		<i>0.236</i>	<i>0.250</i>				<i>1.203</i>	<i>1.445</i>	<i>0.719</i>	<i>0.936</i>
# P-G2-048-060FF-PFR-BIS-07.938	48	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.55	35.4	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.203</i>	<i>1.394</i>	<i>0.687</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-048-060FF-PFR-BIS-08.000	48	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	30.55	35.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.203</i>	<i>1.378</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-048-060FF-PFR-NIL-08.000	48	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	30.55	35.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.203</i>	<i>1.378</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-048-090FF-ALA-SET-06.000	48	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.55	36.1	21.40	23.80
		<i>0.354</i>	<i>0.236</i>				<i>1.203</i>	<i>1.421</i>	<i>0.843</i>	<i>0.937</i>
# P-G2-048-090FF-ALA-SET-06.350	48	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.55	36.7	21.43	23.77
		<i>0.354</i>	<i>0.250</i>				<i>1.203</i>	<i>1.445</i>	<i>0.844</i>	<i>0.936</i>
# P-G2-050-030FF-ALA-SET-06.000	50	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	37.3	13.50	23.80
		<i>0.118</i>	<i>0.236</i>				<i>1.253</i>	<i>1.469</i>	<i>0.531</i>	<i>0.937</i>
# P-G2-050-030FF-ALA-SET-06.350	50	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	37.3	13.49	23.77
		<i>0.118</i>	<i>0.250</i>				<i>1.253</i>	<i>1.469</i>	<i>0.531</i>	<i>0.936</i>
# P-G2-050-060FF-ALA-FLC-06.00	50	6.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	31.82	37.3	18.30	15.90
		<i>0.236</i>	<i>0.236</i>				<i>1.253</i>	<i>1.469</i>	<i>0.720</i>	<i>0.626</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G2-050-060FF-ALA-SET-06.000	50	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	37.3	18.30	23.80
		<i>0.236</i>	<i>0.236</i>				<i>1.253</i>	<i>1.469</i>	<i>0.720</i>	<i>0.937</i>
# P-G2-050-060FF-ALA-FLC-06.350	50	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	31.82	37.3	18.26	15.88
		<i>0.236</i>	<i>0.250</i>				<i>1.253</i>	<i>1.469</i>	<i>0.719</i>	<i>0.625</i>
# P-G2-050-060FF-ALA-SET-06.350	50	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	37.3	18.26	23.77
		<i>0.236</i>	<i>0.250</i>				<i>1.253</i>	<i>1.469</i>	<i>0.719</i>	<i>0.936</i>
P-G2-050-090FF-ALA-SET-06.000	50	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	37.3	21.40	23.80
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.469</i>	<i>0.843</i>	<i>0.937</i>
# P-G2-050-090FF-ALA-SET-06.350	50	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	37.3	21.43	23.77
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.469</i>	<i>0.844</i>	<i>0.936</i>
P-G2-056-030FF-ALA-SET-06.000	56	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.64	40.0	13.50	26.20
		<i>0.118</i>	<i>0.236</i>				<i>1.403</i>	<i>1.575</i>	<i>0.531</i>	<i>1.031</i>
# P-G2-056-030FF-ALA-SET-06.350	56	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.64	40.5	13.49	26.16
		<i>0.118</i>	<i>0.250</i>				<i>1.403</i>	<i>1.594</i>	<i>0.531</i>	<i>1.030</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-056-060FF-ALA-SET-06.000	56	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.64	40.0	18.30	26.20
		<i>0.236</i>	<i>0.236</i>				<i>1.403</i>	<i>1.575</i>	<i>0.720</i>	<i>1.031</i>
# P-G2-056-060FF-ALA-SET-06.350	56	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.64	40.5	18.26	26.16
		<i>0.236</i>	<i>0.250</i>				<i>1.403</i>	<i>1.594</i>	<i>0.719</i>	<i>1.030</i>
# P-G2-056-090FF-ALA-SET-06.000	56	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.64	40.0	21.40	26.20
		<i>0.354</i>	<i>0.236</i>				<i>1.403</i>	<i>1.575</i>	<i>0.843</i>	<i>1.031</i>
# P-G2-056-090FF-ALA-SET-06.350	56	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.64	40.5	21.43	26.16
		<i>0.354</i>	<i>0.250</i>				<i>1.403</i>	<i>1.594</i>	<i>0.844</i>	<i>1.030</i>
# P-G2-060-030FF-ALA-SET-06.000	60	3.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	43.9	13.50	31.00
		<i>0.118</i>	<i>0.236</i>				<i>1.503</i>	<i>1.728</i>	<i>0.531</i>	<i>1.220</i>
# P-G2-060-030FF-ALA-SET-06.350	60	3.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	43.9	13.49	31.39
		<i>0.118</i>	<i>0.250</i>				<i>1.503</i>	<i>1.728</i>	<i>0.531</i>	<i>1.236</i>
# P-G2-060-060FF-ALA-FLC-06.00	60	6.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	38.18	43.9	18.30	15.90
		<i>0.236</i>	<i>0.236</i>				<i>1.503</i>	<i>1.728</i>	<i>0.720</i>	<i>0.626</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-060-060P-ALA-SET-06.000	60	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		19.10	29.20
		<i>0.236</i>	<i>0.236</i>				<i>1.503</i>		<i>0.752</i>	<i>1.150</i>
P-G2-060-060FF-ALA-SET-06.000	60	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	43.9	18.30	31.00
		<i>0.236</i>	<i>0.236</i>				<i>1.503</i>	<i>1.728</i>	<i>0.720</i>	<i>1.220</i>
# P-G2-060-060P-ALA-FLC-06.00	60	6.0	6.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	38.18	-	19.10	19.10
		<i>0.236</i>	<i>0.236</i>				<i>1.503</i>		<i>0.752</i>	<i>0.752</i>
# P-G2-060-060FF-PFR-BIS-06.000	60	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	38.18	43.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>1.503</i>	<i>1.693</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-060-060FF-PFR-NIL-06.350	60	6.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	38.18	43.2	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.503</i>	<i>1.701</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-060-060P-ALA-FLC-06.350	60	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	38.18		19.50	19.50
		<i>0.236</i>	<i>0.250</i>				<i>1.503</i>		<i>0.768</i>	<i>0.768</i>
# P-G2-060-060P-ALA-SET-06.350	60	6.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		19.50	29.16
		<i>0.236</i>	<i>0.250</i>				<i>1.503</i>		<i>0.768</i>	<i>1.148</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-060-060FF-PFR-BIS-06.350	60	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	38.18	43.2	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.503</i>	<i>1.701</i>	<i>0.687</i>	<i>0.687</i>
P-G2-060-060FF-ALA-SET-06.350	60	6.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	43.9	19.50	31.39
		<i>0.236</i>	<i>0.250</i>				<i>1.503</i>	<i>1.728</i>	<i>0.768</i>	<i>1.236</i>
# P-G2-060-060FF-ALA-FLC-06.350	60	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	38.18	43.9	18.26	15.88
		<i>0.236</i>	<i>0.250</i>				<i>1.503</i>	<i>1.728</i>	<i>0.719</i>	<i>0.625</i>
# P-G2-060-060FF-PFR-BIS-07.938	60	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	38.18	43.2	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.503</i>	<i>1.701</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-060-060FF-PFR-NIL-08.000	60	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	38.18	43.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.503</i>	<i>1.693</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-060-060FF-PFR-BIS-08.000	60	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	38.18	43.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.503</i>	<i>1.693</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-060-090FF-ALA-SET-06.000	60	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	43.9	21.40	31.00
		<i>0.354</i>	<i>0.236</i>				<i>1.503</i>	<i>1.728</i>	<i>0.843</i>	<i>1.220</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-060-090P-ALA-SET-06.000	60	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		22.20	29.20
		<i>0.354</i>	<i>0.236</i>				<i>1.503</i>		<i>0.874</i>	<i>1.150</i>
# P-G2-060-090FF-ALA-SET-06.350	60	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	43.9	22.23	31.39
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>	<i>1.728</i>	<i>0.875</i>	<i>1.236</i>
# P-G2-060-090P-ALA-SET-06.350	60	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		22.23	29.16
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>		<i>0.875</i>	<i>1.148</i>
# P-G2-062-060P-ALA-SET-06.000	62	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	39.45		19.10	29.20
		<i>0.236</i>	<i>0.236</i>				<i>1.553</i>		<i>0.752</i>	<i>1.150</i>
# P-G2-062-060P-ALA-SET-06.350	62	6.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	39.45		19.50	29.16
		<i>0.236</i>	<i>0.250</i>				<i>1.553</i>		<i>0.768</i>	<i>1.148</i>
# P-G2-062-090P-ALA-SET-06.000	62	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	39.45		22.20	29.20
		<i>0.354</i>	<i>0.236</i>				<i>1.553</i>		<i>0.874</i>	<i>1.150</i>
# P-G2-062-090P-ALA-SET-06.350	62	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	39.45		22.23	29.16
		<i>0.354</i>	<i>0.250</i>				<i>1.553</i>		<i>0.875</i>	<i>1.148</i>
# P-G2-065-060FF-PFR-BIS-06.000	65	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	41.36	46.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>1.628</i>	<i>1.811</i>	<i>0.689</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-065-060FF-PFR-BIS-06.350	65	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	41.36	46.2	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.628</i>	<i>1.819</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-065-060FF-PFR-BIS-07.938	65	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	41.36	46.2	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.628</i>	<i>1.819</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-065-060FF-PFR-NIL-07.938	65	6.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	41.36	46.2	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.628</i>	<i>1.819</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-065-060FF-PFR-BIS-08.000	65	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	41.36	46.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.628</i>	<i>1.811</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-065-060FF-PFR-NIL-08.000	65	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	41.36	46.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.628</i>	<i>1.811</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-068-060P-ALA-SET-06.000	68	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	43.27		19.10	30.40
		<i>0.236</i>	<i>0.236</i>				<i>1.704</i>		<i>0.752</i>	<i>1.197</i>
# P-G2-068-060P-ALA-SET-06.350	68	6.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	43.27		19.50	30.35
		<i>0.236</i>	<i>0.250</i>				<i>1.704</i>		<i>0.768</i>	<i>1.195</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-068-090P-ALA-SET-06.000	68	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	43.27		22.20	30.40
		<i>0.354</i>	<i>0.236</i>				<i>1.704</i>		<i>0.874</i>	<i>1.197</i>
# P-G2-068-090P-ALA-SET-06.350	68	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	43.27		22.23	30.35
		<i>0.354</i>	<i>0.250</i>				<i>1.704</i>		<i>0.875</i>	<i>1.195</i>
# P-G2-072-060P-ALA-FLC-06.00	72	6.0	6.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	45.82	-	19.10	19.10
		<i>0.236</i>	<i>0.236</i>				<i>1.804</i>		<i>0.752</i>	<i>0.752</i>
# P-G2-072-060P-ALA-SET-06.000	72	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.82		19.10	30.40
		<i>0.236</i>	<i>0.236</i>				<i>1.804</i>		<i>0.752</i>	<i>1.197</i>
P-G2-072-060FF-PFR-BIS-06.000	72	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	45.82	51.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>1.804</i>	<i>2.008</i>	<i>0.689</i>	<i>0.689</i>
P-G2-072-060FF-PFR-BIS-06.350	72	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.82	50.8	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>1.804</i>	<i>2.000</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-072-060P-ALA-FLC-06.350	72	6.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	45.82		19.50	19.50
		<i>0.236</i>	<i>0.250</i>				<i>1.804</i>		<i>0.768</i>	<i>0.768</i>
# P-G2-072-060P-ALA-SET-06.350	72	6.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.82		19.50	30.35
		<i>0.236</i>	<i>0.250</i>				<i>1.804</i>		<i>0.768</i>	<i>1.195</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-072-060FF-PFR-NIL-07.938	72	6.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	45.82	50.8	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.804</i>	<i>2.000</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-072-060FF-PFR-BIS-07.938	72	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.82	50.8	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>1.804</i>	<i>2.000</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-072-060FF-PFR-BIS-08.000	72	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	45.82	51.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.804</i>	<i>2.008</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-072-060FF-PFR-NIL-08.000	72	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	45.82	51.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>1.804</i>	<i>2.008</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-072-090P-ALA-SET-06.000	72	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.82		22.20	30.40
		<i>0.354</i>	<i>0.236</i>				<i>1.804</i>		<i>0.874</i>	<i>1.197</i>
# P-G2-072-090P-ALA-SET-06.350	72	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.82		22.23	30.35
		<i>0.354</i>	<i>0.250</i>				<i>1.804</i>		<i>0.875</i>	<i>1.195</i>
# P-G2-074-060P-ALA-SET-06.350	74	6.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.09		19.50	30.86
		<i>0.236</i>	<i>0.250</i>				<i>1.854</i>		<i>0.768</i>	<i>1.215</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-074-060P-ALA-SET-08.000	74	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.09		19.10	30.90
		<i>0.236</i>	<i>0.315</i>				<i>1.854</i>		<i>0.752</i>	<i>1.217</i>
# P-G2-074-090P-ALA-SET-06.350	74	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.09		22.23	30.86
		<i>0.354</i>	<i>0.250</i>				<i>1.854</i>		<i>0.875</i>	<i>1.215</i>
# P-G2-074-090P-ALA-SET-08.000	74	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.09		22.20	30.90
		<i>0.354</i>	<i>0.315</i>				<i>1.854</i>		<i>0.874</i>	<i>1.217</i>
# P-G2-075-090P-ALA-SET-06.350	75	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.73		22.23	30.86
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>		<i>0.875</i>	<i>1.215</i>
# P-G2-080-060FF-PFR-BIS-06.000	80	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	50.91	56.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>2.004</i>	<i>2.205</i>	<i>0.689</i>	<i>0.689</i>
P-G2-080-060FF-PFR-BIS-06.350	80	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	50.91	56.1	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>2.004</i>	<i>2.209</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-080-060P-ALA-FLC-07.938	80	6.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	50.91		19.50	25.40
		<i>0.236</i>	<i>0.313</i>				<i>2.004</i>		<i>0.768</i>	<i>1.000</i>
# P-G2-080-060FF-PFR-BIS-07.938	80	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	50.91	56.1	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>2.004</i>	<i>2.209</i>	<i>0.687</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-080-060FF-PFR-NIL-07.938	80	6.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	50.91	56.1	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>2.004</i>	<i>2.209</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-080-060P-ALA-SET-07.938	80	6.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	50.91		19.50	38.10
		<i>0.236</i>	<i>0.313</i>				<i>2.004</i>		<i>0.768</i>	<i>1.500</i>
# P-G2-080-060P-ALA-SET-08.000	80	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	50.91		19.10	38.10
		<i>0.236</i>	<i>0.315</i>				<i>2.004</i>		<i>0.752</i>	<i>1.500</i>
# P-G2-080-060FF-PFR-NIL-08.000	80	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	50.91	56.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>2.004</i>	<i>2.205</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-080-060FF-PFR-BIS-08.000	80	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	50.91	56.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>2.004</i>	<i>2.205</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-080-060P-ALA-FLC-08.00	80	6.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	50.91	-	19.10	25.40
		<i>0.236</i>	<i>0.315</i>				<i>2.004</i>		<i>0.752</i>	<i>1.000</i>
# P-G2-080-090P-ALA-SET-07.938	80	9.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	50.91		22.23	38.10
		<i>0.354</i>	<i>0.313</i>				<i>2.004</i>		<i>0.875</i>	<i>1.500</i>
P-G2-080-090P-ALA-SET-08.000	80	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	50.91		22.20	38.10
		<i>0.354</i>	<i>0.315</i>				<i>2.004</i>		<i>0.874</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-090-060FF-PFR-BIS-06.000	90	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	57.27	63.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>2.255</i>	<i>2.480</i>	<i>0.689</i>	<i>0.689</i>
P-G2-090-060FF-PFR-BIS-06.350	90	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	57.27	62.5	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>2.255</i>	<i>2.461</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-090-060P-ALA-FLC-07.938	90	6.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	57.27		19.50	25.40
		<i>0.236</i>	<i>0.313</i>				<i>2.255</i>		<i>0.768</i>	<i>1.000</i>
# P-G2-090-060P-ALA-SET-07.938	90	6.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		19.50	38.10
		<i>0.236</i>	<i>0.313</i>				<i>2.255</i>		<i>0.768</i>	<i>1.500</i>
# P-G2-090-060FF-PFR-NIL-07.938	90	6.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	57.27	62.5	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>2.255</i>	<i>2.461</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-090-060FF-PFR-BIS-07.938	90	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	57.27	62.5	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>2.255</i>	<i>2.461</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-090-060FF-PFR-NIL-08.000	90	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	57.27	63.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>2.255</i>	<i>2.480</i>	<i>0.689</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-090-060FF-PFR-BIS-08.000	90	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	57.27	63.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>2.255</i>	<i>2.480</i>	<i>0.689</i>	<i>0.689</i>
P-G2-090-060P-ALA-SET-08.000	90	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		19.10	38.10
		<i>0.236</i>	<i>0.315</i>				<i>2.255</i>		<i>0.752</i>	<i>1.500</i>
# P-G2-090-060P-ALA-FLC-08.00	90	6.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	57.27	-	19.10	25.40
		<i>0.236</i>	<i>0.315</i>				<i>2.255</i>		<i>0.752</i>	<i>1.000</i>
# P-G2-090-090P-ALA-SET-07.938	90	9.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		22.23	38.10
		<i>0.354</i>	<i>0.313</i>				<i>2.255</i>		<i>0.875</i>	<i>1.500</i>
# P-G2-090-090P-ALA-SET-08.000	90	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		22.20	38.10
		<i>0.354</i>	<i>0.315</i>				<i>2.255</i>		<i>0.874</i>	<i>1.500</i>
P-G2-100-060FF-PFR-BIS-06.000	100	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	63.64	69.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>2.506</i>	<i>2.717</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-100-060FF-PFR-BIS-06.350	100	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.64	68.8	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>2.506</i>	<i>2.709</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-100-060P-ALA-SET-07.938	100	6.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	63.64		19.50	38.10
		<i>0.236</i>	<i>0.313</i>				<i>2.506</i>		<i>0.768</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-100-060P-ALA-FLC-07.938	100	6.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	63.64		19.50	25.40
		<i>0.236</i>	<i>0.313</i>				<i>2.506</i>		<i>0.768</i>	<i>1.000</i>
# P-G2-100-060FF-PFR-BIS-07.938	100	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.64	68.8	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-100-060FF-PFR-NIL-07.938	100	6.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	63.64	68.8	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-100-060P-ALA-SET-08.000	100	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	63.64		19.10	38.10
		<i>0.236</i>	<i>0.315</i>				<i>2.506</i>		<i>0.752</i>	<i>1.500</i>
# P-G2-100-060FF-PFR-NIL-08.000	100	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	63.64	69.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.689</i>	<i>0.689</i>
P-G2-100-060FF-PFR-BIS-08.000	100	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	63.64	69.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-100-060P-ALA-FLC-08.00	100	6.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	63.64	-	19.10	25.40
		<i>0.236</i>	<i>0.315</i>				<i>2.506</i>		<i>0.752</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-100-090P-ALA-SET-07.938	100	9.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	63.64		22.23	38.10
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>		<i>0.875</i>	<i>1.500</i>
# P-G2-100-090P-ALA-SET-08.000	100	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	63.64		22.20	38.10
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>		<i>0.874</i>	<i>1.500</i>
# P-G2-110-060FF-PFR-BIS-06.000	110	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	70.00	75.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>2.756</i>	<i>2.953</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-110-060FF-PFR-BIS-06.350	110	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	70.00	75.4	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>2.756</i>	<i>2.969</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-110-060FF-PFR-BIS-07.938	110	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	70.00	75.4	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>2.756</i>	<i>2.969</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-110-060FF-PFR-NIL-07.938	110	6.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	70.00	75.4	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>2.756</i>	<i>2.969</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-110-060FF-PFR-BIS-08.000	110	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	70.00	75.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>2.756</i>	<i>2.953</i>	<i>0.689</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-110-060FF-PFR-NIL-08.000	110	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	70.00	75.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>2.756</i>	<i>2.953</i>	<i>0.689</i>	<i>0.689</i>
P-G2-120-060FF-PFR-BIS-06.000	120	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	76.36	82.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>3.006</i>	<i>3.228</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-120-060FF-PFR-BIS-06.350	120	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	76.36	81.8	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>3.006</i>	<i>3.220</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-120-060FF-PFR-BIS-07.938	120	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	76.36	81.8	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>3.006</i>	<i>3.220</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-120-060FF-PFR-NIL-07.938	120	6.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	76.36	81.8	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>3.006</i>	<i>3.220</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-120-060FF-PFR-NIL-08.000	120	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	76.36	82.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>3.006</i>	<i>3.228</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-120-060FF-PFR-BIS-08.000	120	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	76.36	82.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>3.006</i>	<i>3.228</i>	<i>0.689</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-120-060P-ALA-FLC-09.525	120	6.0	9.525	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	76.36		19.50	25.40
		<i>0.236</i>	<i>0.375</i>				<i>3.006</i>		<i>0.768</i>	<i>1.000</i>
P-G2-120-060P-ALA-SET-09.525	120	6.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	76.36		19.50	38.10
		<i>0.236</i>	<i>0.375</i>				<i>3.006</i>		<i>0.768</i>	<i>1.500</i>
# P-G2-120-060P-ALA-FLC-10.00	120	6.0	10.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	76.36	-	19.10	25.40
		<i>0.236</i>	<i>0.394</i>				<i>3.006</i>		<i>0.752</i>	<i>1.000</i>
# P-G2-120-060P-ALA-SET-10.000	120	6.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	76.36		19.10	38.10
		<i>0.236</i>	<i>0.394</i>				<i>3.006</i>		<i>0.752</i>	<i>1.500</i>
# P-G2-120-090P-ALA-SET-09.525	120	9.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	76.36		22.23	38.10
		<i>0.354</i>	<i>0.375</i>				<i>3.006</i>		<i>0.875</i>	<i>1.500</i>
# P-G2-120-090P-ALA-SET-10.000	120	9.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	76.36		22.20	38.10
		<i>0.354</i>	<i>0.394</i>				<i>3.006</i>		<i>0.874</i>	<i>1.500</i>
# P-G2-130-060FF-PFR-BIS-06.000	130	6.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	82.73	88.0	17.50	17.50
		<i>0.236</i>	<i>0.236</i>				<i>3.257</i>	<i>3.465</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-130-060FF-PFR-BIS-06.350	130	6.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	82.73	88.4	17.46	17.46
		<i>0.236</i>	<i>0.250</i>				<i>3.257</i>	<i>3.480</i>	<i>0.687</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 2.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G2-130-060FF-PFR-BIS-07.938	130	6.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	82.73	88.4	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>3.257</i>	<i>3.480</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-130-060FF-PFR-NIL-07.938	130	6.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	82.73	88.4	17.46	17.46
		<i>0.236</i>	<i>0.313</i>				<i>3.257</i>	<i>3.480</i>	<i>0.687</i>	<i>0.687</i>
# P-G2-130-060FF-PFR-NIL-08.000	130	6.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	82.73	88.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>3.257</i>	<i>3.465</i>	<i>0.689</i>	<i>0.689</i>
# P-G2-130-060FF-PFR-BIS-08.000	130	6.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Brass Insert	FF_GI_HW (Double Flange)	82.73	88.0	17.50	17.50
		<i>0.236</i>	<i>0.315</i>				<i>3.257</i>	<i>3.465</i>	<i>0.689</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au

