




# MBA

## Pulleys - Timing - 2.500mm Pitch - T2.5

Timing Pulleys to suit T Series 2.500mm Pitch Timing Belts.

Various materials as shown.

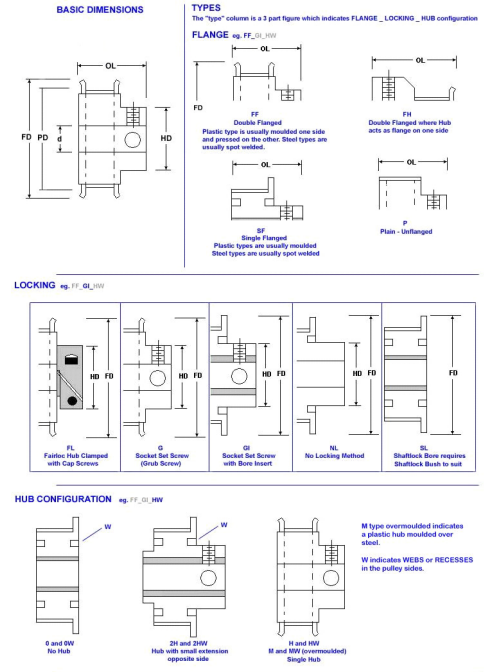

### Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)                | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|-----------------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                                   | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| P-T2.5-012-060FH-ALU-SET-03.00   | 12          | 6.0                | 3.000         | Aluminium      | Set Screw         | FH_G_H<br>(Double Flange FH Type) | 9.55                   | 13.0                    | 16.00                  | 13.00                |
|                                  |             | <i>0.236</i>       | <i>0.118</i>  |                |                   |                                   | <i>0.376</i>           | <i>0.512</i>            | <i>0.630</i>           | <i>0.512</i>         |
| # P-T2.5-012-060SF-ACE-NIL-03.50 | 12          | 6.0                | 3.500         | Acetal - Black | No Locking Device | SF_NL_2HW<br>(Single Flange)      | 9.55                   | 10.6                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                   | <i>0.376</i>           | <i>0.417</i>            | <i>0.551</i>           | <i>0.354</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)             | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|--------------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                                | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| P-T2.5-012-060FF-ACE-NIL-03.50   | 12          | 6.0                | 3.500         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)       | 9.55                   | 10.6                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                | <i>0.376</i>           | <i>0.417</i>            | <i>0.551</i>           | <i>0.354</i>         |
| # P-T2.5-013-060FF-ACE-NIL-03.50 | 13          | 6.0                | 3.500         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)       | 10.34                  | 11.4                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                | <i>0.407</i>           | <i>0.449</i>            | <i>0.551</i>           | <i>0.354</i>         |
| # P-T2.5-013-060SF-ACE-NIL-03.50 | 13          | 6.0                | 3.500         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange)      | 10.34                  | 11.4                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                | <i>0.407</i>           | <i>0.449</i>            | <i>0.551</i>           | <i>0.354</i>         |
| P-T2.5-014-060FH-ALU-SET-03.00   | 14          | 6.0                | 3.000         | Aluminium      | Set Screw         | FH_G_H (Double Flange FH Type) | 11.14                  | 15.0                    | 16.00                  | 15.00                |
|                                  |             | <i>0.236</i>       | <i>0.118</i>  |                |                   |                                | <i>0.439</i>           | <i>0.591</i>            | <i>0.630</i>           | <i>0.591</i>         |
| # P-T2.5-014-060FF-ACE-NIL-03.50 | 14          | 6.0                | 3.500         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)       | 11.14                  | 12.2                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                | <i>0.439</i>           | <i>0.480</i>            | <i>0.551</i>           | <i>0.354</i>         |
| # P-T2.5-014-060SF-ACE-NIL-03.50 | 14          | 6.0                | 3.500         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange)      | 11.14                  | 12.2                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                | <i>0.439</i>           | <i>0.480</i>            | <i>0.551</i>           | <i>0.354</i>         |
| # P-T2.5-015-060FH-ALU-SET-03.00 | 15          | 6.0                | 3.000         | Aluminium      | Set Screw         | FH_G_H (Double Flange FH Type) | 11.93                  | 15.0                    | 16.00                  | 15.00                |
|                                  |             | <i>0.236</i>       | <i>0.118</i>  |                |                   |                                | <i>0.470</i>           | <i>0.591</i>            | <i>0.630</i>           | <i>0.591</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)                | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|-----------------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                                   | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| # P-T2.5-015-060FF-ACE-NIL-03.50 | 15          | 6.0                | 3.500         | Acetal - Black | No Locking Device | FF_NL_HW<br>(Double Flange)       | 11.93                  | 13.0                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                   | <i>0.470</i>           | <i>0.512</i>            | <i>0.551</i>           | <i>0.354</i>         |
| # P-T2.5-015-060SF-ACE-NIL-03.50 | 15          | 6.0                | 3.500         | Acetal - Black | No Locking Device | SF_NL_2HW<br>(Single Flange)      | 11.93                  | 13.0                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                   | <i>0.470</i>           | <i>0.512</i>            | <i>0.551</i>           | <i>0.354</i>         |
| P-T2.5-016-060FH-ALU-SET-03.00   | 16          | 6.0                | 3.000         | Aluminium      | Set Screw         | FH_G_H<br>(Double Flange FH Type) | 12.73                  | 15.0                    | 16.00                  | 15.00                |
|                                  |             | <i>0.236</i>       | <i>0.118</i>  |                |                   |                                   | <i>0.501</i>           | <i>0.591</i>            | <i>0.630</i>           | <i>0.591</i>         |
| # P-T2.5-016-060SF-ACE-NIL-03.50 | 16          | 6.0                | 3.500         | Acetal - Black | No Locking Device | SF_NL_2HW<br>(Single Flange)      | 12.73                  | 13.8                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                   | <i>0.501</i>           | <i>0.543</i>            | <i>0.551</i>           | <i>0.354</i>         |
| # P-T2.5-016-060FF-ACE-NIL-03.50 | 16          | 6.0                | 3.500         | Acetal - Black | No Locking Device | FF_NL_HW<br>(Double Flange)       | 12.73                  | 13.8                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                   | <i>0.501</i>           | <i>0.543</i>            | <i>0.551</i>           | <i>0.354</i>         |
| # P-T2.5-017-060FF-ACE-NIL-03.50 | 17          | 6.0                | 3.500         | Acetal - Black | No Locking Device | FF_NL_HW<br>(Double Flange)       | 13.52                  | 14.6                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                   | <i>0.532</i>           | <i>0.575</i>            | <i>0.551</i>           | <i>0.354</i>         |
| # P-T2.5-017-060SF-ACE-NIL-03.50 | 17          | 6.0                | 3.500         | Acetal - Black | No Locking Device | SF_NL_2HW<br>(Single Flange)      | 13.52                  | 14.6                    | 14.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.138</i>  |                |                   |                                   | <i>0.532</i>           | <i>0.575</i>            | <i>0.551</i>           | <i>0.354</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)        | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|---------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                           | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| # P-T2.5-018-060FF-ACE-NIL-04.00 | 18          | 6.0                | 4.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 14.32                  | 15.4                    | 15.00                  |                      |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.564</i>           | <i>0.606</i>            | <i>0.591</i>           |                      |
| P-T2.5-018-060FF-ALU-SET-04.00   | 18          | 6.0                | 4.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 14.32                  | 17.5                    | 16.00                  | 9.00                 |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.564</i>           | <i>0.689</i>            | <i>0.630</i>           | <i>0.354</i>         |
| # P-T2.5-018-060SF-ACE-NIL-04.00 | 18          | 6.0                | 4.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 14.32                  | 15.4                    | 15.00                  |                      |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.564</i>           | <i>0.606</i>            | <i>0.591</i>           |                      |
| # P-T2.5-019-060FF-ACE-NIL-04.00 | 19          | 6.0                | 4.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 15.11                  | 16.2                    | 15.00                  |                      |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.595</i>           | <i>0.638</i>            | <i>0.591</i>           |                      |
| # P-T2.5-019-060FF-ALU-SET-04.00 | 19          | 6.0                | 4.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 15.11                  | 18.0                    | 16.00                  |                      |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.595</i>           | <i>0.709</i>            | <i>0.630</i>           |                      |
| # P-T2.5-019-060SF-ACE-NIL-04.00 | 19          | 6.0                | 4.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 15.11                  | 16.2                    | 15.00                  |                      |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.595</i>           | <i>0.638</i>            | <i>0.591</i>           |                      |
| # P-T2.5-020-060FF-ACE-NIL-04.00 | 20          | 6.0                | 4.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 15.91                  | 17.0                    | 15.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.626</i>           | <i>0.669</i>            | <i>0.591</i>           | <i>0.472</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)        | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|---------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                           | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| # P-T2.5-020-060FF-ALU-SET-04.00 | 20          | 6.0                | 4.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 15.91                  | 20.0                    | 16.00                  | 11.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.626</i>           | <i>0.787</i>            | <i>0.630</i>           | <i>0.433</i>         |
| # P-T2.5-020-060SF-ACE-NIL-04.00 | 20          | 6.0                | 4.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 15.91                  | 17.0                    | 15.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.626</i>           | <i>0.669</i>            | <i>0.591</i>           | <i>0.472</i>         |
| # P-T2.5-022-060FF-ACE-NIL-04.00 | 22          | 6.0                | 4.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 17.50                  | 18.6                    | 15.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.689</i>           | <i>0.732</i>            | <i>0.591</i>           | <i>0.472</i>         |
| # P-T2.5-022-060FF-ALU-SET-04.00 | 22          | 6.0                | 4.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 17.50                  | 23.0                    | 16.00                  | 11.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.689</i>           | <i>0.906</i>            | <i>0.630</i>           | <i>0.433</i>         |
| # P-T2.5-022-060SF-ACE-NIL-04.00 | 22          | 6.0                | 4.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 17.50                  | 18.6                    | 15.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.689</i>           | <i>0.732</i>            | <i>0.591</i>           | <i>0.472</i>         |
| P-T2.5-024-060FF-ALU-SET-04.00   | 24          | 6.0                | 4.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 19.09                  | 23.0                    | 16.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.752</i>           | <i>0.906</i>            | <i>0.630</i>           | <i>0.472</i>         |
| # P-T2.5-025-060FF-ALU-SET-04.00 | 25          | 6.0                | 4.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 19.89                  | 23.0                    | 16.00                  | 13.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.783</i>           | <i>0.906</i>            | <i>0.630</i>           | <i>0.512</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)        | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|---------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                           | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| # P-T2.5-025-060FF-ACE-NIL-05.00 | 25          | 6.0                | 5.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 19.89                  | 21.0                    | 15.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.197</i>  |                |                   |                           | <i>0.783</i>           | <i>0.827</i>            | <i>0.591</i>           | <i>0.472</i>         |
| # P-T2.5-025-060SF-ACE-NIL-05.00 | 25          | 6.0                | 5.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 19.89                  | 21.0                    | 15.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.197</i>  |                |                   |                           | <i>0.783</i>           | <i>0.827</i>            | <i>0.591</i>           | <i>0.472</i>         |
| # P-T2.5-026-060FF-ALU-SET-04.00 | 26          | 6.0                | 4.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 20.68                  | 25.5                    | 16.00                  | 14.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.814</i>           | <i>1.004</i>            | <i>0.630</i>           | <i>0.551</i>         |
| P-T2.5-028-060FF-ALU-SET-04.00   | 28          | 6.0                | 4.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 22.27                  | 25.5                    | 16.00                  | 14.00                |
|                                  |             | <i>0.236</i>       | <i>0.157</i>  |                |                   |                           | <i>0.877</i>           | <i>1.004</i>            | <i>0.630</i>           | <i>0.551</i>         |
| # P-T2.5-028-060FF-ACE-NIL-05.00 | 28          | 6.0                | 5.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 22.27                  | 23.4                    | 15.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.197</i>  |                |                   |                           | <i>0.877</i>           | <i>0.921</i>            | <i>0.591</i>           | <i>0.472</i>         |
| # P-T2.5-028-060SF-ACE-NIL-05.00 | 28          | 6.0                | 5.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 22.27                  | 23.4                    | 15.00                  | 12.00                |
|                                  |             | <i>0.236</i>       | <i>0.197</i>  |                |                   |                           | <i>0.877</i>           | <i>0.921</i>            | <i>0.591</i>           | <i>0.472</i>         |
| P-T2.5-030-060FF-ALU-SET-06.00   | 30          | 6.0                | 6.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 23.86                  | 26.0                    | 16.00                  | 16.00                |
|                                  |             | <i>0.236</i>       | <i>0.236</i>  |                |                   |                           | <i>0.939</i>           | <i>1.024</i>            | <i>0.630</i>           | <i>0.630</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)        | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|---------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                           | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| # P-T2.5-032-060FF-ACE-NIL-05.00 | 32          | 6.0                | 5.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 25.45                  | 26.6                    | 16.00                  | 15.00                |
|                                  |             | <i>0.236</i>       | <i>0.197</i>  |                |                   |                           | <i>1.002</i>           | <i>1.047</i>            | <i>0.630</i>           | <i>0.591</i>         |
| # P-T2.5-032-060SF-ACE-NIL-05.00 | 32          | 6.0                | 5.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 25.45                  | 26.6                    | 16.00                  | 15.00                |
|                                  |             | <i>0.236</i>       | <i>0.197</i>  |                |                   |                           | <i>1.002</i>           | <i>1.047</i>            | <i>0.630</i>           | <i>0.591</i>         |
| P-T2.5-032-060FF-ALU-SET-06.00   | 32          | 6.0                | 6.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 25.45                  | 29.0                    | 16.00                  | 16.00                |
|                                  |             | <i>0.236</i>       | <i>0.236</i>  |                |                   |                           | <i>1.002</i>           | <i>1.142</i>            | <i>0.630</i>           | <i>0.630</i>         |
| # P-T2.5-036-060FF-ACE-NIL-05.00 | 36          | 6.0                | 5.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 28.64                  | 29.8                    | 16.00                  | 15.00                |
|                                  |             | <i>0.236</i>       | <i>0.197</i>  |                |                   |                           | <i>1.128</i>           | <i>1.173</i>            | <i>0.630</i>           | <i>0.591</i>         |
| # P-T2.5-036-060SF-ACE-NIL-05.00 | 36          | 6.0                | 5.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 28.64                  | 29.8                    | 16.00                  | 15.00                |
|                                  |             | <i>0.236</i>       | <i>0.197</i>  |                |                   |                           | <i>1.128</i>           | <i>1.173</i>            | <i>0.630</i>           | <i>0.591</i>         |
| P-T2.5-036-060FF-ALU-SET-06.00   | 36          | 6.0                | 6.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 28.64                  | 36.0                    | 16.00                  |                      |
|                                  |             | <i>0.236</i>       | <i>0.236</i>  |                |                   |                           | <i>1.128</i>           | <i>1.417</i>            | <i>0.630</i>           |                      |
| P-T2.5-040-060FF-ALU-SET-06.00   | 40          | 6.0                | 6.000         | Aluminium      | Set Screw         | FF_G_H (Double Flange)    | 31.82                  | 37.5                    | 16.00                  | 22.00                |
|                                  |             | <i>0.236</i>       | <i>0.236</i>  |                |                   |                           | <i>1.253</i>           | <i>1.476</i>            | <i>0.630</i>           | <i>0.866</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)           | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|------------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                              | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| # P-T2.5-040-060FF-ACE-NIL-08.00 | 40          | 6.0                | 8.000         | Acetal - Black | No Locking Device | FF_NL_HW<br>(Double Flange)  | 31.82                  | 32.9                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                              | <i>1.253</i>           | <i>1.295</i>            | <i>0.630</i>           | <i>0.709</i>         |
| # P-T2.5-040-060SF-ACE-NIL-08.00 | 40          | 6.0                | 8.000         | Acetal - Black | No Locking Device | SF_NL_2HW<br>(Single Flange) | 31.82                  | 32.9                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                              | <i>1.253</i>           | <i>1.295</i>            | <i>0.630</i>           | <i>0.709</i>         |
| # P-T2.5-044-060P-ALU-SET-06.00  | 44          | 6.0                | 6.000         | Aluminium      | No Locking Device | P_G_H<br>(Unflanged)         | 35.00                  |                         | 16.00                  | 24.00                |
|                                  |             | <i>0.236</i>       | <i>0.236</i>  |                |                   |                              | <i>1.378</i>           |                         | <i>0.630</i>           | <i>0.945</i>         |
| # P-T2.5-048-060P-ALU-SET-06.00  | 48          | 6.0                | 6.000         | Aluminium      | No Locking Device | P_G_H<br>(Unflanged)         | 38.18                  |                         | 16.00                  | 26.00                |
|                                  |             | <i>0.236</i>       | <i>0.236</i>  |                |                   |                              | <i>1.503</i>           |                         | <i>0.630</i>           | <i>1.024</i>         |
| # P-T2.5-048-060FF-ACE-NIL-08.00 | 48          | 6.0                | 8.000         | Acetal - Black | No Locking Device | FF_NL_HW<br>(Double Flange)  | 38.18                  | 39.3                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                              | <i>1.503</i>           | <i>1.547</i>            | <i>0.630</i>           | <i>0.709</i>         |
| # P-T2.5-048-060SF-ACE-NIL-08.00 | 48          | 6.0                | 8.000         | Acetal - Black | No Locking Device | SF_NL_2HW<br>(Single Flange) | 38.18                  | 39.3                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                              | <i>1.503</i>           | <i>1.547</i>            | <i>0.630</i>           | <i>0.709</i>         |
| P-T2.5-060-060FF-ACE-NIL-08.00   | 60          | 6.0                | 8.000         | Acetal - Black | No Locking Device | FF_NL_HW<br>(Double Flange)  | 47.73                  | 48.9                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                              | <i>1.879</i>           | <i>1.925</i>            | <i>0.630</i>           | <i>0.709</i>         |
| # P-T2.5-060-060P-ALU-SET-08.00  | 60          | 6.0                | 8.000         | Aluminium      | No Locking Device | P_G_H<br>(Unflanged)         | 47.73                  |                         | 16.00                  | 34.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                              | <i>1.879</i>           |                         | <i>0.630</i>           | <i>1.339</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 2.500mm Pitch - T2.5

| Part Number                      | Teeth (No.) | Suit Belt Width mm | Bore (d) mm   | Material       | Locking Type      | Type (See Diagram)        | Pitch Diameter (PD) mm | Flange Diameter (FD) mm | Overall Length (OL) mm | Hub Diameter (HD) mm |
|----------------------------------|-------------|--------------------|---------------|----------------|-------------------|---------------------------|------------------------|-------------------------|------------------------|----------------------|
|                                  |             | <i>inches</i>      | <i>inches</i> |                |                   |                           | <i>inches</i>          | <i>inches</i>           | <i>inches</i>          | <i>inches</i>        |
| P-T2.5-060-060SF-ACE-NIL-08.00   | 60          | 6.0                | 8.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 47.73                  | 48.9                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                           | <i>1.879</i>           | <i>1.925</i>            | <i>0.630</i>           | <i>0.709</i>         |
| P-T2.5-072-060FF-ACE-NIL-08.00   | 72          | 6.0                | 8.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 57.27                  | 58.4                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                           | <i>2.255</i>           | <i>2.299</i>            | <i>0.630</i>           | <i>0.709</i>         |
| # P-T2.5-072-060SF-ACE-NIL-08.00 | 72          | 6.0                | 8.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 57.27                  | 58.4                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                           | <i>2.255</i>           | <i>2.299</i>            | <i>0.630</i>           | <i>0.709</i>         |
| # P-T2.5-084-060FF-ACE-NIL-08.00 | 84          | 6.0                | 8.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 66.82                  | 68.0                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                           | <i>2.631</i>           | <i>2.677</i>            | <i>0.630</i>           | <i>0.709</i>         |
| P-T2.5-084-060SF-ACE-NIL-08.00   | 84          | 6.0                | 8.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 66.82                  | 68.0                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                           | <i>2.631</i>           | <i>2.677</i>            | <i>0.630</i>           | <i>0.709</i>         |
| # P-T2.5-096-060SF-ACE-NIL-08.00 | 96          | 6.0                | 8.000         | Acetal - Black | No Locking Device | SF_NL_2HW (Single Flange) | 76.36                  | 77.5                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                           | <i>3.006</i>           | <i>3.051</i>            | <i>0.630</i>           | <i>0.709</i>         |
| # P-T2.5-096-060FF-ACE-NIL-08.00 | 96          | 6.0                | 8.000         | Acetal - Black | No Locking Device | FF_NL_HW (Double Flange)  | 76.36                  | 77.5                    | 16.00                  | 18.00                |
|                                  |             | <i>0.236</i>       | <i>0.315</i>  |                |                   |                           | <i>3.006</i>           | <i>3.051</i>            | <i>0.630</i>           | <i>0.709</i>         |

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to [catalogues@minibearings.com.au](mailto:catalogues@minibearings.com.au)

