




MBA

Pulleys - Timing - 3.000mm Pitch - GT

Timing Pulleys to suit GT 3.000mm Pitch Timing Belts.

Various materials as shown.

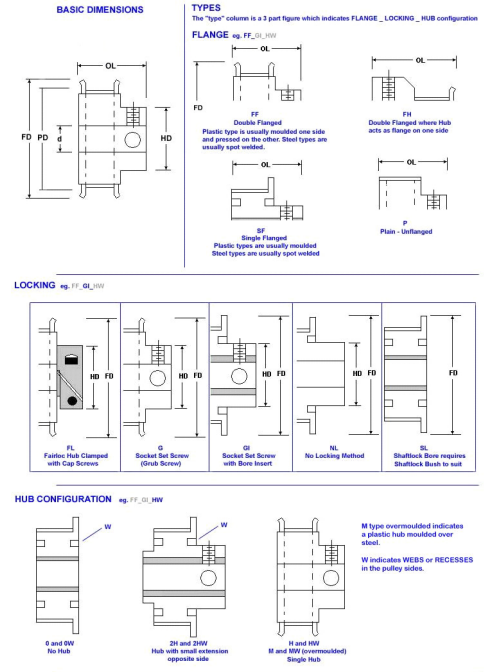

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-016-060FH-ALU-SET-04.763	16	6.0	4.763	Aluminium	Set Screw	FH_G_H (Double Flange FH Type)	15.27	18.3	14.29	18.34
		<i>0.236</i>	<i>0.188</i>				<i>0.601</i>	<i>0.720</i>	<i>0.563</i>	<i>0.722</i>
# P-G3-016-060FH-ALA-SET-06.000	16	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	15.27	18.0	14.50	18.00
		<i>0.236</i>	<i>0.236</i>				<i>0.601</i>	<i>0.709</i>	<i>0.571</i>	<i>0.709</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-016-090FF-PFR-AIS-04.000	16	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	15.27	21.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.601</i>	<i>0.827</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-016-090FF-PFR-NIL-04.000	16	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	15.27	21.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.601</i>	<i>0.827</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-016-090FF-PFR-AIS-04.763	16	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	15.27	20.8	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.601</i>	<i>0.819</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-016-090FF-PFR-NIL-04.763	16	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	15.27	20.8	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.601</i>	<i>0.819</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-016-090FH-ALU-SET-04.763	16	9.0	4.763	Aluminium	Set Screw	FH_G_H (Double Flange FH Type)	15.27	18.3	17.46	18.34
		<i>0.354</i>	<i>0.188</i>				<i>0.601</i>	<i>0.720</i>	<i>0.687</i>	<i>0.722</i>
P-G3-016-090FH-ALA-SET-06.000	16	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	15.27	18.0	17.50	18.00
		<i>0.354</i>	<i>0.236</i>				<i>0.601</i>	<i>0.709</i>	<i>0.689</i>	<i>0.709</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-017-060FH-ALU-SET-04.763	17	6.0	4.763	Aluminium	Set Screw	FH_G_H (Double Flange FH Type)	16.23	18.8	14.29	18.80
		<i>0.236</i>	<i>0.188</i>				<i>0.639</i>	<i>0.740</i>	<i>0.563</i>	<i>0.740</i>
# P-G3-017-060FH-ALA-SET-06.000	17	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	16.23	18.8	14.50	18.80
		<i>0.236</i>	<i>0.236</i>				<i>0.639</i>	<i>0.740</i>	<i>0.571</i>	<i>0.740</i>
# P-G3-017-090FF-PFR-NIL-04.000	17	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	16.23	22.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.639</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-017-090FF-PFR-AIS-04.000	17	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	16.23	22.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.639</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-017-090FH-ALU-SET-04.763	17	9.0	4.763	Aluminium	Set Screw	FH_G_H (Double Flange FH Type)	16.23	18.8	17.46	18.80
		<i>0.354</i>	<i>0.188</i>				<i>0.639</i>	<i>0.740</i>	<i>0.687</i>	<i>0.740</i>
# P-G3-017-090FF-PFR-AIS-04.763	17	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	16.23	23.0	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.639</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-017-090FF-PFR-NIL-04.763	17	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	16.23	23.0	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.639</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>
P-G3-017-090FF-PFR-AIS-05.000	17	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	16.23	22.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.639</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-017-090FF-PFR-AIS-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	16.23	22.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.639</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-017-090FH-ALA-SET-06.000	17	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FH_G_H (Double Flange FH Type)	16.23	18.8	17.50	18.80
		<i>0.354</i>	<i>0.236</i>				<i>0.639</i>	<i>0.740</i>	<i>0.689</i>	<i>0.740</i>
P-G3-017-090FF-PFR-AIS-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	16.23	23.0	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.639</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-018-060FF-ALA-SET-06.000	18	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.18	20.0	17.50	11.20
		<i>0.236</i>	<i>0.236</i>				<i>0.676</i>	<i>0.787</i>	<i>0.689</i>	<i>0.441</i>
# P-G3-018-060FF-ALU-SET-06.350	18	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	17.18	20.7	17.46	11.23
		<i>0.236</i>	<i>0.250</i>				<i>0.676</i>	<i>0.815</i>	<i>0.687</i>	<i>0.442</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-018-090FF-PFR-NIL-04.000	18	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	17.18	24.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.676</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-018-090FF-PFR-AIS-04.000	18	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.18	22.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.676</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-018-090FF-PFR-NIL-04.763	18	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	17.18	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.676</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-018-090FF-PFR-AIS-04.763	18	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	17.18	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.676</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-018-090FF-PFR-AIS-05.000	18	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.18	22.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.676</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-018-090FF-PFR-AIS-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.18	22.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.676</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-018-090FF-ALA-SET-06.000	18	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.18	20.0	20.60	11.20
		<i>0.354</i>	<i>0.236</i>				<i>0.676</i>	<i>0.787</i>	<i>0.811</i>	<i>0.441</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-018-090FH-ALA-FLC-06.00	18	9.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	17.18	20.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.676</i>	<i>0.787</i>	<i>0.811</i>	<i>0.752</i>
# P-G3-018-090FF-ALU-SET-06.350	18	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	17.18	20.7	20.64	11.23
		<i>0.354</i>	<i>0.250</i>				<i>0.676</i>	<i>0.815</i>	<i>0.813</i>	<i>0.442</i>
# P-G3-018-090FH-ALA-FLC-06.350	18	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	17.18	20.7	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.676</i>	<i>0.815</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-018-090FF-PFR-AIS-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	17.18	23.6	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.676</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-019-060FF-ALA-SET-06.000	19	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	18.14	20.7	17.50	11.90
		<i>0.236</i>	<i>0.236</i>				<i>0.714</i>	<i>0.815</i>	<i>0.689</i>	<i>0.469</i>
# P-G3-019-060FF-ALU-SET-06.350	19	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	18.14	20.7	17.46	11.89
		<i>0.236</i>	<i>0.250</i>				<i>0.714</i>	<i>0.815</i>	<i>0.687</i>	<i>0.468</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-019-090FF-PFR-NIL-04.000	19	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	18.14	24.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.714</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-019-090FF-PFR-AIS-04.000	19	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	18.14	22.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.714</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-019-090FF-PFR-AIS-04.763	19	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	18.14	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.714</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-019-090FF-PFR-NIL-04.763	19	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	18.14	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.714</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-019-090FF-PFR-AIS-05.000	19	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	18.14	22.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.714</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-019-090FF-PFR-AIS-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	18.14	22.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.714</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-019-090FF-ALA-SET-06.000	19	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	18.14	20.7	20.60	11.90
		<i>0.354</i>	<i>0.236</i>				<i>0.714</i>	<i>0.815</i>	<i>0.811</i>	<i>0.469</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-019-090FF-PFR-AIS-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	18.14	23.6	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.714</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-019-090FF-ALU-SET-06.350	19	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	18.14	20.7	20.64	11.89
		<i>0.354</i>	<i>0.250</i>				<i>0.714</i>	<i>0.815</i>	<i>0.813</i>	<i>0.468</i>
P-G3-020-060FF-ALA-SET-06.000	20	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	22.7	17.50	12.70
		<i>0.236</i>	<i>0.236</i>				<i>0.752</i>	<i>0.894</i>	<i>0.689</i>	<i>0.500</i>
# P-G3-020-060FF-ALU-SET-06.350	20	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	19.09	22.7	17.46	12.70
		<i>0.236</i>	<i>0.250</i>				<i>0.752</i>	<i>0.894</i>	<i>0.687</i>	<i>0.500</i>
# P-G3-020-090FF-PFR-AIS-04.000	20	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-020-090FF-PFR-NIL-04.000	20	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-020-090FF-PFR-NIL-04.763	20	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-020-090FF-PFR-AIS-04.763	20	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-020-090FF-PFR-AIS-05.000	20	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-020-090FF-PFR-AIS-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-020-090FF-ALA-SET-06.000	20	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	22.7	20.60	12.70
		<i>0.354</i>	<i>0.236</i>				<i>0.752</i>	<i>0.894</i>	<i>0.811</i>	<i>0.500</i>
# P-G3-020-090FH-ALA-FLC-06.00	20	9.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	19.09	22.7	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.752</i>	<i>0.894</i>	<i>0.811</i>	<i>0.752</i>
# P-G3-020-090FF-PFR-AIS-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-020-090FH-ALA-FLC-06.350	20	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	19.09	22.7	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.752</i>	<i>0.894</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-020-090FF-ALU-SET-06.350	20	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	19.09	22.7	20.64	12.70
		<i>0.354</i>	<i>0.250</i>				<i>0.752</i>	<i>0.894</i>	<i>0.813</i>	<i>0.500</i>
P-G3-021-060FF-ALA-SET-06.000	21	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.05	22.7	17.50	12.70
		<i>0.236</i>	<i>0.236</i>				<i>0.789</i>	<i>0.894</i>	<i>0.689</i>	<i>0.500</i>
# P-G3-021-060FF-ALU-SET-06.350	21	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	20.05	22.7	17.46	12.70
		<i>0.236</i>	<i>0.250</i>				<i>0.789</i>	<i>0.894</i>	<i>0.687</i>	<i>0.500</i>
# P-G3-021-090FF-ALA-SET-06.000	21	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.05	22.7	20.60	12.70
		<i>0.354</i>	<i>0.236</i>				<i>0.789</i>	<i>0.894</i>	<i>0.811</i>	<i>0.500</i>
# P-G3-021-090FF-ALU-SET-06.350	21	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	20.05	22.7	20.64	12.70
		<i>0.354</i>	<i>0.250</i>				<i>0.789</i>	<i>0.894</i>	<i>0.813</i>	<i>0.500</i>
# P-G3-022-060FF-ALA-SET-06.000	22	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	21.00	24.0	17.50	14.30
		<i>0.236</i>	<i>0.236</i>				<i>0.827</i>	<i>0.945</i>	<i>0.689</i>	<i>0.563</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-022-060FF-ALU-SET-06.350	22	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	21.00	24.3	17.46	14.28
		<i>0.236</i>	<i>0.250</i>				<i>0.827</i>	<i>0.957</i>	<i>0.687</i>	<i>0.562</i>
# P-G3-022-090FF-PFR-NIL-04.000	22	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	21.00	27.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-022-090FF-PFR-AIS-04.000	22	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	21.00	27.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-022-090FF-PFR-NIL-04.763	22	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	21.00	26.9	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-022-090FF-PFR-AIS-04.763	22	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	21.00	26.9	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-022-090FF-PFR-AIS-05.000	22	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	21.00	27.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-022-090FH-ALA-FLC-06.00	22	9.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	21.00	24.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.827</i>	<i>0.945</i>	<i>0.811</i>	<i>0.752</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-022-090FF-PFR-AIS-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	21.00	27.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-G3-022-090FF-ALA-SET-06.000	22	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	21.00	24.0	20.60	14.30
		<i>0.354</i>	<i>0.236</i>				<i>0.827</i>	<i>0.945</i>	<i>0.811</i>	<i>0.563</i>
# P-G3-022-090FF-ALU-SET-06.350	22	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	21.00	24.3	20.64	14.28
		<i>0.354</i>	<i>0.250</i>				<i>0.827</i>	<i>0.957</i>	<i>0.813</i>	<i>0.562</i>
# P-G3-022-090FH-ALA-FLC-06.350	22	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	21.00	24.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.827</i>	<i>0.957</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-022-090FF-PFR-AIS-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	21.00	26.9	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-G3-024-060FF-ALA-SET-06.000	24	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.91	26.0	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.902</i>	<i>1.024</i>	<i>0.689</i>	<i>0.626</i>
# P-G3-024-060FF-ALU-SET-06.350	24	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	22.91	26.4	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.902</i>	<i>1.039</i>	<i>0.687</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-024-090FH-ALA-FLC-06.00	24	9.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	22.91	26.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.902</i>	<i>1.024</i>	<i>0.811</i>	<i>0.752</i>
# P-G3-024-090FF-ALA-SET-06.000	24	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.91	26.0	20.60	15.90
		<i>0.354</i>	<i>0.236</i>				<i>0.902</i>	<i>1.024</i>	<i>0.811</i>	<i>0.626</i>
# P-G3-024-090FH-ALA-FLC-06.350	24	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	22.91	31.8	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.902</i>	<i>1.252</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-024-090FF-ALU-SET-06.350	24	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	22.91	26.4	20.64	15.88
		<i>0.354</i>	<i>0.250</i>				<i>0.902</i>	<i>1.039</i>	<i>0.813</i>	<i>0.625</i>
# P-G3-025-060FF-ALA-SET-06.000	25	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	23.86	26.9	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.939</i>	<i>1.059</i>	<i>0.689</i>	<i>0.626</i>
# P-G3-025-060FF-ALU-SET-06.350	25	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	23.86	26.9	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.939</i>	<i>1.059</i>	<i>0.687</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-025-090FF-PFR-NIL-04.763	25	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.188</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-025-090FF-ALA-SET-06.000	25	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	23.86	26.9	20.60	15.90
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.059</i>	<i>0.811</i>	<i>0.626</i>
# P-G3-025-090FF-PFR-AIS-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	23.86	30.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-025-090FH-ALA-FLC-06.00	25	9.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	23.86	26.9	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.059</i>	<i>0.811</i>	<i>0.752</i>
# P-G3-025-090FF-PFR-NIL-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	23.86	30.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-025-090FF-ALU-SET-06.350	25	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	23.86	26.9	20.64	15.88
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.059</i>	<i>0.813</i>	<i>0.625</i>
# P-G3-025-090FF-PFR-AIS-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-025-090FH-ALA-FLC-06.350	25	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	23.86	26.9	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.059</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-025-090FF-PFR-AIS-07.938	25	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-025-090FF-PFR-AIS-08.000	25	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	23.86	30.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-025-090FF-PFR-AIS-09.525	25	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-026-060FF-ALA-SET-06.000	26	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.82	28.1	17.50	15.90
		<i>0.236</i>	<i>0.236</i>				<i>0.977</i>	<i>1.106</i>	<i>0.689</i>	<i>0.626</i>
# P-G3-026-060FF-ALU-SET-06.350	26	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	24.82	28.7	17.46	15.88
		<i>0.236</i>	<i>0.250</i>				<i>0.977</i>	<i>1.130</i>	<i>0.687</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-026-090FH-ALA-FLC-06.00	26	9.0	6.000	Aluminium	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	24.82	28.1	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.977</i>	<i>1.106</i>	<i>0.811</i>	<i>0.752</i>
P-G3-026-090FF-ALA-SET-06.000	26	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.82	28.1	20.60	15.90
		<i>0.354</i>	<i>0.236</i>				<i>0.977</i>	<i>1.106</i>	<i>0.811</i>	<i>0.626</i>
# P-G3-026-090FF-ALU-SET-06.350	26	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	24.82	28.7	20.64	15.88
		<i>0.354</i>	<i>0.250</i>				<i>0.977</i>	<i>1.130</i>	<i>0.813</i>	<i>0.625</i>
# P-G3-026-090FH-ALA-FLC-06.350	26	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FH_FL_H (Double Flange FH Type)	24.82	28.7	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.977</i>	<i>1.130</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-028-060FF-ALA-SET-06.000	28	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	26.73	29.8	17.50	17.80
		<i>0.236</i>	<i>0.236</i>				<i>1.052</i>	<i>1.173</i>	<i>0.689</i>	<i>0.701</i>
# P-G3-028-060FF-ALU-SET-06.350	28	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	26.73	29.8	17.46	17.85
		<i>0.236</i>	<i>0.250</i>				<i>1.052</i>	<i>1.173</i>	<i>0.687</i>	<i>0.703</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-028-090FF-PFR-NIL-04.763	28	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	26.73	31.5	20.64	19.50
		<i>0.354</i>	<i>0.188</i>				<i>1.052</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-028-090FF-PFR-FLC-05.000	28	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	26.73	31.5	20.64	22.20
		<i>0.354</i>	<i>0.197</i>				<i>1.052</i>	<i>1.240</i>	<i>0.813</i>	<i>0.874</i>
P-G3-028-090FF-PFR-NIL-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	26.73	32.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.052</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-028-090FF-ALA-SET-06.000	28	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	26.73	29.8	20.60	17.80
		<i>0.354</i>	<i>0.236</i>				<i>1.052</i>	<i>1.173</i>	<i>0.811</i>	<i>0.701</i>
# P-G3-028-090FF-PFR-AIS-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	26.73	32.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.052</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-028-090FF-ALU-SET-06.350	28	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	26.73	29.8	20.64	17.85
		<i>0.354</i>	<i>0.250</i>				<i>1.052</i>	<i>1.173</i>	<i>0.813</i>	<i>0.703</i>
# P-G3-028-090FF-PFR-AIS-07.938	28	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	26.73	31.5	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.052</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G3-028-090FF-PFR-FLC-08.000	28	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	26.73	31.5	20.64	22.20
		<i>0.354</i>	<i>0.315</i>				<i>1.052</i>	<i>1.240</i>	<i>0.813</i>	<i>0.874</i>
P-G3-028-090FF-PFR-AIS-08.000	28	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	26.73	32.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>1.052</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-028-090FF-PFR-AIS-09.525	28	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	26.73	31.5	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.052</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-028-090FF-PFR-AIS-06.350	28	9.0	635.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	26.73	31.5	20.64	19.50
		<i>0.354</i>	<i>25.000</i>				<i>1.052</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-030-060FF-ALA-SET-06.000	30	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	31.8	17.50	19.70
		<i>0.236</i>	<i>0.236</i>				<i>1.128</i>	<i>1.252</i>	<i>0.689</i>	<i>0.776</i>
# P-G3-030-060FF-ALU-SET-06.350	30	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	28.64	31.8	17.46	19.71
		<i>0.236</i>	<i>0.250</i>				<i>1.128</i>	<i>1.252</i>	<i>0.687</i>	<i>0.776</i>
# P-G3-030-090FF-ALA-SET-06.000	30	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	31.8	20.60	19.70
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.252</i>	<i>0.811</i>	<i>0.776</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-030-090FF-ALA-FLC-06.00	30	9.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	28.64	31.8	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.252</i>	<i>0.811</i>	<i>0.752</i>
# P-G3-030-090FF-ALA-FLC-06.350	30	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	28.64	31.8	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.252</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-030-090FF-ALU-SET-06.350	30	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	28.64	31.8	20.64	19.71
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.252</i>	<i>0.813</i>	<i>0.776</i>
# P-G3-032-060FF-ALA-SET-06.000	32	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.55	33.6	17.50	21.60
		<i>0.236</i>	<i>0.236</i>				<i>1.203</i>	<i>1.323</i>	<i>0.689</i>	<i>0.850</i>
# P-G3-032-060FF-ALU-SET-06.350	32	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	30.55	33.6	17.46	21.62
		<i>0.236</i>	<i>0.250</i>				<i>1.203</i>	<i>1.323</i>	<i>0.687</i>	<i>0.851</i>
# P-G3-032-090FF-ALA-FLC-06.00	32	9.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	30.55	33.6	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.203</i>	<i>1.323</i>	<i>0.811</i>	<i>0.752</i>
# P-G3-032-090FF-ALA-SET-06.000	32	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.55	33.6	20.60	21.60
		<i>0.354</i>	<i>0.236</i>				<i>1.203</i>	<i>1.323</i>	<i>0.811</i>	<i>0.850</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-G3-032-090FF-PFR-AIS-06.000	32	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	30.55	37.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.203</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-032-090FF-PFR-NIL-06.000	32	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	30.55	37.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.203</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-032-090FF-PFR-AIS-06.350	32	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.55	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.203</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-032-090FF-ALA-FLC-06.350	32	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	30.55	33.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.203</i>	<i>1.323</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-032-090FF-ALU-SET-06.350	32	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	30.55	33.6	20.64	21.62
		<i>0.354</i>	<i>0.250</i>				<i>1.203</i>	<i>1.323</i>	<i>0.813</i>	<i>0.851</i>
# P-G3-032-090FF-PFR-NIL-06.350	32	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	30.55	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.203</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-032-090FF-PFR-AIS-07.938	32	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.55	36.6	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.203</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-032-090FF-PFR-AIS-08.000	32	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	30.55	37.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>1.203</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-G3-032-090FF-PFR-AIS-09.525	32	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.55	36.6	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.203</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-G3-034-060FF-ALA-SET-06.000	34	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.45	35.5	18.30	23.40
		<i>0.236</i>	<i>0.236</i>				<i>1.278</i>	<i>1.398</i>	<i>0.720</i>	<i>0.921</i>
# P-G3-034-060P-ALA-SET-06.000	34	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	32.45		18.30	23.40
		<i>0.236</i>	<i>0.236</i>				<i>1.278</i>		<i>0.720</i>	<i>0.921</i>
# P-G3-034-060P-ALU-SET-06.350	34	6.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	32.45		18.26	23.39
		<i>0.236</i>	<i>0.250</i>				<i>1.278</i>		<i>0.719</i>	<i>0.921</i>
# P-G3-034-060FF-ALU-SET-06.350	34	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	32.45	35.6	18.26	23.39
		<i>0.236</i>	<i>0.250</i>				<i>1.278</i>	<i>1.402</i>	<i>0.719</i>	<i>0.921</i>
# P-G3-034-090P-ALA-SET-06.000	34	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	32.45		21.40	23.40
		<i>0.354</i>	<i>0.236</i>				<i>1.278</i>		<i>0.843</i>	<i>0.921</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-034-090P-ALA-FLC-06.00	34	9.0	6.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	32.45	-	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.278</i>		<i>0.843</i>	<i>0.752</i>
# P-G3-034-090FF-ALA-FLC-06.00	34	9.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	32.45	35.5	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.278</i>	<i>1.398</i>	<i>0.843</i>	<i>0.752</i>
# P-G3-034-090FF-ALA-SET-06.000	34	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.45	35.5	21.40	23.40
		<i>0.354</i>	<i>0.236</i>				<i>1.278</i>	<i>1.398</i>	<i>0.843</i>	<i>0.921</i>
# P-G3-034-090FF-ALU-SET-06.350	34	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	32.45	35.6	21.43	23.39
		<i>0.354</i>	<i>0.250</i>				<i>1.278</i>	<i>1.402</i>	<i>0.844</i>	<i>0.921</i>
# P-G3-034-090P-ALA-FLC-06.350	34	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	32.45		21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.278</i>		<i>0.844</i>	<i>0.768</i>
# P-G3-034-090P-ALU-SET-06.350	34	9.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	32.45		21.43	23.39
		<i>0.354</i>	<i>0.250</i>				<i>1.278</i>		<i>0.844</i>	<i>0.921</i>
# P-G3-034-090FF-ALA-FLC-06.350	34	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	32.45	35.6	21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.278</i>	<i>1.402</i>	<i>0.844</i>	<i>0.768</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-036-060P-ALA-SET-06.000	36	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	34.36		18.30	25.40
		<i>0.236</i>	<i>0.236</i>				<i>1.353</i>		<i>0.720</i>	<i>1.000</i>
# P-G3-036-060FF-ALA-SET-06.000	36	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	34.36	37.4	18.30	25.40
		<i>0.236</i>	<i>0.236</i>				<i>1.353</i>	<i>1.472</i>	<i>0.720</i>	<i>1.000</i>
# P-G3-036-060FF-ALU-SET-06.350	36	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	34.36	37.4	18.26	25.40
		<i>0.236</i>	<i>0.250</i>				<i>1.353</i>	<i>1.472</i>	<i>0.719</i>	<i>1.000</i>
# P-G3-036-060P-ALU-SET-06.350	36	6.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	34.36		18.26	25.40
		<i>0.236</i>	<i>0.250</i>				<i>1.353</i>		<i>0.719</i>	<i>1.000</i>
# P-G3-036-090FF-ALA-SET-06.000	36	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	34.36	37.4	21.40	25.40
		<i>0.354</i>	<i>0.236</i>				<i>1.353</i>	<i>1.472</i>	<i>0.843</i>	<i>1.000</i>
# P-G3-036-090FF-ALA-FLC-06.00	36	9.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	34.36	37.4	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.353</i>	<i>1.472</i>	<i>0.843</i>	<i>0.752</i>
# P-G3-036-090FF-PFR-NIL-06.000	36	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	34.36	40.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.353</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-036-090P-ALA-SET-06.000	36	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	34.36		21.40	25.40
		<i>0.354</i>	<i>0.236</i>				<i>1.353</i>		<i>0.843</i>	<i>1.000</i>
# P-G3-036-090FF-PFR-AIS-06.000	36	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	34.36	40.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.353</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-036-090P-ALA-FLC-06.00	36	9.0	6.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	34.36	-	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.353</i>		<i>0.843</i>	<i>0.752</i>
# P-G3-036-090FF-ALA-FLC-06.350	36	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	34.36	37.4	21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.353</i>	<i>1.472</i>	<i>0.844</i>	<i>0.768</i>
# P-G3-036-090FF-ALU-SET-06.350	36	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	34.36	37.4	21.43	25.40
		<i>0.354</i>	<i>0.250</i>				<i>1.353</i>	<i>1.472</i>	<i>0.844</i>	<i>1.000</i>
# P-G3-036-090FF-PFR-AIS-06.350	36	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	34.36	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.353</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-036-090FF-PFR-NIL-06.350	36	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	34.36	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.353</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-036-090P-ALA-FLC-06.350	36	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	34.36		21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.353</i>		<i>0.844</i>	<i>0.768</i>
# P-G3-036-090P-ALU-SET-06.350	36	9.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	34.36		21.43	25.40
		<i>0.354</i>	<i>0.250</i>				<i>1.353</i>		<i>0.844</i>	<i>1.000</i>
# P-G3-036-090FF-PFR-AIS-07.938	36	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	34.36	39.9	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.353</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-036-090FF-PFR-AIS-08.000	36	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	34.36	40.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.353</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-036-090FF-PFR-AIS-09.525	36	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	34.36	39.9	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.353</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-038-060P-ALA-SET-06.000	38	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	36.27		18.30	27.30
		<i>0.236</i>	<i>0.236</i>				<i>1.428</i>		<i>0.720</i>	<i>1.075</i>
# P-G3-038-060FF-ALA-SET-06.000	38	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	36.27	39.4	18.30	27.30
		<i>0.236</i>	<i>0.236</i>				<i>1.428</i>	<i>1.551</i>	<i>0.720</i>	<i>1.075</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-038-060P-ALU-SET-06.350	38	6.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	36.27		18.26	27.35
		<i>0.236</i>	<i>0.250</i>				<i>1.428</i>		<i>0.719</i>	<i>1.077</i>
# P-G3-038-060FF-ALU-SET-06.350	38	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	36.27	39.3	18.26	27.35
		<i>0.236</i>	<i>0.250</i>				<i>1.428</i>	<i>1.547</i>	<i>0.719</i>	<i>1.077</i>
# P-G3-038-090FF-ALA-SET-06.000	38	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	36.27	39.4	21.40	27.30
		<i>0.354</i>	<i>0.236</i>				<i>1.428</i>	<i>1.551</i>	<i>0.843</i>	<i>1.075</i>
# P-G3-038-090P-ALA-FLC-06.00	38	9.0	6.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	36.27	-	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.428</i>		<i>0.843</i>	<i>0.752</i>
# P-G3-038-090P-ALA-SET-06.000	38	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	36.27		21.40	27.30
		<i>0.354</i>	<i>0.236</i>				<i>1.428</i>		<i>0.843</i>	<i>1.075</i>
# P-G3-038-090FF-ALA-FLC-06.00	38	9.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	36.27	39.3	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.428</i>	<i>1.547</i>	<i>0.843</i>	<i>0.752</i>
# P-G3-038-090P-ALU-SET-06.350	38	9.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	36.27		21.43	27.35
		<i>0.354</i>	<i>0.250</i>				<i>1.428</i>		<i>0.844</i>	<i>1.077</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-038-090FF-ALA-FLC-06.350	38	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	36.27	39.3	21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.428</i>	<i>1.547</i>	<i>0.844</i>	<i>0.768</i>
# P-G3-038-090FF-ALU-SET-06.350	38	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	36.27	39.3	21.43	27.35
		<i>0.354</i>	<i>0.250</i>				<i>1.428</i>	<i>1.547</i>	<i>0.844</i>	<i>1.077</i>
# P-G3-038-090P-ALA-FLC-06.350	38	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	36.27		21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.428</i>		<i>0.844</i>	<i>0.768</i>
# P-G3-040-060P-ALA-SET-06.000	40	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		18.30	29.20
		<i>0.236</i>	<i>0.236</i>				<i>1.503</i>		<i>0.720</i>	<i>1.150</i>
# P-G3-040-060FF-ALA-SET-06.000	40	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	41.3	18.30	29.20
		<i>0.236</i>	<i>0.236</i>				<i>1.503</i>	<i>1.626</i>	<i>0.720</i>	<i>1.150</i>
# P-G3-040-060P-ALU-SET-06.350	40	6.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	38.18		18.26	29.21
		<i>0.236</i>	<i>0.250</i>				<i>1.503</i>		<i>0.719</i>	<i>1.150</i>
# P-G3-040-060FF-ALU-SET-06.350	40	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	38.18	41.3	18.26	29.21
		<i>0.236</i>	<i>0.250</i>				<i>1.503</i>	<i>1.626</i>	<i>0.719</i>	<i>1.150</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-040-090FF-ALA-FLC-06.00	40	9.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	38.18	41.3	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.503</i>	<i>1.626</i>	<i>0.843</i>	<i>0.752</i>
# P-G3-040-090FF-ALA-SET-06.000	40	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	41.3	21.40	29.20
		<i>0.354</i>	<i>0.236</i>				<i>1.503</i>	<i>1.626</i>	<i>0.843</i>	<i>1.150</i>
# P-G3-040-090FF-PFR-AIS-06.000	40	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	38.18	45.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.503</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-040-090P-ALA-SET-06.000	40	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18	-	21.40	29.20
		<i>0.354</i>	<i>0.236</i>				<i>1.503</i>		<i>0.843</i>	<i>1.150</i>
P-G3-040-090FF-PFR-NIL-06.000	40	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	38.18	45.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.503</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-040-090P-ALA-FLC-06.00	40	9.0	6.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	38.18	-	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.503</i>		<i>0.843</i>	<i>0.752</i>
# P-G3-040-090FF-PFR-AIS-06.350	40	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	38.18	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-040-090P-ALU-SET-06.350	40	9.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	38.18		21.43	29.21
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>		<i>0.844</i>	<i>1.150</i>
# P-G3-040-090FF-ALA-FLC-06.350	40	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	38.18	41.3	21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>	<i>1.626</i>	<i>0.844</i>	<i>0.768</i>
# P-G3-040-090FF-ALU-SET-06.350	40	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	38.18	41.3	21.43	29.21
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>	<i>1.626</i>	<i>0.844</i>	<i>1.150</i>
# P-G3-040-090P-ALA-FLC-06.350	40	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	38.18		21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>		<i>0.844</i>	<i>0.768</i>
# P-G3-040-090FF-PFR-NIL-06.350	40	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	38.18	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-040-090FF-PFR-AIS-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	38.18	44.7	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.503</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-040-090FF-PFR-AIS-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	38.18	45.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.503</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-040-090FF-PFR-AIS-09.525	40	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	38.18	44.7	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.503</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-044-060P-ALA-SET-06.000	44	6.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	42.00		18.30	33.00
		<i>0.236</i>	<i>0.236</i>				<i>1.654</i>		<i>0.720</i>	<i>1.299</i>
# P-G3-044-060FF-ALA-SET-06.000	44	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.00	45.1	18.30	33.00
		<i>0.236</i>	<i>0.236</i>				<i>1.654</i>	<i>1.776</i>	<i>0.720</i>	<i>1.299</i>
# P-G3-044-060FF-ALU-SET-06.350	44	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	42.00	45.9	18.26	33.20
		<i>0.236</i>	<i>0.250</i>				<i>1.654</i>	<i>1.807</i>	<i>0.719</i>	<i>1.307</i>
# P-G3-044-060P-ALU-SET-06.350	44	6.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	42.00		18.26	33.20
		<i>0.236</i>	<i>0.250</i>				<i>1.654</i>		<i>0.719</i>	<i>1.307</i>
P-G3-044-090FF-ALA-SET-06.000	44	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.00	45.1	21.40	33.00
		<i>0.354</i>	<i>0.236</i>				<i>1.654</i>	<i>1.776</i>	<i>0.843</i>	<i>1.299</i>
# P-G3-044-090P-ALA-SET-06.000	44	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	42.00		21.40	33.00
		<i>0.354</i>	<i>0.236</i>				<i>1.654</i>		<i>0.843</i>	<i>1.299</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-044-090FF-ALU-SET-06.350	44	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	42.00	45.9	21.43	33.20
		<i>0.354</i>	<i>0.250</i>				<i>1.654</i>	<i>1.807</i>	<i>0.844</i>	<i>1.307</i>
# P-G3-044-090P-ALU-SET-06.350	44	9.0	6.350	Aluminium	Set Screw	P_G_H (Unflanged)	42.00		21.43	33.20
		<i>0.354</i>	<i>0.250</i>				<i>1.654</i>		<i>0.844</i>	<i>1.307</i>
# P-G3-045-060FF-ALA-SET-06.000	45	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.95	45.1	18.30	33.00
		<i>0.236</i>	<i>0.236</i>				<i>1.691</i>	<i>1.776</i>	<i>0.720</i>	<i>1.299</i>
# P-G3-045-060FF-ALU-SET-06.350	45	6.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	42.95	45.9	18.26	33.20
		<i>0.236</i>	<i>0.250</i>				<i>1.691</i>	<i>1.807</i>	<i>0.719</i>	<i>1.307</i>
# P-G3-045-060P-ALU-SET-07.938	45	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	42.95		18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>1.691</i>		<i>0.734</i>	<i>1.250</i>
# P-G3-045-060P-ALA-SET-08.000	45	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	42.95		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>1.691</i>		<i>0.732</i>	<i>1.252</i>
# P-G3-045-090FF-ALA-FLC-06.00	45	9.0	6.000	Aluminium	Fairloc Hub - tm-	FF_FL_H (Double Flange)	42.95	45.1	21.40	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.691</i>	<i>1.776</i>	<i>0.843</i>	<i>0.752</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-045-090FF-ALA-SET-06.000	45	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.95	45.1	21.40	33.00
		<i>0.354</i>	<i>0.236</i>				<i>1.691</i>	<i>1.776</i>	<i>0.843</i>	<i>1.299</i>
# P-G3-045-090FF-ALA-FLC-06.350	45	9.0	6.350	Aluminium, Clear Anodised	Fairloc Hub - tm-	FF_FL_H (Double Flange)	42.95	45.9	21.43	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.691</i>	<i>1.807</i>	<i>0.844</i>	<i>0.768</i>
# P-G3-045-090FF-ALU-SET-06.350	45	9.0	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	42.95	45.9	21.43	33.20
		<i>0.354</i>	<i>0.250</i>				<i>1.691</i>	<i>1.807</i>	<i>0.844</i>	<i>1.307</i>
# P-G3-045-090P-ALU-SET-07.938	45	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	42.95	-	22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>1.691</i>		<i>0.875</i>	<i>1.250</i>
# P-G3-045-090P-ALA-FLC-07.938	45	9.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	42.95	-	22.23	25.40
		<i>0.354</i>	<i>0.313</i>				<i>1.691</i>		<i>0.875</i>	<i>1.000</i>
# P-G3-045-090P-ALA-SET-08.000	45	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	42.95	-	22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>1.691</i>		<i>0.874</i>	<i>1.252</i>
# P-G3-045-090P-ALA-FLC-08.00	45	9.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	42.95	-	22.20	25.40
		<i>0.354</i>	<i>0.315</i>				<i>1.691</i>		<i>0.874</i>	<i>1.000</i>
# P-G3-048-060P-ALU-SET-07.938	48	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	45.82	-	18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>1.804</i>		<i>0.734</i>	<i>1.250</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-048-060P-ALA-SET-08.000	48	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.82		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>1.804</i>		<i>0.732</i>	<i>1.252</i>
P-G3-048-090FF-PFR-NIL-06.000	48	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	45.82	51.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.804</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-048-090FF-PFR-AIS-06.000	48	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	45.82	51.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.804</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-048-090FF-PFR-NIL-06.350	48	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	45.82	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.804</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
P-G3-048-090FF-PFR-AIS-06.350	48	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.82	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.804</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-048-090FF-PFR-AIS-07.938	48	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.82	51.4	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.804</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-048-090P-ALA-FLC-07.938	48	9.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	45.82		22.23	25.40
		<i>0.354</i>	<i>0.313</i>				<i>1.804</i>		<i>0.875</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-048-090P-ALU-SET-07.938	48	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	45.82		22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>1.804</i>		<i>0.875</i>	<i>1.250</i>
# P-G3-048-090FF-PFR-AIS-08.000	48	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	45.82	51.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.804</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-048-090P-ALA-FLC-08.00	48	9.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	45.82	-	22.20	25.40
		<i>0.354</i>	<i>0.315</i>				<i>1.804</i>		<i>0.874</i>	<i>1.000</i>
# P-G3-048-090P-ALA-SET-08.000	48	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.82		22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>1.804</i>		<i>0.874</i>	<i>1.252</i>
P-G3-048-090FF-PFR-FLC-08.000	48	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	45.82	51.4	20.64	22.20
		<i>0.354</i>	<i>0.315</i>				<i>1.804</i>	<i>2.024</i>	<i>0.813</i>	<i>0.874</i>
P-G3-048-090FF-PFR-AIS-09.525	48	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.82	51.4	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.804</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-050-060P-ALU-SET-07.938	50	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	47.73		18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>1.879</i>		<i>0.734</i>	<i>1.250</i>
# P-G3-050-060P-ALA-SET-08.000	50	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.73		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>1.879</i>		<i>0.732</i>	<i>1.252</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-050-090P-ALA-FLC-07.938	50	9.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	47.73		22.23	25.40
		<i>0.354</i>	<i>0.313</i>				<i>1.879</i>		<i>0.875</i>	<i>1.000</i>
# P-G3-050-090P-ALU-SET-07.938	50	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	47.73		22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>1.879</i>		<i>0.875</i>	<i>1.250</i>
# P-G3-050-090P-ALA-SET-08.000	50	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.73		22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>1.879</i>		<i>0.874</i>	<i>1.252</i>
# P-G3-050-090P-ALA-FLC-08.00	50	9.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	47.73	-	22.20	25.40
		<i>0.354</i>	<i>0.315</i>				<i>1.879</i>		<i>0.874</i>	<i>1.000</i>
# P-G3-056-060P-ALU-SET-07.938	56	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	53.45		18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>2.104</i>		<i>0.734</i>	<i>1.250</i>
# P-G3-056-060P-ALA-SET-08.000	56	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	53.45		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>2.104</i>		<i>0.732</i>	<i>1.252</i>
# P-G3-056-090P-ALU-SET-07.938	56	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	53.45		22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>2.104</i>		<i>0.875</i>	<i>1.250</i>
# P-G3-056-090P-ALA-FLC-07.938	56	9.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	53.45		22.23	25.40
		<i>0.354</i>	<i>0.313</i>				<i>2.104</i>		<i>0.875</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-056-090P-ALA-FLC-08.00	56	9.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	53.45	-	22.20	25.40
		<i>0.354</i>	<i>0.315</i>				<i>2.104</i>		<i>0.874</i>	<i>1.000</i>
# P-G3-056-090P-ALA-SET-08.000	56	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	53.45		22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>2.104</i>		<i>0.874</i>	<i>1.252</i>
# P-G3-060-060P-ALU-SET-07.938	60	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	57.27		18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>2.255</i>		<i>0.734</i>	<i>1.250</i>
# P-G3-060-060P-ALA-SET-08.000	60	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>2.255</i>		<i>0.732</i>	<i>1.252</i>
# P-G3-060-090FF-PFR-NIL-07.938	60	9.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	57.27	62.5	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.255</i>	<i>2.461</i>	<i>0.875</i>	<i>0.875</i>
P-G3-060-090FF-PFR-AIS-07.938	60	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	57.27	62.5	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.255</i>	<i>2.461</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-060-090P-ALU-SET-07.938	60	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	57.27		22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>2.255</i>		<i>0.875</i>	<i>1.250</i>
# P-G3-060-090P-ALA-FLC-07.938	60	9.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	57.27		22.23	25.40
		<i>0.354</i>	<i>0.313</i>				<i>2.255</i>		<i>0.875</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-060-090P-ALA-SET-08.000	60	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>2.255</i>		<i>0.874</i>	<i>1.252</i>
# P-G3-060-090P-ALA-FLC-08.00	60	9.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	57.27	-	22.20	25.40
		<i>0.354</i>	<i>0.315</i>				<i>2.255</i>		<i>0.874</i>	<i>1.000</i>
# P-G3-060-090FF-PFR-NIL-08.000	60	9.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	57.27	63.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>2.255</i>	<i>2.480</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-060-090FF-PFR-AIS-08.000	60	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	57.27	63.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>2.255</i>	<i>2.480</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-060-090FF-PFR-AIS-09.525	60	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	57.27	62.5	22.23	22.23
		<i>0.354</i>	<i>0.375</i>				<i>2.255</i>	<i>2.461</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-060-090FF-PFR-AIS-10.000	60	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	57.27	63.0	22.20	22.00
		<i>0.354</i>	<i>0.394</i>				<i>2.255</i>	<i>2.480</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-060-090FF-PFR-AIS-12.000	60	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	57.27	63.0	22.20	22.00
		<i>0.354</i>	<i>0.472</i>				<i>2.255</i>	<i>2.480</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-060-090FF-PFR-AIS-12.700	60	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	57.27	62.5	22.23	22.23
		<i>0.354</i>	<i>0.500</i>				<i>2.255</i>	<i>2.461</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-062-060P-ALU-SET-07.938	62	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	59.18		18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>2.330</i>		<i>0.734</i>	<i>1.250</i>
# P-G3-062-060P-ALA-SET-08.000	62	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	59.18		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>2.330</i>		<i>0.732</i>	<i>1.252</i>
# P-G3-062-090P-ALU-SET-07.938	62	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	59.18		22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>2.330</i>		<i>0.875</i>	<i>1.250</i>
# P-G3-062-090P-ALA-SET-08.000	62	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	59.18		22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>2.330</i>		<i>0.874</i>	<i>1.252</i>
# P-G3-068-060P-ALU-SET-07.938	68	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	64.91		18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>2.556</i>		<i>0.734</i>	<i>1.250</i>
# P-G3-068-060P-ALA-SET-08.000	68	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	64.91		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>2.556</i>		<i>0.732</i>	<i>1.252</i>
# P-G3-068-090P-ALU-SET-07.938	68	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	64.91		22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>2.556</i>		<i>0.875</i>	<i>1.250</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-068-090P-ALA-SET-08.000	68	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	64.91		22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>2.556</i>		<i>0.874</i>	<i>1.252</i>
# P-G3-072-060P-ALU-SET-07.938	72	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	68.73		18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>2.706</i>		<i>0.734</i>	<i>1.250</i>
# P-G3-072-060P-ALA-SET-08.000	72	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	68.73		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>2.706</i>		<i>0.732</i>	<i>1.252</i>
# P-G3-072-090FF-PFR-AIS-07.938	72	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	68.73	74.2	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.706</i>	<i>2.921</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-072-090FF-PFR-NIL-07.938	72	9.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	68.73	74.2	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.706</i>	<i>2.921</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-072-090P-ALU-SET-07.938	72	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	68.73		22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>2.706</i>		<i>0.875</i>	<i>1.250</i>
# P-G3-072-090P-ALA-FLC-07.938	72	9.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	68.73		22.23	25.40
		<i>0.354</i>	<i>0.313</i>				<i>2.706</i>		<i>0.875</i>	<i>1.000</i>
# P-G3-072-090P-ALA-FLC-08.00	72	9.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	68.73	-	22.20	25.40
		<i>0.354</i>	<i>0.315</i>				<i>2.706</i>		<i>0.874</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-072-090FF-PFR-AIS-08.000	72	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	68.73	74.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>2.706</i>	<i>2.913</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-072-090P-ALA-SET-08.000	72	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	68.73		22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>2.706</i>		<i>0.874</i>	<i>1.252</i>
# P-G3-072-090FF-PFR-NIL-08.000	72	9.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	68.73	74.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>2.706</i>	<i>2.913</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-072-090FF-PFR-AIS-09.525	72	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	68.73	74.2	22.23	22.23
		<i>0.354</i>	<i>0.375</i>				<i>2.706</i>	<i>2.921</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-072-090FF-PFR-AIS-10.000	72	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	68.73	74.0	22.20	22.00
		<i>0.354</i>	<i>0.394</i>				<i>2.706</i>	<i>2.913</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-072-090FF-PFR-AIS-12.000	72	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	68.73	74.0	22.20	22.00
		<i>0.354</i>	<i>0.472</i>				<i>2.706</i>	<i>2.913</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-072-090FF-PFR-AIS-12.700	72	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	68.73	74.2	22.23	22.23
		<i>0.354</i>	<i>0.500</i>				<i>2.706</i>	<i>2.921</i>	<i>0.875</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-080-060P-ALU-SET-07.938	80	6.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	76.36		18.65	31.75
		<i>0.236</i>	<i>0.313</i>				<i>3.006</i>		<i>0.734</i>	<i>1.250</i>
# P-G3-080-060P-ALA-SET-08.000	80	6.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	76.36		18.60	31.80
		<i>0.236</i>	<i>0.315</i>				<i>3.006</i>		<i>0.732</i>	<i>1.252</i>
# P-G3-080-090FF-PFR-AIS-07.938	80	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	76.36	83.6	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.006</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-080-090P-ALU-SET-07.938	80	9.0	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	76.36		22.23	31.75
		<i>0.354</i>	<i>0.313</i>				<i>3.006</i>		<i>0.875</i>	<i>1.250</i>
# P-G3-080-090FF-PFR-NIL-07.938	80	9.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	76.36	83.6	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.006</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-080-090P-ALA-FLC-07.938	80	9.0	7.938	Aluminium, Clear Anodised	Fairloc Hub - tm-	P_FL_H (Unflanged)	76.36		22.23	25.40
		<i>0.354</i>	<i>0.313</i>				<i>3.006</i>		<i>0.875</i>	<i>1.000</i>
# P-G3-080-090FF-PFR-AIS-08.000	80	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	76.36	83.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>3.006</i>	<i>3.268</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-080-090P-ALA-SET-08.000	80	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	76.36		22.20	31.80
		<i>0.354</i>	<i>0.315</i>				<i>3.006</i>		<i>0.874</i>	<i>1.252</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-080-090FF-PFR-NIL-08.000	80	9.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	76.36	84.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>3.006</i>	<i>3.307</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-080-090P-ALA-FLC-08.00	80	9.0	8.000	Aluminium	Fairloc Hub - tm-	P_FL_H (Unflanged)	76.36	-	22.20	25.40
		<i>0.354</i>	<i>0.315</i>				<i>3.006</i>		<i>0.874</i>	<i>1.000</i>
# P-G3-080-090FF-PFR-AIS-09.525	80	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	76.36	83.6	22.23	22.23
		<i>0.354</i>	<i>0.375</i>				<i>3.006</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-080-090FF-PFR-AIS-10.000	80	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	76.36	83.0	22.20	22.00
		<i>0.354</i>	<i>0.394</i>				<i>3.006</i>	<i>3.268</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-080-090FF-PFR-AIS-12.000	80	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	76.36	83.0	22.20	22.00
		<i>0.354</i>	<i>0.472</i>				<i>3.006</i>	<i>3.268</i>	<i>0.874</i>	<i>0.866</i>
# P-G3-080-090FF-PFR-AIS-12.700	80	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	76.36	83.6	22.23	22.23
		<i>0.354</i>	<i>0.500</i>				<i>3.006</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-G3-084-090SF-PFR-AIS-07.938	84	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	80.18	85.9	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.157</i>	<i>3.382</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-084-090SF-PFR-AIS-08.000	84	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	80.18	86.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>3.157</i>	<i>3.386</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-084-090SF-PFR-AIS-09.525	84	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	80.18	85.9	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>3.157</i>	<i>3.382</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-084-090SF-PFR-AIS-10.000	84	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	80.18	86.0	20.60	22.00
		<i>0.354</i>	<i>0.394</i>				<i>3.157</i>	<i>3.386</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-084-090SF-PFR-AIS-12.000	84	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	80.18	86.0	20.60	22.00
		<i>0.354</i>	<i>0.472</i>				<i>3.157</i>	<i>3.386</i>	<i>0.811</i>	<i>0.866</i>
# P-G3-084-090SF-PFR-AIS-12.700	84	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	80.18	85.9	20.64	22.23
		<i>0.354</i>	<i>0.500</i>				<i>3.157</i>	<i>3.382</i>	<i>0.813</i>	<i>0.875</i>
# P-G3-096-090SF-PFR-AIS-07.938	96	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	91.64	97.3	20.64	25.40
		<i>0.354</i>	<i>0.313</i>				<i>3.608</i>	<i>3.831</i>	<i>0.813</i>	<i>1.000</i>
# P-G3-096-090SF-PFR-AIS-08.000	96	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	91.64	97.0	20.60	25.00
		<i>0.354</i>	<i>0.315</i>				<i>3.608</i>	<i>3.819</i>	<i>0.811</i>	<i>0.984</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-096-090SF-PFR-AIS-09.525	96	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	91.64	97.3	20.64	25.40
		<i>0.354</i>	<i>0.375</i>				<i>3.608</i>	<i>3.831</i>	<i>0.813</i>	<i>1.000</i>
# P-G3-096-090SF-PFR-AIS-10.000	96	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	91.64	97.0	20.60	25.00
		<i>0.354</i>	<i>0.394</i>				<i>3.608</i>	<i>3.819</i>	<i>0.811</i>	<i>0.984</i>
# P-G3-096-090SF-PFR-AIS-12.000	96	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	91.64	97.0	20.60	25.00
		<i>0.354</i>	<i>0.472</i>				<i>3.608</i>	<i>3.819</i>	<i>0.811</i>	<i>0.984</i>
# P-G3-096-090SF-PFR-AIS-12.700	96	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	91.64	97.3	20.64	25.40
		<i>0.354</i>	<i>0.500</i>				<i>3.608</i>	<i>3.831</i>	<i>0.813</i>	<i>1.000</i>
P-G3-120-090P-PFR-AIS-09.525	120	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	P_GI_HW (Unflanged)	114.55		22.23	25.40
		<i>0.354</i>	<i>0.375</i>				<i>4.510</i>		<i>0.875</i>	<i>1.000</i>
P-G3-120-090P-PFR-AIS-10.000	120	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	P_GI_HW (Unflanged)	114.55		22.20	25.00
		<i>0.354</i>	<i>0.394</i>				<i>4.510</i>		<i>0.874</i>	<i>0.984</i>
# P-G3-120-090P-PFR-AIS-12.000	120	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	P_GI_HW (Unflanged)	114.55		22.20	25.00
		<i>0.354</i>	<i>0.472</i>				<i>4.510</i>		<i>0.874</i>	<i>0.984</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 3.000mm Pitch - GT

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-G3-120-090P-PFR-AIS-12.700	120	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	P_GI_HW (Unflanged)	114.55		22.23	25.40
		<i>0.354</i>	<i>0.500</i>				<i>4.510</i>		<i>0.875</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au

