




# MBA

## Pulleys - Timing - 5.000mm Pitch - HTD

Timing Pulleys to suit HTD 5.000mm Pitch Timing Belts.

Various materials as shown.

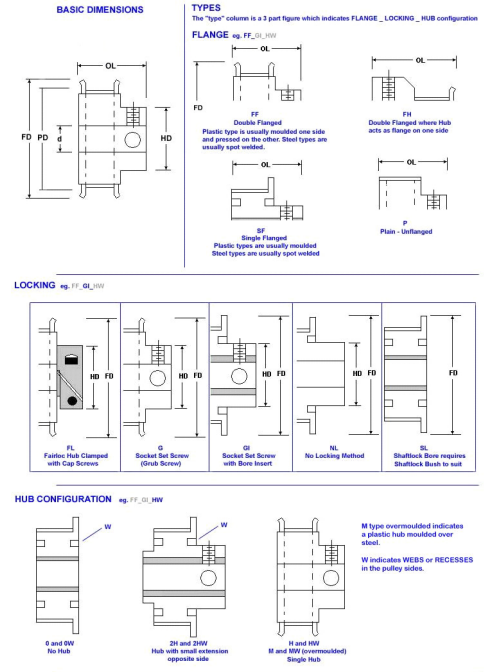

### Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-011-090SF-PFR-FLC-04.000	11	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	17.50	22.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-011-090FF-PFR-AIS-04.000	11	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.50	22.0	20.60	9.50
		<i>0.354</i>	<i>0.157</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.374</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-011-090SF-PFR-SET-04.000	11	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	17.50	22.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.500</i>
P-H5-011-090SF-PFR-NIL-04.000	11	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	17.50	22.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-011-090FF-PFR-FLC-04.000	11	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	17.50	22.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-011-090FF-PFR-NIL-04.000	11	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	17.50	22.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
P-H5-011-090SF-PFR-AIS-04.000	11	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	17.50	22.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-011-090FF-PFR-SET-04.000	11	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	17.50	22.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-011-090SF-PFR-NIL-04.763	11	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	17.50	23.0	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-011-090SF-PFR-ALS-04.763	11	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	17.50	23.0	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.500</i>
# P-H5-011-090SF-PFR-AIS-04.763	11	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	17.50	23.0	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-011-090FF-PFR-AIS-04.763	11	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	17.50	23.0	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-011-090FF-PFR-FLC-04.763	11	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	17.50	23.0	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.500</i>
# P-H5-011-090SF-PFR-FLC-04.763	11	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	17.50	23.0	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.500</i>
# P-H5-011-090FF-PFR-NIL-04.763	11	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	17.50	23.0	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-011-090FF-PFR-ALS-04.763	11	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	17.50	23.0	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-011-090FF-PFR-AIS-05.000	11	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.50	22.0	20.60	9.50
		<i>0.354</i>	<i>0.197</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-011-090SF-PFR-AIS-05.000	11	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	17.50	22.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
P-H5-011-090FF-PFR-AIS-06.000	11	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.50	22.0	20.60	9.50
		<i>0.354</i>	<i>0.236</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-011-090SF-PFR-AIS-06.000	11	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	17.50	22.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.689</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
P-H5-011-090FF-PFR-AIS-06.350	11	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	17.50	23.0	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-011-090SF-PFR-AIS-06.350	11	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	17.50	23.0	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.689</i>	<i>0.906</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-012-090SF-PFR-NIL-04.000	12	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-012-090FF-PFR-SET-04.000	12	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	19.09	24.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-012-090FF-PFR-AIS-04.000	12	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.09	24.0	20.60	9.50
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-012-090FF-PFR-NIL-04.000	12	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-012-090SF-PFR-SET-04.000	12	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	19.09	24.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-012-090SF-PFR-FLC-04.000	12	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	19.09	24.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-012-090SF-PFR-AIS-04.000	12	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-012-090FF-PFR-FLC-04.000	12	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	19.09	24.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-012-090SF-PFR-AIS-04.763	12	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-012-090SF-PFR-ALS-04.763	12	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	19.09	23.6	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.500</i>
# P-H5-012-090SF-PFR-NIL-04.763	12	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-012-090SF-PFR-FLC-04.763	12	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	19.09	23.6	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.500</i>
# P-H5-012-090FF-PFR-NIL-04.763	12	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-012-090FF-PFR-FLC-04.763	12	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	19.09	23.6	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.500</i>
# P-H5-012-090FF-PFR-ALS-04.763	12	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	19.09	23.6	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-H5-012-090FF-PFR-AIS-04.763	12	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-012-090SF-PFR-AIS-05.000	12	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-012-090FF-PFR-AIS-05.000	12	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.09	24.0	20.60	9.50
		<i>0.354</i>	<i>0.197</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-012-090P-ALA-SET-06.000	12	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	19.09		20.20	11.10
		<i>0.354</i>	<i>0.236</i>				<i>0.752</i>		<i>0.795</i>	<i>0.437</i>
# P-H5-012-090SF-PFR-AIS-06.000	12	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	19.09	24.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-012-090FF-PFR-AIS-06.000	12	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.09	24.0	20.60	9.50
		<i>0.354</i>	<i>0.236</i>				<i>0.752</i>	<i>0.945</i>	<i>0.811</i>	<i>0.374</i>
P-H5-012-090FF-ALA-SET-06.000	12	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	22.2	20.20	11.10
		<i>0.354</i>	<i>0.236</i>				<i>0.752</i>	<i>0.874</i>	<i>0.795</i>	<i>0.437</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-012-090P-ALA-SET-06.350	12	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	19.09		20.24	11.11
		<i>0.354</i>	<i>0.250</i>				<i>0.752</i>		<i>0.797</i>	<i>0.437</i>
# P-H5-012-090SF-PFR-AIS-06.350	12	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-012-090FF-PFR-AIS-06.350	12	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	19.09	23.6	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.752</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-012-090FF-ALA-SET-06.350	12	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	22.2	20.24	11.11
		<i>0.354</i>	<i>0.250</i>				<i>0.752</i>	<i>0.874</i>	<i>0.797</i>	<i>0.437</i>
# P-H5-012-150P-ALA-SET-06.000	12	15.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	19.09		26.20	11.10
		<i>0.591</i>	<i>0.236</i>				<i>0.752</i>		<i>1.031</i>	<i>0.437</i>
# P-H5-012-150FF-ALA-SET-06.000	12	15.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	22.2	26.20	11.10
		<i>0.591</i>	<i>0.236</i>				<i>0.752</i>	<i>0.874</i>	<i>1.031</i>	<i>0.437</i>
# P-H5-012-150P-ALA-SET-06.350	12	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	19.09		27.78	11.11
		<i>0.591</i>	<i>0.250</i>				<i>0.752</i>		<i>1.094</i>	<i>0.437</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-H5-012-150FF-ALA-SET-06.350	12	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.09	22.2	26.19	11.11
		<i>0.591</i>	<i>0.250</i>				<i>0.752</i>	<i>0.874</i>	<i>1.031</i>	<i>0.437</i>
# P-H5-012-150FF-NFR-AIS-06.363	12	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	19.09	23.0	11.11	19.50
		<i>0.591</i>	<i>0.251</i>				<i>0.752</i>	<i>0.906</i>	<i>0.437</i>	<i>0.768</i>
# P-H5-012-150SF-NFR-AIS-06.363	12	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	19.09	23.0	11.11	19.50
		<i>0.591</i>	<i>0.251</i>				<i>0.752</i>	<i>0.906</i>	<i>0.437</i>	<i>0.768</i>
# P-H5-013-090FF-PFR-FLC-04.000	13	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	20.68	25.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-013-090SF-PFR-SET-04.000	13	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	20.68	25.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-013-090FF-PFR-AIS-04.000	13	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	20.68	25.0	20.60	9.50
		<i>0.354</i>	<i>0.157</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-013-090SF-PFR-AIS-04.000	13	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	20.68	25.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-013-090SF-PFR-NIL-04.000	13	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	20.68	25.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-013-090SF-PFR-FLC-04.000	13	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	20.68	25.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-013-090FF-PFR-SET-04.000	13	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	20.68	25.0	20.60	12.70
		<i>0.354</i>	<i>0.157</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.500</i>
# P-H5-013-090FF-PFR-NIL-04.000	13	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	20.68	25.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-013-090SF-PFR-AIS-04.763	13	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	20.68	25.1	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-013-090FF-PFR-NIL-04.763	13	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	20.68	25.1	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-013-090FF-PFR-FLC-04.763	13	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	20.68	25.1	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-013-090SF-PFR-FLC-04.763	13	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	20.68	25.1	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.500</i>
# P-H5-013-090SF-PFR-ALS-04.763	13	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	20.68	25.1	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.500</i>
# P-H5-013-090FF-PFR-AIS-04.763	13	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	20.68	25.1	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-013-090SF-PFR-NIL-04.763	13	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	20.68	25.1	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-013-090FF-PFR-ALS-04.763	13	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	20.68	25.1	20.64	12.70
		<i>0.354</i>	<i>0.188</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.500</i>
P-H5-013-090FF-PFR-AIS-05.000	13	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	20.68	25.0	20.60	9.50
		<i>0.354</i>	<i>0.197</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-013-090SF-PFR-AIS-05.000	13	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	20.68	25.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-013-090SF-PFR-AIS-06.000	13	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	20.68	25.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-013-090P-ALA-SET-06.000	13	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	20.68		20.20	12.70
		<i>0.354</i>	<i>0.236</i>				<i>0.814</i>		<i>0.795</i>	<i>0.500</i>
P-H5-013-090FF-PFR-AIS-06.000	13	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	20.68	25.0	20.60	9.50
		<i>0.354</i>	<i>0.236</i>				<i>0.814</i>	<i>0.984</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-013-090FF-ALA-SET-06.000	13	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.68	23.8	20.20	12.70
		<i>0.354</i>	<i>0.236</i>				<i>0.814</i>	<i>0.937</i>	<i>0.795</i>	<i>0.500</i>
# P-H5-013-090P-ALA-SET-06.350	13	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	20.68		20.24	12.70
		<i>0.354</i>	<i>0.250</i>				<i>0.814</i>		<i>0.797</i>	<i>0.500</i>
# P-H5-013-090FF-PFR-AIS-06.350	13	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	20.68	25.1	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
P-H5-013-090FF-ALA-SET-06.350	13	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.68	23.8	20.24	12.70
		<i>0.354</i>	<i>0.250</i>				<i>0.814</i>	<i>0.937</i>	<i>0.797</i>	<i>0.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-013-090SF-PFR-AIS-06.350	13	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	20.68	25.1	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.814</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-013-150FF-ALA-SET-06.000	13	15.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.68	23.8	26.20	12.70
		<i>0.591</i>	<i>0.236</i>				<i>0.814</i>	<i>0.937</i>	<i>1.031</i>	<i>0.500</i>
# P-H5-013-150P-ALA-SET-06.000	13	15.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	20.68		26.20	12.70
		<i>0.591</i>	<i>0.236</i>				<i>0.814</i>		<i>1.031</i>	<i>0.500</i>
# P-H5-013-150P-ALA-SET-06.350	13	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	20.68		27.78	12.70
		<i>0.591</i>	<i>0.250</i>				<i>0.814</i>		<i>1.094</i>	<i>0.500</i>
# P-H5-013-150FF-ALA-SET-06.350	13	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	20.68	23.8	26.19	12.70
		<i>0.591</i>	<i>0.250</i>				<i>0.814</i>	<i>0.937</i>	<i>1.031</i>	<i>0.500</i>
# P-H5-014-090SF-PFR-NIL-04.000	14	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	22.27	27.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-014-090SF-PFR-AIS-04.000	14	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	22.27	27.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-014-090FF-PFR-AIS-04.000	14	9.0	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	22.27	27.0	20.60	9.50
		<i>0.354</i>	<i>0.157</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-014-090FF-PFR-NIL-04.000	14	9.0	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	22.27	27.0	20.60	17.50
		<i>0.354</i>	<i>0.157</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-014-090FF-PFR-NIL-04.763	14	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	22.27	26.9	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-014-090SF-PFR-AIS-04.763	14	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	22.27	26.9	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-014-090FF-PFR-AIS-04.763	14	9.0	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	22.27	26.9	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-014-090SF-PFR-NIL-04.763	14	9.0	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	22.27	26.9	20.64	17.46
		<i>0.354</i>	<i>0.188</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-014-090SF-PFR-AIS-05.000	14	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	22.27	27.0	20.60	17.50
		<i>0.354</i>	<i>0.197</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-H5-014-090FF-PFR-AIS-05.000	14	9.0	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	22.27	27.0	20.60	9.50
		<i>0.354</i>	<i>0.197</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-014-090SF-PFR-FLC-06.000	14	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	22.27	27.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-014-090SF-PFR-AIS-06.000	14	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	22.27	27.0	20.60	17.50
		<i>0.354</i>	<i>0.236</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-H5-014-090SF-PFR-SET-06.000	14	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	22.27	27.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-014-090FF-PFR-SET-06.000	14	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	22.27	27.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-014-090FF-ALA-SET-06.000	14	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.27	25.4	20.20	12.70
		<i>0.354</i>	<i>0.236</i>				<i>0.877</i>	<i>1.000</i>	<i>0.795</i>	<i>0.500</i>
# P-H5-014-090FF-PFR-FLC-06.000	14	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	22.27	27.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.752</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-014-090P-ALA-SET-06.000	14	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	22.27		20.20	12.70
		<i>0.354</i>	<i>0.236</i>				<i>0.877</i>		<i>0.795</i>	<i>0.500</i>
# P-H5-014-090FF-PFR-AIS-06.000	14	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	22.27	27.0	20.60	9.50
		<i>0.354</i>	<i>0.236</i>				<i>0.877</i>	<i>1.063</i>	<i>0.811</i>	<i>0.374</i>
# P-H5-014-090SF-PFR-ALS-06.350	14	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	22.27	26.9	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-014-090FF-ALA-SET-06.350	14	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.27	25.4	20.24	12.70
		<i>0.354</i>	<i>0.250</i>				<i>0.877</i>	<i>1.000</i>	<i>0.797</i>	<i>0.500</i>
# P-H5-014-090FF-PFR-AIS-06.350	14	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	22.27	26.9	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-014-090SF-PFR-AIS-06.350	14	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	22.27	26.9	20.64	17.46
		<i>0.354</i>	<i>0.250</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-H5-014-090FF-PFR-ALS-06.350	14	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	22.27	26.9	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-014-090FF-PFR-FLC-06.350	14	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	22.27	26.9	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-014-090P-ALA-SET-06.350	14	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	22.27		20.24	12.70
		<i>0.354</i>	<i>0.250</i>				<i>0.877</i>		<i>0.797</i>	<i>0.500</i>
# P-H5-014-090SF-PFR-FLC-06.350	14	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	22.27	26.9	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.877</i>	<i>1.059</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-014-150P-ALA-SET-06.000	14	15.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	22.27		26.20	12.70
		<i>0.591</i>	<i>0.236</i>				<i>0.877</i>		<i>1.031</i>	<i>0.500</i>
# P-H5-014-150FF-ALA-SET-06.000	14	15.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.27	25.4	26.20	12.70
		<i>0.591</i>	<i>0.236</i>				<i>0.877</i>	<i>1.000</i>	<i>1.031</i>	<i>0.500</i>
# P-H5-014-150P-ALA-SET-06.350	14	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	22.27		27.78	12.70
		<i>0.591</i>	<i>0.250</i>				<i>0.877</i>		<i>1.094</i>	<i>0.500</i>
# P-H5-014-150FF-ALA-SET-06.350	14	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.27	25.4	26.19	12.70
		<i>0.591</i>	<i>0.250</i>				<i>0.877</i>	<i>1.000</i>	<i>1.031</i>	<i>0.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-014-150SF-NFR-AIS-06.363	14	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	22.27	25.4	14.29	19.50
		<i>0.591</i>	<i>0.251</i>				<i>0.877</i>	<i>1.000</i>	<i>0.563</i>	<i>0.768</i>
# P-H5-014-150FF-NFR-AIS-06.363	14	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	22.27	25.4	14.29	19.50
		<i>0.591</i>	<i>0.251</i>				<i>0.877</i>	<i>1.000</i>	<i>0.563</i>	<i>0.768</i>
# P-H5-015-090SF-PFR-FLC-06.000	15	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	23.86	30.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-015-090P-ALA-SET-06.000	15	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	23.86		20.20	14.30
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>		<i>0.795</i>	<i>0.563</i>
# P-H5-015-090FF-ALA-SET-06.000	15	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	23.86	27.0	20.20	14.30
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.063</i>	<i>0.795</i>	<i>0.563</i>
P-H5-015-090FF-PFR-SET-06.000	15	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	23.86	30.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-015-090FF-PFR-AIS-06.000	15	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	23.86	30.0	20.60	13.00
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.512</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-015-090SF-PFR-NIL-06.000	15	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	23.86	30.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-015-090SF-PFR-AIS-06.000	15	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	23.86	30.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-015-090SF-PFR-SET-06.000	15	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	23.86	30.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-015-090FF-PFR-FLC-06.000	15	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	23.86	30.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-015-090FF-PFR-NIL-06.000	15	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	23.86	30.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-015-090SF-PFR-AIS-06.350	15	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090SF-PFR-FLC-06.350	15	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-015-090SF-PFR-NIL-06.350	15	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090SF-PFR-ALS-06.350	15	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090FF-PFR-NIL-06.350	15	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090FF-PFR-FLC-06.350	15	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090FF-PFR-ALS-06.350	15	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090FF-PFR-AIS-06.350	15	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090FF-ALA-SET-06.350	15	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	23.86	27.0	20.24	14.29
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>	<i>1.063</i>	<i>0.797</i>	<i>0.563</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-015-090P-ALA-SET-06.350	15	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	23.86		20.24	14.29
		<i>0.354</i>	<i>0.250</i>				<i>0.939</i>		<i>0.797</i>	<i>0.563</i>
# P-H5-015-090FF-PFR-AIS-07.938	15	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090SF-PFR-AIS-07.938	15	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-015-090SF-PFR-AIS-08.000	15	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	23.86	30.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-015-090FF-PFR-AIS-08.000	15	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	23.86	30.0	20.60	13.00
		<i>0.354</i>	<i>0.315</i>				<i>0.939</i>	<i>1.181</i>	<i>0.811</i>	<i>0.512</i>
# P-H5-015-090SF-PFR-AIS-09.525	15	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
P-H5-015-090FF-PFR-AIS-09.525	15	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	23.86	30.2	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>0.939</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-H5-015-150FF-ALA-SET-06.000	15	15.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	23.86	27.0	26.20	14.30
		<i>0.591</i>	<i>0.236</i>				<i>0.939</i>	<i>1.063</i>	<i>1.031</i>	<i>0.563</i>
# P-H5-015-150P-ALA-SET-06.000	15	15.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	23.86		26.20	14.30
		<i>0.591</i>	<i>0.236</i>				<i>0.939</i>		<i>1.031</i>	<i>0.563</i>
# P-H5-015-150P-ALA-SET-06.350	15	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	23.86		27.78	14.29
		<i>0.591</i>	<i>0.250</i>				<i>0.939</i>		<i>1.094</i>	<i>0.563</i>
# P-H5-015-150FF-ALA-SET-06.350	15	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	23.86	27.0	26.19	14.29
		<i>0.591</i>	<i>0.250</i>				<i>0.939</i>	<i>1.063</i>	<i>1.031</i>	<i>0.563</i>
# P-H5-015-150SF-NFR-AIS-06.363	15	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	23.86	26.9	16.67	22.23
		<i>0.591</i>	<i>0.251</i>				<i>0.939</i>	<i>1.059</i>	<i>0.656</i>	<i>0.875</i>
# P-H5-015-150FF-NFR-AIS-06.363	15	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	23.86	26.9	16.67	22.23
		<i>0.591</i>	<i>0.251</i>				<i>0.939</i>	<i>1.059</i>	<i>0.656</i>	<i>0.875</i>
# P-H5-016-090FF-PFR-FLC-06.000	16	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	25.45	30.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.752</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-016-090FF-ALA-SET-06.000	16	9.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	27.8	20.20	14.30
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.094</i>	<i>0.795</i>	<i>0.563</i>
# P-H5-016-090SF-PFR-NIL-06.000	16	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	25.45	30.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-016-090SF-PFR-FLC-06.000	16	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	25.45	30.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-016-090SF-PFR-AIS-06.000	16	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	25.45	30.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-016-090P-ALA-SET-06.000	16	9.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	25.45		20.20	14.30
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>		<i>0.795</i>	<i>0.563</i>
# P-H5-016-090FF-PFR-SET-06.000	16	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	25.45	30.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-016-090FF-PFR-NIL-06.000	16	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	25.45	30.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-016-090SF-PFR-SET-06.000	16	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	25.45	30.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.752</i>
P-H5-016-090FF-PFR-AIS-06.000	16	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	25.45	30.0	20.60	13.00
		<i>0.354</i>	<i>0.236</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.512</i>
# P-H5-016-090FF-PFR-ALS-06.350	16	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090FF-PFR-FLC-06.350	16	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090SF-PFR-NIL-06.350	16	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090FF-PFR-NIL-06.350	16	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090SF-PFR-AIS-06.350	16	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-016-090P-ALA-SET-06.350	16	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	25.45		20.24	14.29
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>		<i>0.797</i>	<i>0.563</i>
# P-H5-016-090FF-PFR-AIS-06.350	16	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090SF-PFR-FLC-06.350	16	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090SF-PFR-ALS-06.350	16	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090FF-ALA-SET-06.350	16	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	27.8	20.24	14.29
		<i>0.354</i>	<i>0.250</i>				<i>1.002</i>	<i>1.094</i>	<i>0.797</i>	<i>0.563</i>
# P-H5-016-090FF-PFR-AIS-07.938	16	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090SF-PFR-AIS-07.938	16	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-016-090SF-PFR-AIS-08.000	16	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	25.45	30.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-016-090FF-PFR-AIS-08.000	16	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	25.45	30.0	20.60	13.00
		<i>0.354</i>	<i>0.315</i>				<i>1.002</i>	<i>1.181</i>	<i>0.811</i>	<i>0.512</i>
# P-H5-016-090SF-PFR-AIS-09.525	16	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-090FF-PFR-AIS-09.525	16	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	25.45	30.2	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.002</i>	<i>1.189</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-016-150FF-ALA-SET-06.000	16	15.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	27.8	26.20	14.30
		<i>0.591</i>	<i>0.236</i>				<i>1.002</i>	<i>1.094</i>	<i>1.031</i>	<i>0.563</i>
# P-H5-016-150P-ALA-SET-06.000	16	15.0	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	25.45		26.20	14.30
		<i>0.591</i>	<i>0.236</i>				<i>1.002</i>		<i>1.031</i>	<i>0.563</i>
# P-H5-016-150FF-ALA-SET-06.350	16	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.45	27.8	26.19	14.29
		<i>0.591</i>	<i>0.250</i>				<i>1.002</i>	<i>1.094</i>	<i>1.031</i>	<i>0.563</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-016-150P-ALA-SET-06.350	16	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	25.45		27.78	14.29
		<i>0.591</i>	<i>0.250</i>				<i>1.002</i>		<i>1.094</i>	<i>0.563</i>
# P-H5-016-150SF-NFR-AIS-06.363	16	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	25.45	27.7	16.67	22.23
		<i>0.591</i>	<i>0.251</i>				<i>1.002</i>	<i>1.091</i>	<i>0.656</i>	<i>0.875</i>
# P-H5-016-150FF-NFR-AIS-06.363	16	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	25.45	27.7	16.67	22.23
		<i>0.591</i>	<i>0.251</i>				<i>1.002</i>	<i>1.091</i>	<i>0.656</i>	<i>0.875</i>
# P-H5-017-090SF-PFR-AIS-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	27.05	32.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-017-090FF-PFR-SET-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	27.05	32.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-017-090FF-PFR-AIS-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	27.05	32.0	20.60	13.00
		<i>0.354</i>	<i>0.236</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.512</i>
# P-H5-017-090SF-PFR-NIL-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	27.05	32.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-017-090SF-PFR-FLC-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	27.05	32.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-017-090FF-PFR-FLC-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	27.05	32.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-017-090FF-PFR-NIL-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	27.05	32.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-017-090SF-PFR-SET-06.000	17	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	27.05	32.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-017-090SF-PFR-NIL-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-017-090SF-PFR-FLC-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-017-090SF-PFR-ALS-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-017-090SF-PFR-AIS-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-017-090P-ALA-SET-06.350	17	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	27.05		20.24	15.88
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>		<i>0.797</i>	<i>0.625</i>
# P-H5-017-090FF-ALA-SET-06.350	17	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	27.05	30.2	20.24	15.88
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.189</i>	<i>0.797</i>	<i>0.625</i>
# P-H5-017-090FF-PFR-FLC-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-017-090FF-PFR-ALS-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
P-H5-017-090FF-PFR-AIS-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-017-090FF-PFR-NIL-06.350	17	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-017-090SF-PFR-AIS-07.938	17	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-017-090FF-PFR-AIS-07.938	17	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-017-090P-ALA-SET-08.000	17	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	27.05		20.20	15.90
		<i>0.354</i>	<i>0.315</i>				<i>1.065</i>		<i>0.795</i>	<i>0.626</i>
# P-H5-017-090SF-PFR-AIS-08.000	17	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	27.05	32.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-017-090FF-PFR-AIS-08.000	17	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	27.05	32.0	20.60	13.00
		<i>0.354</i>	<i>0.315</i>				<i>1.065</i>	<i>1.260</i>	<i>0.811</i>	<i>0.512</i>
# P-H5-017-090FF-ALA-SET-08.000	17	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	27.05	30.2	20.20	15.90
		<i>0.354</i>	<i>0.315</i>				<i>1.065</i>	<i>1.189</i>	<i>0.795</i>	<i>0.626</i>
# P-H5-017-090SF-PFR-AIS-09.525	17	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-017-090FF-PFR-AIS-09.525	17	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	27.05	31.5	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.065</i>	<i>1.240</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-017-150P-ALA-SET-06.350	17	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	27.05		27.78	15.88
		<i>0.591</i>	<i>0.250</i>				<i>1.065</i>		<i>1.094</i>	<i>0.625</i>
# P-H5-017-150FF-ALA-SET-06.350	17	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	27.05	30.2	26.19	15.88
		<i>0.591</i>	<i>0.250</i>				<i>1.065</i>	<i>1.189</i>	<i>1.031</i>	<i>0.625</i>
P-H5-017-150FF-ALA-SET-08.000	17	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	27.05	30.2	26.20	15.90
		<i>0.591</i>	<i>0.315</i>				<i>1.065</i>	<i>1.189</i>	<i>1.031</i>	<i>0.626</i>
# P-H5-017-150P-ALA-SET-08.000	17	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	27.05		26.20	15.90
		<i>0.591</i>	<i>0.315</i>				<i>1.065</i>		<i>1.031</i>	<i>0.626</i>
# P-H5-018-090FF-PFR-SET-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	28.64	33.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.752</i>
P-H5-018-090FF-PFR-AIS-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	28.64	33.0	20.60	13.00
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.512</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-018-090SF-PFR-SET-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	28.64	33.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-018-090SF-PFR-NIL-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	28.64	33.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-018-090SF-PFR-FLC-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	28.64	33.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-018-090FF-PFR-FLC-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	28.64	33.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-018-090SF-PFR-AIS-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	28.64	33.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>
P-H5-018-090FF-PFR-NIL-06.000	18	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	28.64	33.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-018-090SF-PFR-NIL-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-018-090SF-PFR-FLC-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090SF-PFR-ALS-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090SF-PFR-AIS-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090P-ALA-SET-06.350	18	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	28.64		20.24	17.46
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>		<i>0.797</i>	<i>0.687</i>
# P-H5-018-090FF-PFR-FLC-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090FF-PFR-ALS-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090FF-ALA-SET-06.350	18	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	31.8	20.24	17.46
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.252</i>	<i>0.797</i>	<i>0.687</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-018-090FF-PFR-AIS-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090FF-PFR-NIL-06.350	18	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090FF-PFR-AIS-07.938	18	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090SF-PFR-AIS-07.938	18	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090FF-ALA-SET-08.000	18	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	31.8	20.20	17.50
		<i>0.354</i>	<i>0.315</i>				<i>1.128</i>	<i>1.252</i>	<i>0.795</i>	<i>0.689</i>
# P-H5-018-090FF-PFR-AIS-08.000	18	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	28.64	33.0	20.60	13.00
		<i>0.354</i>	<i>0.315</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.512</i>
# P-H5-018-090SF-PFR-AIS-08.000	18	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	28.64	33.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>1.128</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-018-090P-ALA-SET-08.000	18	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	28.64		20.20	17.50
		<i>0.354</i>	<i>0.315</i>				<i>1.128</i>		<i>0.795</i>	<i>0.689</i>
# P-H5-018-090SF-PFR-AIS-09.525	18	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-090FF-PFR-AIS-09.525	18	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	28.64	33.3	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.128</i>	<i>1.311</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-018-150P-ALA-SET-06.350	18	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	28.64		27.78	17.46
		<i>0.591</i>	<i>0.250</i>				<i>1.128</i>		<i>1.094</i>	<i>0.687</i>
# P-H5-018-150FF-ALA-SET-06.350	18	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	31.8	26.19	17.46
		<i>0.591</i>	<i>0.250</i>				<i>1.128</i>	<i>1.252</i>	<i>1.031</i>	<i>0.687</i>
# P-H5-018-150SF-NFR-AIS-06.363	18	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	28.64	31.8	22.23	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.128</i>	<i>1.252</i>	<i>0.875</i>	<i>1.250</i>
# P-H5-018-150FF-NFR-AIS-06.363	18	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	28.64	31.8	22.23	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.128</i>	<i>1.252</i>	<i>0.875</i>	<i>1.250</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-018-150FF-ALA-SET-08.000	18	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	28.64	31.8	26.20	17.50
		<i>0.591</i>	<i>0.315</i>				<i>1.128</i>	<i>1.252</i>	<i>1.031</i>	<i>0.689</i>
# P-H5-018-150P-ALA-SET-08.000	18	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	28.64		26.20	17.50
		<i>0.591</i>	<i>0.315</i>				<i>1.128</i>		<i>1.031</i>	<i>0.689</i>
# P-H5-019-090SF-PFR-FLC-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	30.23	35.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-019-090FF-PFR-NIL-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	30.23	35.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-019-090SF-PFR-AIS-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	30.23	35.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-019-090SF-PFR-SET-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_M (Single Flange)	30.23	35.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-019-090FF-PFR-FLC-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	30.23	35.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.752</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-019-090FF-PFR-AIS-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	30.23	35.0	20.60	13.00
		<i>0.354</i>	<i>0.236</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.512</i>
# P-H5-019-090SF-PFR-NIL-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	30.23	35.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-019-090FF-PFR-SET-06.000	19	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_M (Double Flange)	30.23	35.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-019-090SF-PFR-FLC-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090SF-PFR-AIS-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090SF-PFR-NIL-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090P-ALA-SET-06.350	19	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	30.23		20.24	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>		<i>0.797</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-019-090SF-PFR-ALS-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090FF-PFR-AIS-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090FF-PFR-NIL-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090FF-PFR-FLC-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090FF-PFR-ALS-06.350	19	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090FF-ALA-SET-06.350	19	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.23	33.3	20.24	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.190</i>	<i>1.311</i>	<i>0.797</i>	<i>0.768</i>
# P-H5-019-090FF-PFR-AIS-07.938	19	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-019-090SF-PFR-AIS-07.938	19	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-019-090SF-PFR-AIS-08.000	19	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	30.23	35.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-019-090FF-ALA-SET-08.000	19	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.23	33.3	20.20	19.10
		<i>0.354</i>	<i>0.315</i>				<i>1.190</i>	<i>1.311</i>	<i>0.795</i>	<i>0.752</i>
# P-H5-019-090P-ALA-SET-08.000	19	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	30.23		20.20	19.10
		<i>0.354</i>	<i>0.315</i>				<i>1.190</i>		<i>0.795</i>	<i>0.752</i>
# P-H5-019-090FF-PFR-AIS-08.000	19	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	30.23	35.0	20.60	13.00
		<i>0.354</i>	<i>0.315</i>				<i>1.190</i>	<i>1.378</i>	<i>0.811</i>	<i>0.512</i>
# P-H5-019-090SF-PFR-AIS-09.525	19	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>
P-H5-019-090FF-PFR-AIS-09.525	19	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	30.23	35.5	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.190</i>	<i>1.398</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-019-150P-ALA-SET-06.350	19	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	30.23		27.78	19.50
		<i>0.591</i>	<i>0.250</i>				<i>1.190</i>		<i>1.094</i>	<i>0.768</i>
# P-H5-019-150FF-ALA-SET-06.350	19	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.23	33.3	26.19	19.50
		<i>0.591</i>	<i>0.250</i>				<i>1.190</i>	<i>1.311</i>	<i>1.031</i>	<i>0.768</i>
# P-H5-019-150SF-NFR-AIS-06.363	19	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	30.23	33.5	22.23	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.190</i>	<i>1.319</i>	<i>0.875</i>	<i>1.250</i>
# P-H5-019-150FF-NFR-AIS-06.363	19	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	30.23	33.5	22.23	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.190</i>	<i>1.319</i>	<i>0.875</i>	<i>1.250</i>
# P-H5-019-150P-ALA-SET-08.000	19	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	30.23		26.20	19.10
		<i>0.591</i>	<i>0.315</i>				<i>1.190</i>		<i>1.031</i>	<i>0.752</i>
# P-H5-019-150FF-ALA-SET-08.000	19	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.23	33.3	26.20	19.10
		<i>0.591</i>	<i>0.315</i>				<i>1.190</i>	<i>1.311</i>	<i>1.031</i>	<i>0.752</i>
# P-H5-019-150SF-NFR-SLC-15.875	19	15.0	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	30.23	33.3	17.78	
		<i>0.591</i>	<i>0.625</i>				<i>1.190</i>	<i>1.311</i>	<i>0.700</i>	

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-019-150FF-NFR-SLC-15.875	19	15.0	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	30.23	33.3	19.50	
		<i>0.591</i>	<i>0.625</i>				<i>1.190</i>	<i>1.311</i>	<i>0.768</i>	
# P-H5-020-090SF-PFR-FLC-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub -tm-	SF_FL_HW (Single Flange)	31.82	37.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-020-090FF-PFR-SET-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	31.82	37.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-020-090SF-PFR-AIS-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	31.82	37.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-020-090SF-PFR-NIL-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	31.82	37.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-020-090FF-PFR-AIS-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	31.82	37.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-020-090FF-PFR-NIL-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	31.82	37.0	20.60	19.00
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-020-090SF-PFR-SET-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	31.82	37.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-020-090FF-PFR-FLC-06.000	20	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	31.82	37.0	20.60	19.10
		<i>0.354</i>	<i>0.236</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.752</i>
# P-H5-020-090P-ALA-SET-06.350	20	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	31.82		20.24	2.64
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>		<i>0.797</i>	<i>0.104</i>
# P-H5-020-090SF-PFR-AIS-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090SF-PFR-FLC-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090SF-PFR-NIL-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090SF-PFR-ALS-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-020-090FF-PFR-FLC-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090FF-PFR-ALS-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090FF-ALA-SET-06.350	20	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	34.9	20.24	20.64
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.374</i>	<i>0.797</i>	<i>0.813</i>
# P-H5-020-090FF-PFR-NIL-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090FF-PFR-AIS-06.350	20	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.250</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090SF-PFR-AIS-07.938	20	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090FF-PFR-AIS-07.938	20	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.313</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-H5-020-090P-ALA-SET-08.000	20	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	31.82		20.20	20.60
		<i>0.354</i>	<i>0.315</i>				<i>1.253</i>		<i>0.795</i>	<i>0.811</i>
# P-H5-020-090SF-PFR-AIS-08.000	20	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	31.82	37.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-020-090FF-PFR-AIS-08.000	20	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	31.82	37.0	20.60	19.00
		<i>0.354</i>	<i>0.315</i>				<i>1.253</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-H5-020-090FF-ALA-SET-08.000	20	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	34.9	20.20	20.60
		<i>0.354</i>	<i>0.315</i>				<i>1.253</i>	<i>1.374</i>	<i>0.795</i>	<i>0.811</i>
P-H5-020-090FF-PFR-AIS-09.525	20	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-090SF-PFR-AIS-09.525	20	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	31.82	36.6	20.64	19.50
		<i>0.354</i>	<i>0.375</i>				<i>1.253</i>	<i>1.441</i>	<i>0.813</i>	<i>0.768</i>
# P-H5-020-150P-ALA-SET-06.350	20	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	31.82		27.78	2.64
		<i>0.591</i>	<i>0.250</i>				<i>1.253</i>		<i>1.094</i>	<i>0.104</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-020-150FF-ALA-SET-06.350	20	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	34.9	26.19	20.64
		<i>0.591</i>	<i>0.250</i>				<i>1.253</i>	<i>1.374</i>	<i>1.031</i>	<i>0.813</i>
# P-H5-020-150SF-NFR-AIS-06.363	20	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	31.82	34.8	23.81	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.253</i>	<i>1.370</i>	<i>0.937</i>	<i>1.250</i>
# P-H5-020-150FF-NFR-AIS-06.363	20	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	31.82	34.8	23.81	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.253</i>	<i>1.370</i>	<i>0.937</i>	<i>1.250</i>
P-H5-020-150FF-ALA-SET-08.000	20	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	31.82	34.9	26.20	20.60
		<i>0.591</i>	<i>0.315</i>				<i>1.253</i>	<i>1.374</i>	<i>1.031</i>	<i>0.811</i>
# P-H5-020-150P-ALA-SET-08.000	20	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	31.82		26.20	20.60
		<i>0.591</i>	<i>0.315</i>				<i>1.253</i>		<i>1.031</i>	<i>0.811</i>
# P-H5-020-150SF-NFR-SLC-19.050	20	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	31.82	34.8	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>1.253</i>	<i>1.370</i>	<i>0.768</i>	
# P-H5-020-150FF-NFR-SLC-19.050	20	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	31.82	34.8	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>1.253</i>	<i>1.370</i>	<i>0.768</i>	

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-022-090FF-PFR-FLC-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	35.00	40.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-022-090FF-PFR-AIS-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	35.00	40.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-022-090SF-PFR-SET-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	35.00	40.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-022-090FF-PFR-SET-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	35.00	40.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-022-090SF-PFR-NIL-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	35.00	40.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-022-090SF-PFR-AIS-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	35.00	40.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-022-090SF-PFR-FLC-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	35.00	40.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.874</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-022-090FF-PFR-NIL-06.000	22	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	35.00	40.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-022-090SF-PFR-AIS-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090SF-PFR-NIL-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090SF-PFR-FLC-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090SF-PFR-ALS-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090P-ALA-SET-06.350	22	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	35.00		20.24	23.81
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>		<i>0.797</i>	<i>0.937</i>
# P-H5-022-090FF-ALA-SET-06.350	22	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.00	38.1	20.24	23.81
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.500</i>	<i>0.797</i>	<i>0.937</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-022-090FF-PFR-AIS-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090FF-PFR-ALS-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090FF-PFR-NIL-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090FF-PFR-FLC-06.350	22	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090FF-PFR-AIS-07.938	22	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090SF-PFR-AIS-07.938	22	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090FF-PFR-AIS-08.000	22	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	35.00	40.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-022-090P-ALA-SET-08.000	22	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	35.00		20.20	23.80
		<i>0.354</i>	<i>0.315</i>				<i>1.378</i>		<i>0.795</i>	<i>0.937</i>
# P-H5-022-090SF-PFR-AIS-08.000	22	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	35.00	40.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.378</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-022-090FF-ALA-SET-08.000	22	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.00	38.1	20.20	23.80
		<i>0.354</i>	<i>0.315</i>				<i>1.378</i>	<i>1.500</i>	<i>0.795</i>	<i>0.937</i>
# P-H5-022-090FF-PFR-AIS-09.525	22	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-090SF-PFR-AIS-09.525	22	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	35.00	39.9	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.378</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-022-150P-ALA-SET-06.350	22	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	35.00		27.78	23.81
		<i>0.591</i>	<i>0.250</i>				<i>1.378</i>		<i>1.094</i>	<i>0.937</i>
# P-H5-022-150FF-ALA-SET-06.350	22	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.00	38.1	26.19	23.81
		<i>0.591</i>	<i>0.250</i>				<i>1.378</i>	<i>1.500</i>	<i>1.031</i>	<i>0.937</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-022-150FF-NFR-AIS-06.363	22	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	35.00	38.1	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.378</i>	<i>1.500</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-022-150SF-NFR-AIS-06.363	22	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	35.00	38.1	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.378</i>	<i>1.500</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-022-150P-ALA-SET-08.000	22	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	35.00		26.20	23.80
		<i>0.591</i>	<i>0.315</i>				<i>1.378</i>		<i>1.031</i>	<i>0.937</i>
# P-H5-022-150FF-ALA-SET-08.000	22	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.00	38.1	26.20	23.80
		<i>0.591</i>	<i>0.315</i>				<i>1.378</i>	<i>1.500</i>	<i>1.031</i>	<i>0.937</i>
# P-H5-022-150SF-NFR-SLC-19.050	22	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	35.00	38.1	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>1.378</i>	<i>1.500</i>	<i>0.700</i>	
# P-H5-022-150FF-NFR-SLC-19.050	22	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	35.00	38.1	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>1.378</i>	<i>1.500</i>	<i>0.768</i>	
P-H5-024-090FF-ALA-SET-06.350	24	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	41.3	21.83	25.40
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>	<i>1.626</i>	<i>0.859</i>	<i>1.000</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-024-090P-ALA-SET-06.350	24	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		21.83	25.40
		<i>0.354</i>	<i>0.250</i>				<i>1.503</i>		<i>0.859</i>	<i>1.000</i>
P-H5-024-090FF-ALA-SET-08.000	24	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	41.3	21.80	25.40
		<i>0.354</i>	<i>0.315</i>				<i>1.503</i>	<i>1.626</i>	<i>0.858</i>	<i>1.000</i>
# P-H5-024-090P-ALA-SET-08.000	24	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		21.80	25.40
		<i>0.354</i>	<i>0.315</i>				<i>1.503</i>		<i>0.858</i>	<i>1.000</i>
# P-H5-024-150P-ALA-SET-06.350	24	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		27.78	25.40
		<i>0.591</i>	<i>0.250</i>				<i>1.503</i>		<i>1.094</i>	<i>1.000</i>
# P-H5-024-150FF-ALA-SET-06.350	24	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	41.3	27.78	25.40
		<i>0.591</i>	<i>0.250</i>				<i>1.503</i>	<i>1.626</i>	<i>1.094</i>	<i>1.000</i>
# P-H5-024-150SF-NFR-AIS-06.363	24	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_H (Single Flange)	38.18	40.9	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.503</i>	<i>1.610</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-024-150FF-NFR-AIS-06.363	24	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	38.18	40.9	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.503</i>	<i>1.610</i>	<i>1.000</i>	<i>1.250</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-024-150P-ALA-SET-08.000	24	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.18		8.00	25.40
		<i>0.591</i>	<i>0.315</i>				<i>1.503</i>		<i>0.315</i>	<i>1.000</i>
# P-H5-024-150FF-ALA-SET-08.000	24	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.18	41.3	27.80	25.40
		<i>0.591</i>	<i>0.315</i>				<i>1.503</i>	<i>1.626</i>	<i>1.094</i>	<i>1.000</i>
# P-H5-024-150SF-NFR-SLC-19.050	24	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	38.18	41.1	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>1.503</i>	<i>1.618</i>	<i>0.700</i>	
# P-H5-024-150FF-NFR-SLC-19.050	24	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	38.18	41.1	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>1.503</i>	<i>1.618</i>	<i>0.768</i>	
P-H5-025-090FF-PFR-AIS-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	39.77	45.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-025-090FF-PFR-NIL-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	39.77	45.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-025-090FF-PFR-FLC-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub -tm-	FF_FL_HW (Double Flange)	39.77	45.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.874</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-025-090SF-PFR-FLC-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	39.77	45.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-025-090SF-PFR-NIL-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	39.77	45.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-025-090SF-PFR-SET-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	39.77	45.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-025-090FF-PFR-SET-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	39.77	45.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-025-090SF-PFR-AIS-06.000	25	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	39.77	45.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-025-090SF-PFR-FLC-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-090SF-PFR-ALS-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-025-090SF-PFR-AIS-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-090SF-PFR-NIL-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-090FF-PFR-ALS-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-090FF-ALA-SET-06.350	25	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	39.77	42.9	21.83	25.40
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.689</i>	<i>0.859</i>	<i>1.000</i>
# P-H5-025-090P-ALA-SET-06.350	25	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	39.77		21.83	25.40
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>		<i>0.859</i>	<i>1.000</i>
# P-H5-025-090FF-PFR-FLC-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
P-H5-025-090FF-PFR-AIS-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-025-090FF-PFR-NIL-06.350	25	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-090SF-PFR-AIS-07.938	25	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-090FF-PFR-AIS-07.938	25	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-090FF-ALA-SET-08.000	25	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	39.77	42.9	21.80	25.40
		<i>0.354</i>	<i>0.315</i>				<i>1.566</i>	<i>1.689</i>	<i>0.858</i>	<i>1.000</i>
P-H5-025-090FF-PFR-AIS-08.000	25	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	39.77	45.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-025-090SF-PFR-AIS-08.000	25	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	39.77	45.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.566</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-025-090P-ALA-SET-08.000	25	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	39.77		21.80	25.40
		<i>0.354</i>	<i>0.315</i>				<i>1.566</i>		<i>0.858</i>	<i>1.000</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-025-090SF-PFR-AIS-09.525	25	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-090FF-PFR-AIS-09.525	25	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	39.77	44.7	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.566</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-025-150FF-ALA-SET-06.350	25	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	39.77	42.9	27.78	25.40
		<i>0.591</i>	<i>0.250</i>				<i>1.566</i>	<i>1.689</i>	<i>1.094</i>	<i>1.000</i>
# P-H5-025-150P-ALA-SET-06.350	25	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	39.77		27.78	25.40
		<i>0.591</i>	<i>0.250</i>				<i>1.566</i>		<i>1.094</i>	<i>1.000</i>
# P-H5-025-150FF-ALA-SET-08.000	25	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	39.77	42.9	27.80	25.40
		<i>0.591</i>	<i>0.315</i>				<i>1.566</i>	<i>1.689</i>	<i>1.094</i>	<i>1.000</i>
# P-H5-025-150P-ALA-SET-08.000	25	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	39.77		8.00	25.40
		<i>0.591</i>	<i>0.315</i>				<i>1.566</i>		<i>0.315</i>	<i>1.000</i>
# P-H5-026-090FF-ALA-SET-06.350	26	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	41.36	44.5	21.83	26.99
		<i>0.354</i>	<i>0.250</i>				<i>1.628</i>	<i>1.752</i>	<i>0.859</i>	<i>1.063</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-026-090P-ALA-SET-06.350	26	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	41.36		21.83	26.99
		<i>0.354</i>	<i>0.250</i>				<i>1.628</i>		<i>0.859</i>	<i>1.063</i>
# P-H5-026-090P-ALA-SET-08.000	26	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	41.36		21.80	27.00
		<i>0.354</i>	<i>0.315</i>				<i>1.628</i>		<i>0.858</i>	<i>1.063</i>
P-H5-026-090FF-ALA-SET-08.000	26	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	41.36	44.5	21.80	27.00
		<i>0.354</i>	<i>0.315</i>				<i>1.628</i>	<i>1.752</i>	<i>0.858</i>	<i>1.063</i>
# P-H5-026-150FF-ALA-SET-06.350	26	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	41.36	44.5	27.78	26.99
		<i>0.591</i>	<i>0.250</i>				<i>1.628</i>	<i>1.752</i>	<i>1.094</i>	<i>1.063</i>
# P-H5-026-150P-ALA-SET-06.350	26	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	41.36		27.78	26.99
		<i>0.591</i>	<i>0.250</i>				<i>1.628</i>		<i>1.094</i>	<i>1.063</i>
# P-H5-026-150FF-ALA-SET-08.000	26	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	41.36	44.5	27.80	27.00
		<i>0.591</i>	<i>0.315</i>				<i>1.628</i>	<i>1.752</i>	<i>1.094</i>	<i>1.063</i>
# P-H5-026-150P-ALA-SET-08.000	26	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	41.36		8.00	27.00
		<i>0.591</i>	<i>0.315</i>				<i>1.628</i>		<i>0.315</i>	<i>1.063</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-028-090FF-PFR-AIS-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	44.55	50.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
P-H5-028-090FF-PFR-SET-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	44.55	50.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-028-090SF-PFR-AIS-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	44.55	50.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-028-090FF-PFR-FLC-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	44.55	50.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-028-090SF-PFR-FLC-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	44.55	50.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-028-090SF-PFR-NIL-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	44.55	50.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-028-090SF-PFR-SET-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	44.55	50.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.874</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-028-090FF-PFR-NIL-06.000	28	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	44.55	50.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-028-090SF-PFR-ALS-06.350	28	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090SF-PFR-AIS-06.350	28	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090SF-PFR-NIL-06.350	28	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090P-ALA-SET-06.350	28	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	44.55		21.83	3.16
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>		<i>0.859</i>	<i>0.124</i>
# P-H5-028-090SF-PFR-FLC-06.350	28	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090FF-PFR-AIS-06.350	28	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-028-090FF-PFR-FLC-06.350	28	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090FF-PFR-NIL-06.350	28	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090FF-PFR-ALS-06.350	28	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090FF-ALA-SET-06.350	28	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	44.55	47.6	21.83	30.16
		<i>0.354</i>	<i>0.250</i>				<i>1.754</i>	<i>1.874</i>	<i>0.859</i>	<i>1.187</i>
# P-H5-028-090FF-PFR-AIS-07.938	28	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090SF-PFR-AIS-07.938	28	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090SF-PFR-AIS-08.000	28	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	44.55	50.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-028-090FF-ALA-SET-08.000	28	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	44.55	47.6	21.80	30.20
		<i>0.354</i>	<i>0.315</i>				<i>1.754</i>	<i>1.874</i>	<i>0.858</i>	<i>1.189</i>
# P-H5-028-090P-ALA-SET-08.000	28	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	44.55		21.80	30.20
		<i>0.354</i>	<i>0.315</i>				<i>1.754</i>		<i>0.858</i>	<i>1.189</i>
# P-H5-028-090FF-PFR-AIS-08.000	28	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	44.55	50.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.754</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-028-090SF-PFR-AIS-09.525	28	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-090FF-PFR-AIS-09.525	28	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	44.55	49.5	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.754</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-028-150P-ALA-SET-06.350	28	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	44.55		27.78	3.16
		<i>0.591</i>	<i>0.250</i>				<i>1.754</i>		<i>1.094</i>	<i>0.124</i>
# P-H5-028-150FF-ALA-SET-06.350	28	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	44.55	47.6	27.78	30.16
		<i>0.591</i>	<i>0.250</i>				<i>1.754</i>	<i>1.874</i>	<i>1.094</i>	<i>1.187</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-028-150SF-NFR-AIS-06.363	28	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	44.55	47.5	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.754</i>	<i>1.870</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-028-150FF-NFR-AIS-06.363	28	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	44.55	47.5	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.754</i>	<i>1.870</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-028-150P-ALA-SET-08.000	28	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	44.55		8.00	30.20
		<i>0.591</i>	<i>0.315</i>				<i>1.754</i>		<i>0.315</i>	<i>1.189</i>
# P-H5-028-150FF-ALA-SET-08.000	28	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	44.55	47.6	27.80	30.20
		<i>0.591</i>	<i>0.315</i>				<i>1.754</i>	<i>1.874</i>	<i>1.094</i>	<i>1.189</i>
# P-H5-028-150FF-NFR-SLC-19.050	28	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	44.55	47.5	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>1.754</i>	<i>1.870</i>	<i>0.768</i>	
# P-H5-028-150SF-NFR-SLC-19.050	28	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	44.55	47.5	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>1.754</i>	<i>1.870</i>	<i>0.700</i>	
# P-H5-029-090FF-PFR-FLC-06.000	29	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	46.14	51.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.874</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-029-090SF-PFR-SET-06.000	29	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	46.14	51.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-029-090SF-PFR-AIS-06.000	29	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	46.14	51.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-029-090FF-PFR-SET-06.000	29	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	46.14	51.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-029-090FF-PFR-NIL-06.000	29	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	46.14	51.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-029-090SF-PFR-NIL-06.000	29	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	46.14	51.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-029-090FF-PFR-AIS-06.000	29	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	46.14	51.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-029-090SF-PFR-FLC-06.000	29	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	46.14	51.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.874</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-029-090FF-PFR-ALS-06.350	29	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090SF-PFR-ALS-06.350	29	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090SF-PFR-NIL-06.350	29	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090FF-PFR-NIL-06.350	29	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090FF-PFR-AIS-06.350	29	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090SF-PFR-AIS-06.350	29	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090SF-PFR-FLC-06.350	29	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-029-090FF-PFR-FLC-06.350	29	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090FF-PFR-AIS-07.938	29	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090SF-PFR-AIS-07.938	29	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090FF-PFR-AIS-08.000	29	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	46.14	51.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-029-090SF-PFR-AIS-08.000	29	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	46.14	51.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.817</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-029-090FF-PFR-AIS-09.525	29	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-029-090SF-PFR-AIS-09.525	29	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	46.14	51.4	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.817</i>	<i>2.024</i>	<i>0.813</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-030-090SF-PFR-FLC-06.000	30	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	47.73	53.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-030-090SF-PFR-SET-06.000	30	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	47.73	53.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-030-090FF-PFR-NIL-06.000	30	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	47.73	53.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-030-090SF-PFR-NIL-06.000	30	9.0	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	47.73	53.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-030-090FF-PFR-AIS-06.000	30	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	47.73	53.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-030-090FF-PFR-SET-06.000	30	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	47.73	53.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-030-090FF-PFR-FLC-06.000	30	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	47.73	53.0	20.60	22.20
		<i>0.354</i>	<i>0.236</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.874</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-030-090SF-PFR-AIS-06.000	30	9.0	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	47.73	53.0	20.60	22.00
		<i>0.354</i>	<i>0.236</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-030-090SF-PFR-AIS-06.350	30	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090SF-PFR-FLC-06.350	30	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090SF-PFR-NIL-06.350	30	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	47.73	71.1	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.799</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090SF-PFR-ALS-06.350	30	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090FF-PFR-FLC-06.350	30	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090FF-ALA-SET-06.350	30	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	47.73	50.8	21.83	30.16
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.000</i>	<i>0.859</i>	<i>1.187</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-030-090FF-PFR-ALS-06.350	30	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090FF-PFR-AIS-06.350	30	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090FF-PFR-NIL-06.350	30	9.0	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	47.73	71.1	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>	<i>2.799</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090P-ALA-SET-06.350	30	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.73		21.83	3.16
		<i>0.354</i>	<i>0.250</i>				<i>1.879</i>		<i>0.859</i>	<i>0.124</i>
# P-H5-030-090FF-PFR-AIS-07.938	30	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090SF-PFR-AIS-07.938	30	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090FF-ALA-SET-08.000	30	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	47.73	50.8	21.80	30.20
		<i>0.354</i>	<i>0.315</i>				<i>1.879</i>	<i>2.000</i>	<i>0.858</i>	<i>1.189</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-030-090FF-PFR-AIS-08.000	30	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	47.73	53.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-030-090SF-PFR-AIS-08.000	30	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	47.73	53.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>1.879</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-030-090P-ALA-SET-08.000	30	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.73		21.80	30.20
		<i>0.354</i>	<i>0.315</i>				<i>1.879</i>		<i>0.858</i>	<i>1.189</i>
# P-H5-030-090FF-PFR-AIS-09.525	30	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-090SF-PFR-AIS-09.525	30	9.0	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	47.73	52.8	20.64	22.23
		<i>0.354</i>	<i>0.375</i>				<i>1.879</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-030-150P-ALA-SET-06.350	30	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.73		27.78	3.16
		<i>0.591</i>	<i>0.250</i>				<i>1.879</i>		<i>1.094</i>	<i>0.124</i>
# P-H5-030-150FF-ALA-SET-06.350	30	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	47.73	50.8	27.78	30.16
		<i>0.591</i>	<i>0.250</i>				<i>1.879</i>	<i>2.000</i>	<i>1.094</i>	<i>1.187</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-030-150SF-NFR-AIS-06.363	30	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	47.73	50.8	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.879</i>	<i>2.000</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-030-150FF-NFR-AIS-06.363	30	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	47.73	50.8	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>1.879</i>	<i>2.000</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-030-150FF-ALA-SET-08.000	30	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	47.73	50.8	27.80	30.20
		<i>0.591</i>	<i>0.315</i>				<i>1.879</i>	<i>2.000</i>	<i>1.094</i>	<i>1.189</i>
# P-H5-030-150P-ALA-SET-08.000	30	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	47.73		8.00	30.20
		<i>0.591</i>	<i>0.315</i>				<i>1.879</i>		<i>0.315</i>	<i>1.189</i>
# P-H5-030-150FF-NFR-SLC-19.050	30	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	47.73	50.8	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>1.879</i>	<i>2.000</i>	<i>0.768</i>	
# P-H5-030-150SF-NFR-SLC-19.050	30	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	47.73	50.8	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>1.879</i>	<i>2.000</i>	<i>0.700</i>	
# P-H5-032-090FF-ALA-SET-06.350	32	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	50.91	54.0	21.83	31.75
		<i>0.354</i>	<i>0.250</i>				<i>2.004</i>	<i>2.126</i>	<i>0.859</i>	<i>1.250</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-032-090P-ALA-SET-06.350	32	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	50.91		21.83	31.75
		<i>0.354</i>	<i>0.250</i>				<i>2.004</i>		<i>0.859</i>	<i>1.250</i>
# P-H5-032-090P-ALA-SET-08.000	32	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	50.91		21.80	31.80
		<i>0.354</i>	<i>0.315</i>				<i>2.004</i>		<i>0.858</i>	<i>1.252</i>
# P-H5-032-090FF-ALA-SET-08.000	32	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	50.91	54.0	21.80	31.80
		<i>0.354</i>	<i>0.315</i>				<i>2.004</i>	<i>2.126</i>	<i>0.858</i>	<i>1.252</i>
# P-H5-032-150P-ALA-SET-06.350	32	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	50.91		27.78	31.75
		<i>0.591</i>	<i>0.250</i>				<i>2.004</i>		<i>1.094</i>	<i>1.250</i>
# P-H5-032-150FF-ALA-SET-06.350	32	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	50.91	54.0	27.78	31.75
		<i>0.591</i>	<i>0.250</i>				<i>2.004</i>	<i>2.126</i>	<i>1.094</i>	<i>1.250</i>
# P-H5-032-150FF-NFR-AIS-06.363	32	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	50.91	53.8	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>2.004</i>	<i>2.118</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-032-150SF-NFR-AIS-06.363	32	15.0	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	50.91	53.8	25.40	31.75
		<i>0.591</i>	<i>0.251</i>				<i>2.004</i>	<i>2.118</i>	<i>1.000</i>	<i>1.250</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-032-150P-ALA-SET-08.000	32	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	50.91		8.00	31.80
		<i>0.591</i>	<i>0.315</i>				<i>2.004</i>		<i>0.315</i>	<i>1.252</i>
# P-H5-032-150FF-ALA-SET-08.000	32	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	50.91	54.0	27.80	31.80
		<i>0.591</i>	<i>0.315</i>				<i>2.004</i>	<i>2.126</i>	<i>1.094</i>	<i>1.252</i>
# P-H5-032-150FF-NFR-SLC-19.050	32	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	50.91	53.8	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>2.004</i>	<i>2.118</i>	<i>0.768</i>	
# P-H5-032-150SF-NFR-SLC-19.050	32	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	50.91	53.8	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>2.004</i>	<i>2.118</i>	<i>0.700</i>	
# P-H5-034-090P-ALA-SET-06.350	34	9.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	54.09		21.83	34.93
		<i>0.354</i>	<i>0.250</i>				<i>2.130</i>		<i>0.859</i>	<i>1.375</i>
# P-H5-034-090FF-ALA-SET-06.350	34	9.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	54.09	57.2	21.83	34.93
		<i>0.354</i>	<i>0.250</i>				<i>2.130</i>	<i>2.252</i>	<i>0.859</i>	<i>1.375</i>
# P-H5-034-090FF-ALA-SET-08.000	34	9.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	54.09	57.2	21.80	35.00
		<i>0.354</i>	<i>0.315</i>				<i>2.130</i>	<i>2.252</i>	<i>0.858</i>	<i>1.378</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-034-090P-ALA-SET-08.000	34	9.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	54.09		21.80	35.00
		<i>0.354</i>	<i>0.315</i>				<i>2.130</i>		<i>0.858</i>	<i>1.378</i>
# P-H5-034-150FF-ALA-SET-06.350	34	15.0	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	54.09	57.2	27.78	34.93
		<i>0.591</i>	<i>0.250</i>				<i>2.130</i>	<i>2.252</i>	<i>1.094</i>	<i>1.375</i>
# P-H5-034-150P-ALA-SET-06.350	34	15.0	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	54.09		27.78	34.93
		<i>0.591</i>	<i>0.250</i>				<i>2.130</i>		<i>1.094</i>	<i>1.375</i>
P-H5-034-150FF-ALA-SET-08.000	34	15.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	54.09	57.2	27.80	35.00
		<i>0.591</i>	<i>0.315</i>				<i>2.130</i>	<i>2.252</i>	<i>1.094</i>	<i>1.378</i>
# P-H5-034-150P-ALA-SET-08.000	34	15.0	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	54.09		8.00	35.00
		<i>0.591</i>	<i>0.315</i>				<i>2.130</i>		<i>0.315</i>	<i>1.378</i>
# P-H5-036-090P-ALA-SET-07.938	36	9.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		23.81	38.10
		<i>0.354</i>	<i>0.313</i>				<i>2.255</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-036-090P-ALA-SET-10.000	36	9.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		23.80	38.10
		<i>0.354</i>	<i>0.394</i>				<i>2.255</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-036-150P-ALA-SET-07.938	36	15.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		3.16	38.10
		<i>0.591</i>	<i>0.313</i>				<i>2.255</i>		<i>0.124</i>	<i>1.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-036-150SF-NFR-AIS-07.952	36	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	57.27	61.2	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.255</i>	<i>2.409</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-036-150FF-NFR-AIS-07.952	36	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	57.27	61.2	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.255</i>	<i>2.409</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-036-150P-ALA-SET-10.000	36	15.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	57.27		10.30	38.10
		<i>0.591</i>	<i>0.394</i>				<i>2.255</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-036-150SF-NFR-SLC-19.050	36	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	57.27	61.2	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>2.255</i>	<i>2.409</i>	<i>0.700</i>	
# P-H5-036-150FF-NFR-SLC-19.050	36	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	57.27	61.2	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>2.255</i>	<i>2.409</i>	<i>0.768</i>	
# P-H5-038-090P-ALA-SET-07.938	38	9.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	60.45		23.81	38.10
		<i>0.354</i>	<i>0.313</i>				<i>2.380</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-038-090P-ALA-SET-10.000	38	9.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	60.45		23.80	38.10
		<i>0.354</i>	<i>0.394</i>				<i>2.380</i>		<i>0.937</i>	<i>1.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-038-150P-ALA-SET-07.938	38	15.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	60.45		3.16	38.10
		<i>0.591</i>	<i>0.313</i>				<i>2.380</i>		<i>0.124</i>	<i>1.500</i>
# P-H5-038-150SF-NFR-AIS-07.952	38	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	60.45	64.5	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.380</i>	<i>2.539</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-038-150FF-NFR-AIS-07.952	38	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	60.45	64.5	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.380</i>	<i>2.539</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-038-150P-ALA-SET-10.000	38	15.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	60.45		10.30	38.10
		<i>0.591</i>	<i>0.394</i>				<i>2.380</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-038-150SF-NFR-SLC-19.050	38	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	60.45	64.5	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>2.380</i>	<i>2.539</i>	<i>0.700</i>	
# P-H5-040-090FF-PFR-AIS-06.350	40	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.64	68.8	22.23	22.23
		<i>0.354</i>	<i>0.250</i>				<i>2.506</i>	<i>2.709</i>	<i>0.875</i>	<i>0.875</i>
# P-H5-040-090SF-PFR-AIS-06.350	40	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	63.64	68.8	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>2.506</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-040-090FF-PFR-NIL-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	63.64	68.8	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.875</i>	<i>0.875</i>
# P-H5-040-090SF-PFR-ALS-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	63.64	68.8	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-040-090FF-PFR-AIS-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.64	68.8	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.875</i>	<i>0.875</i>
# P-H5-040-090SF-PFR-NIL-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_HW (Single Flange)	63.64	68.8	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-040-090FF-PFR-ALS-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	63.64	68.8	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-040-090FF-PFR-FLC-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	63.64	68.8	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-040-090SF-PFR-AIS-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	63.64	68.8	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-040-090SF-PFR-FLC-07.938	40	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	63.64	68.8	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-040-090P-ALA-SET-07.938	40	9.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	63.64		23.81	38.10
		<i>0.354</i>	<i>0.313</i>				<i>2.506</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-040-090SF-PFR-FLC-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	63.64	69.0	20.60	22.20
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-040-090SF-PFR-AIS-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	63.64	69.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-040-090FF-PFR-NIL-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	63.64	69.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.874</i>	<i>0.866</i>
# P-H5-040-090FF-PFR-FLC-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	63.64	69.0	20.60	22.20
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-040-090SF-PFR-NIL-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_HW (Single Flange)	63.64	69.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-040-090FF-PFR-AIS-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	63.64	69.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.874</i>	<i>0.866</i>
# P-H5-040-090SF-PFR-SET-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	63.64	69.0	20.60	22.20
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-040-090FF-PFR-SET-08.000	40	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	63.64	69.0	20.60	22.20
		<i>0.354</i>	<i>0.315</i>				<i>2.506</i>	<i>2.717</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-040-090P-ALA-SET-10.000	40	9.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	63.64		23.80	38.10
		<i>0.354</i>	<i>0.394</i>				<i>2.506</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-040-090SF-PFR-AIS-10.000	40	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	63.64	69.0	20.60	22.00
		<i>0.354</i>	<i>0.394</i>				<i>2.506</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
P-H5-040-090FF-PFR-AIS-10.000	40	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	63.64	69.0	22.20	22.00
		<i>0.354</i>	<i>0.394</i>				<i>2.506</i>	<i>2.717</i>	<i>0.874</i>	<i>0.866</i>
# P-H5-040-090FF-PFR-AIS-12.000	40	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	63.64	69.0	22.20	22.00
		<i>0.354</i>	<i>0.472</i>				<i>2.506</i>	<i>2.717</i>	<i>0.874</i>	<i>0.866</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-040-090SF-PFR-AIS-12.000	40	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	63.64	69.0	20.60	22.00
		<i>0.354</i>	<i>0.472</i>				<i>2.506</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-040-090FF-PFR-AIS-12.700	40	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.64	68.8	22.23	22.23
		<i>0.354</i>	<i>0.500</i>				<i>2.506</i>	<i>2.709</i>	<i>0.875</i>	<i>0.875</i>
# P-H5-040-090SF-PFR-AIS-12.700	40	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	63.64	68.8	20.64	22.23
		<i>0.354</i>	<i>0.500</i>				<i>2.506</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-040-150P-ALA-SET-07.938	40	15.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	63.64		3.16	38.10
		<i>0.591</i>	<i>0.313</i>				<i>2.506</i>		<i>0.124</i>	<i>1.500</i>
# P-H5-040-150SF-NFR-AIS-07.952	40	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	63.64	68.8	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-040-150FF-NFR-AIS-07.952	40	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.64	68.8	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.506</i>	<i>2.709</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-040-150P-ALA-SET-10.000	40	15.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	63.64		10.30	38.10
		<i>0.591</i>	<i>0.394</i>				<i>2.506</i>		<i>0.406</i>	<i>1.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-040-150SF-NFR-SLC-19.050	40	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	63.64	67.6	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>2.506</i>	<i>2.661</i>	<i>0.700</i>	
# P-H5-042-150SF-NFR-AIS-07.952	42	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	66.82	70.9	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.631</i>	<i>2.791</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-042-150FF-NFR-AIS-07.952	42	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	66.82	70.9	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.631</i>	<i>2.791</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-042-150SF-NFR-SLC-19.050	42	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	66.82	70.9	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>2.631</i>	<i>2.791</i>	<i>0.700</i>	
# P-H5-044-090P-ALA-SET-07.938	44	9.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	70.00		23.81	38.10
		<i>0.354</i>	<i>0.313</i>				<i>2.756</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-044-090P-ALA-SET-10.000	44	9.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	70.00		23.80	38.10
		<i>0.354</i>	<i>0.394</i>				<i>2.756</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-044-150P-ALA-SET-07.938	44	15.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	70.00		3.16	38.10
		<i>0.591</i>	<i>0.313</i>				<i>2.756</i>		<i>0.124</i>	<i>1.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-044-150SF-NFR-AIS-07.952	44	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	70.00	73.9	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.756</i>	<i>2.909</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-044-150FF-NFR-AIS-07.952	44	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	70.00	73.9	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>2.756</i>	<i>2.909</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-044-150P-ALA-SET-10.000	44	15.0	10.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	70.00		10.30	38.10
		<i>0.591</i>	<i>0.394</i>				<i>2.756</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-044-150SF-NFR-SLC-19.050	44	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	70.00	73.9	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>2.756</i>	<i>2.909</i>	<i>0.700</i>	
# P-H5-048-090P-ALA-SET-07.938	48	9.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	76.36		23.81	38.10
		<i>0.354</i>	<i>0.313</i>				<i>3.006</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-048-090P-ALA-SET-12.000	48	9.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	76.36		23.80	38.10
		<i>0.354</i>	<i>0.472</i>				<i>3.006</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-048-150P-ALA-SET-07.938	48	15.0	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	76.36		3.16	38.10
		<i>0.591</i>	<i>0.313</i>				<i>3.006</i>		<i>0.124</i>	<i>1.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-048-150FF-NFR-AIS-07.952	48	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	76.36	79.5	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>3.006</i>	<i>3.130</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-048-150SF-NFR-AIS-07.952	48	15.0	7.952	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	76.36	79.5	25.40	31.75
		<i>0.591</i>	<i>0.313</i>				<i>3.006</i>	<i>3.130</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-048-150P-ALA-SET-12.000	48	15.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	76.36		10.30	38.10
		<i>0.591</i>	<i>0.472</i>				<i>3.006</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-048-150SF-NFR-SLC-19.050	48	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	76.36	80.3	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>3.006</i>	<i>3.161</i>	<i>0.700</i>	
# P-H5-050-090SF-PFR-AIS-06.350	50	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	79.55	83.6	20.64	22.23
		<i>0.354</i>	<i>0.250</i>				<i>3.132</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-050-090FF-PFR-AIS-06.350	50	9.0	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	79.55	83.6	22.23	22.23
		<i>0.354</i>	<i>0.250</i>				<i>3.132</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-H5-050-090SF-PFR-AIS-07.938	50	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	79.55	83.6	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.132</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-050-090FF-PFR-AIS-07.938	50	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	79.55	83.6	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.132</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-H5-050-090SF-PFR-NIL-07.938	50	9.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_HW (Single Flange)	79.55	83.6	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.132</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-050-090FF-PFR-ALS-07.938	50	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	79.55	83.6	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.132</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-050-090FF-PFR-FLC-07.938	50	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	79.55	83.6	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.132</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-050-090SF-PFR-FLC-07.938	50	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_2HW (Single Flange)	79.55	83.6	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.132</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-050-090SF-PFR-ALS-07.938	50	9.0	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Single Flange)	79.55	83.6	20.64	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.132</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-050-090FF-PFR-NIL-07.938	50	9.0	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	79.55	83.6	22.23	22.23
		<i>0.354</i>	<i>0.313</i>				<i>3.132</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-050-090SF-PFR-AIS-08.000	50	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	79.55	84.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>3.132</i>	<i>3.307</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-050-090SF-PFR-FLC-08.000	50	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	79.55	84.0	20.60	22.20
		<i>0.354</i>	<i>0.315</i>				<i>3.132</i>	<i>3.307</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-050-090SF-PFR-SET-08.000	50	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	79.55	84.0	20.60	22.20
		<i>0.354</i>	<i>0.315</i>				<i>3.132</i>	<i>3.307</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-050-090SF-PFR-NIL-08.000	50	9.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_HW (Single Flange)	79.55	84.0	20.60	22.00
		<i>0.354</i>	<i>0.315</i>				<i>3.132</i>	<i>3.307</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-050-090FF-PFR-SET-08.000	50	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_MW (Double Flange)	79.55	84.0	20.60	22.20
		<i>0.354</i>	<i>0.315</i>				<i>3.132</i>	<i>3.307</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-050-090FF-PFR-FLC-08.000	50	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	79.55	84.0	20.60	22.20
		<i>0.354</i>	<i>0.315</i>				<i>3.132</i>	<i>3.307</i>	<i>0.811</i>	<i>0.874</i>
# P-H5-050-090FF-PFR-AIS-08.000	50	9.0	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	79.55	84.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>3.132</i>	<i>3.307</i>	<i>0.874</i>	<i>0.866</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-050-090FF-PFR-NIL-08.000	50	9.0	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	79.55	84.0	22.20	22.00
		<i>0.354</i>	<i>0.315</i>				<i>3.132</i>	<i>3.307</i>	<i>0.874</i>	<i>0.866</i>
# P-H5-050-090P-ALA-SET-09.525	50	9.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	79.55		23.81	38.10
		<i>0.354</i>	<i>0.375</i>				<i>3.132</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-050-090SF-PFR-AIS-10.000	50	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	79.55	84.0	20.60	22.00
		<i>0.354</i>	<i>0.394</i>				<i>3.132</i>	<i>3.307</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-050-090FF-PFR-AIS-10.000	50	9.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	79.55	84.0	22.20	22.00
		<i>0.354</i>	<i>0.394</i>				<i>3.132</i>	<i>3.307</i>	<i>0.874</i>	<i>0.866</i>
# P-H5-050-090P-ALA-SET-12.000	50	9.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	79.55		23.80	38.10
		<i>0.354</i>	<i>0.472</i>				<i>3.132</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-050-090SF-PFR-AIS-12.000	50	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	79.55	84.0	20.60	22.00
		<i>0.354</i>	<i>0.472</i>				<i>3.132</i>	<i>3.307</i>	<i>0.811</i>	<i>0.866</i>
# P-H5-050-090FF-PFR-AIS-12.000	50	9.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	79.55	84.0	22.20	22.00
		<i>0.354</i>	<i>0.472</i>				<i>3.132</i>	<i>3.307</i>	<i>0.874</i>	<i>0.866</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-050-090SF-PFR-AIS-12.700	50	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	79.55	83.6	20.64	22.23
		<i>0.354</i>	<i>0.500</i>				<i>3.132</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-H5-050-090FF-PFR-AIS-12.700	50	9.0	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	79.55	83.6	22.23	22.23
		<i>0.354</i>	<i>0.500</i>				<i>3.132</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-H5-050-150P-ALA-SET-09.525	50	15.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	79.55		3.16	38.10
		<i>0.591</i>	<i>0.375</i>				<i>3.132</i>		<i>0.124</i>	<i>1.500</i>
# P-H5-050-150SF-NFR-AIS-09.538	50	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	79.55	82.8	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>3.132</i>	<i>3.260</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-050-150FF-NFR-AIS-09.538	50	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	79.55	82.8	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>3.132</i>	<i>3.260</i>	<i>1.000</i>	<i>1.250</i>
P-H5-050-150P-ALA-SET-12.000	50	15.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	79.55		10.30	38.10
		<i>0.591</i>	<i>0.472</i>				<i>3.132</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-050-150SF-NFR-SLC-19.050	50	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	79.55	82.8	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>3.132</i>	<i>3.260</i>	<i>0.700</i>	

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-056-090P-ALA-SET-09.525	56	9.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	89.09		23.81	38.10
		<i>0.354</i>	<i>0.375</i>				<i>3.507</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-056-090P-ALA-SET-12.000	56	9.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	89.09		23.80	38.10
		<i>0.354</i>	<i>0.472</i>				<i>3.507</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-056-150P-ALA-SET-09.525	56	15.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	89.09		3.16	38.10
		<i>0.591</i>	<i>0.375</i>				<i>3.507</i>		<i>0.124</i>	<i>1.500</i>
# P-H5-056-150FF-NFR-AIS-09.538	56	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	89.09	92.2	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>3.507</i>	<i>3.630</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-056-150SF-NFR-AIS-09.538	56	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	89.09	92.2	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>3.507</i>	<i>3.630</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-056-150P-ALA-SET-12.000	56	15.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	89.09		10.30	38.10
		<i>0.591</i>	<i>0.472</i>				<i>3.507</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-056-150SF-NFR-SLC-19.050	56	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	89.09	93.0	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>3.507</i>	<i>3.661</i>	<i>0.700</i>	
# P-H5-060-090P-ALA-SET-09.525	60	9.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	95.45		23.81	38.10
		<i>0.354</i>	<i>0.375</i>				<i>3.758</i>		<i>0.937</i>	<i>1.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-060-090P-ALA-SET-12.000	60	9.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	95.45		23.80	38.10
		<i>0.354</i>	<i>0.472</i>				<i>3.758</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-060-150P-ALA-SET-09.525	60	15.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	95.45		3.16	38.10
		<i>0.591</i>	<i>0.375</i>				<i>3.758</i>		<i>0.124</i>	<i>1.500</i>
# P-H5-060-150FF-NFR-AIS-09.538	60	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	95.45	98.9	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>3.758</i>	<i>3.894</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-060-150SF-NFR-AIS-09.538	60	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	95.45	98.9	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>3.758</i>	<i>3.894</i>	<i>1.000</i>	<i>1.250</i>
P-H5-060-150P-ALA-SET-12.000	60	15.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	95.45		10.30	38.10
		<i>0.591</i>	<i>0.472</i>				<i>3.758</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-060-150SF-NFR-SLC-19.050	60	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	95.45	99.6	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>3.758</i>	<i>3.921</i>	<i>0.700</i>	
# P-H5-062-090P-ALA-SET-09.525	62	9.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	98.64		23.81	38.10
		<i>0.354</i>	<i>0.375</i>				<i>3.883</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-062-090P-ALA-SET-12.000	62	9.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	98.64		23.80	38.10
		<i>0.354</i>	<i>0.472</i>				<i>3.883</i>		<i>0.937</i>	<i>1.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-062-150P-ALA-SET-09.525	62	15.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	98.64		3.16	38.10
		<i>0.591</i>	<i>0.375</i>				<i>3.883</i>		<i>0.124</i>	<i>1.500</i>
# P-H5-062-150SF-NFR-AIS-09.538	62	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	98.64	104.1	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>3.883</i>	<i>4.098</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-062-150FF-NFR-AIS-09.538	62	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	98.64	104.1	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>3.883</i>	<i>4.098</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-062-150P-ALA-SET-12.000	62	15.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	98.64		10.30	38.10
		<i>0.591</i>	<i>0.472</i>				<i>3.883</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-062-150FF-NFR-SLC-19.050	62	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	98.64	104.1	19.50	
		<i>0.591</i>	<i>0.750</i>				<i>3.883</i>	<i>4.098</i>	<i>0.768</i>	
# P-H5-062-150SF-NFR-SLC-19.050	62	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	98.64	104.1	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>3.883</i>	<i>4.098</i>	<i>0.700</i>	
# P-H5-064-150SF-NFR-AIS-09.538	64	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	101.82	14.9	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>4.009</i>	<i>0.587</i>	<i>1.000</i>	<i>1.250</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-064-150SF-NFR-SLC-19.050	64	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	101.82	15.7	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>4.009</i>	<i>0.618</i>	<i>0.700</i>	
# P-H5-070-090P-ALA-SET-09.525	70	9.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	111.36		23.81	38.10
		<i>0.354</i>	<i>0.375</i>				<i>4.384</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-070-090P-ALA-SET-12.000	70	9.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	111.36		23.80	38.10
		<i>0.354</i>	<i>0.472</i>				<i>4.384</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-070-150P-ALA-SET-09.525	70	15.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	111.36		3.16	38.10
		<i>0.591</i>	<i>0.375</i>				<i>4.384</i>		<i>0.124</i>	<i>1.500</i>
# P-H5-070-150P-ALA-SET-12.000	70	15.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	111.36		10.30	38.10
		<i>0.591</i>	<i>0.472</i>				<i>4.384</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-072-090P-ALA-SET-09.525	72	9.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	114.55		23.81	38.10
		<i>0.354</i>	<i>0.375</i>				<i>4.510</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-072-090P-ALA-SET-12.000	72	9.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	114.55		23.80	38.10
		<i>0.354</i>	<i>0.472</i>				<i>4.510</i>		<i>0.937</i>	<i>1.500</i>
# P-H5-072-150P-ALA-SET-09.525	72	15.0	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	114.55		3.16	38.10
		<i>0.591</i>	<i>0.375</i>				<i>4.510</i>		<i>0.124</i>	<i>1.500</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Pulleys - Timing - 5.000mm Pitch - HTD

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-H5-072-150SF-NFR-AIS-09.538	72	15.0	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	114.55	118.6	25.40	31.75
		<i>0.591</i>	<i>0.376</i>				<i>4.510</i>	<i>4.669</i>	<i>1.000</i>	<i>1.250</i>
# P-H5-072-150P-ALA-SET-12.000	72	15.0	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	114.55		10.30	38.10
		<i>0.591</i>	<i>0.472</i>				<i>4.510</i>		<i>0.406</i>	<i>1.500</i>
# P-H5-072-150SF-NFR-SLC-19.050	72	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	114.55	118.4	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>4.510</i>	<i>4.661</i>	<i>0.700</i>	
# P-H5-080-150SF-NFR-SLC-19.050	80	15.0	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	127.27	131.6	17.78	
		<i>0.591</i>	<i>0.750</i>				<i>5.011</i>	<i>5.181</i>	<i>0.700</i>	

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to [catalogues@minibearings.com.au](mailto:catalogues@minibearings.com.au)

