




MBA

**Pulleys - Timing - 5.080mm
Pitch - XL**

Timing Pulleys to suit XL Series 5.080mm Pitch Timing Belts.

Various materials as shown.

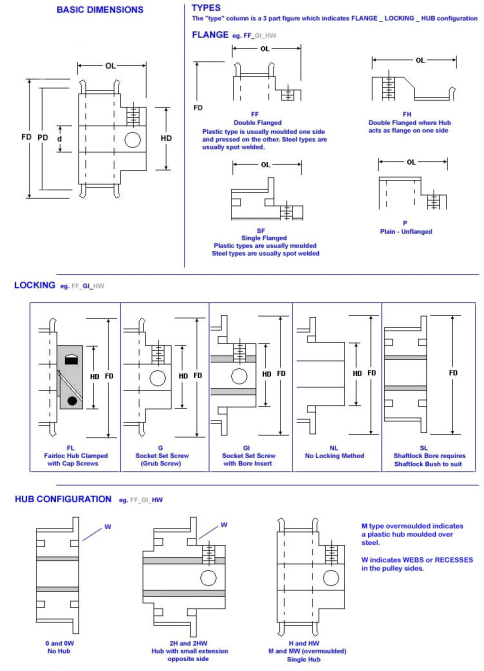

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-010-060FF-ALA-SET-06.000	10	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.16	22.0	17.50	
		<i>0.236</i>	<i>0.236</i>				<i>0.636</i>	<i>0.866</i>	<i>0.689</i>	
# P-XL-010-063FF-ALA-SET-04.763	10	6.4	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.16	22.2	17.46	9.53
		<i>0.252</i>	<i>0.188</i>				<i>0.636</i>	<i>0.874</i>	<i>0.687</i>	<i>0.375</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-010-095SF-PFR-FLC-04.000	10	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	16.16	22.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-010-095SF-PFR-NIL-04.000	10	9.5	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	16.16	22.0	20.60	17.500 (Flanged Side) 9.600 (Unflanged Side)
		<i>0.374</i>	<i>0.157</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	
# P-XL-010-095SF-PFR-ALS-04.000	10	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	16.16	22.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-010-095SF-PFR-AIS-04.000	10	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	16.16	22.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.157</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	
# P-XL-010-095FF-PFR-NIL-04.000	10	9.5	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	16.16	22.0	20.60	17.50
		<i>0.374</i>	<i>0.157</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-010-095FF-PFR-FLC-04.000	10	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	16.16	22.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	<i>0.512</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-010-095FF-PFR-AIS-04.000	10	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	16.16	22.0	20.60	17.50
		<i>0.374</i>	<i>0.157</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-010-095FF-PFR-ALS-04.000	10	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	16.16	22.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-010-096FF-ALA-SNH-04.763	10	9.5	4.763	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	16.16	22.2	14.29	No Hub
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.874</i>	<i>0.563</i>	
# P-XL-010-096SF-PFR-AIS-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	16.16	22.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-010-096FF-SBX-SNH-04.763	10	9.5	4.763	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	16.16	22.2	13.89	
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.874</i>	<i>0.547</i>	
# P-XL-010-096FF-SBX-SET-04.763	10	9.5	4.763	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	16.16	22.2	20.64	11.11
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.874</i>	<i>0.813</i>	<i>0.437</i>
# P-XL-010-096FF-PFR-SET-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	16.16	22.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-010-096FF-PFR-NIL-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	16.16	22.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-010-096FF-PFR-FLC-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	16.16	22.1	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-010-096FF-PFR-ALS-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	16.16	22.1	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-010-096SF-PFR-ALS-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	16.16	22.1	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-010-096FF-PFR-AIS-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	16.16	22.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-010-096SF-PFR-FLC-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	16.16	22.1	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-010-096FF-ALU-SET-04.763	10	9.5	4.763	Aluminium	Set Screw	FF_G_H (Double Flange)	16.16	23.8	20.64	11.11
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.937</i>	<i>0.813</i>	<i>0.437</i>
# P-XL-010-096FF-ACE-NIL-04.763	10	9.5	4.763	Acetal	No Locking Device	FF_NL_HW (Double Flange)	16.16	21.8	25.40	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.858</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-010-096SF-PFR-NIL-04.763	10	9.5	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	16.16	22.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.687</i>
P-XL-010-096FF-ALA-SET-04.763	10	9.5	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.16	22.2	20.64	11.11
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.874</i>	<i>0.813</i>	<i>0.437</i>
# P-XL-010-096SF-ACE-NIL-04.763	10	9.5	4.763	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	16.16	22.2	25.40	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>	<i>0.874</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-010-096P-ALA-SET-04.763	10	9.5	4.763	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	16.16		20.64	11.11
		<i>0.374</i>	<i>0.188</i>				<i>0.636</i>		<i>0.813</i>	<i>0.437</i>
# P-XL-010-095SF-PFR-AIS-05.000	10	9.5	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	16.16	22.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.197</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-010-095FF-PFR-AIS-05.000	10	9.5	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	16.16	22.0	20.60	17.50
		<i>0.374</i>	<i>0.197</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>
P-XL-010-095FF-ALA-SNH-06.000	10	9.5	6.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	16.16	22.0	14.20	
		<i>0.374</i>	<i>0.236</i>				<i>0.636</i>	<i>0.866</i>	<i>0.559</i>	
# P-XL-010-095SF-PFR-AIS-06.000	10	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	16.16	22.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	
# P-XL-010-095SF-ACE-NIL-06.000	10	9.5	6.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	16.16	22.0	25.40	12.70
		<i>0.374</i>	<i>0.236</i>				<i>0.636</i>	<i>0.866</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-010-095P-ALA-SET-06.000	10	9.5	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	16.16		20.30	11.00
		<i>0.374</i>	<i>0.236</i>				<i>0.636</i>		<i>0.799</i>	<i>0.433</i>
P-XL-010-095FF-SBX-SNH-06.000	10	9.5	6.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	16.16	22.0	13.80	
		<i>0.374</i>	<i>0.236</i>				<i>0.636</i>	<i>0.866</i>	<i>0.543</i>	
P-XL-010-095FF-PFR-AIS-06.000	10	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	16.16	22.0	20.60	17.50
		<i>0.374</i>	<i>0.236</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-010-095FF-ALA-SET-06.000	10	9.5	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.16	22.0	20.60	
		<i>0.374</i>	<i>0.236</i>				<i>0.636</i>	<i>0.866</i>	<i>0.811</i>	
# P-XL-010-096SF-PFR-AIS-06.350	10	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	16.16	22.1	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-010-096FF-ALA-SNH-06.350	10	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	16.16	22.2	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>0.636</i>	<i>0.874</i>	<i>0.563</i>	
# P-XL-010-096FF-SBX-SNH-06.350	10	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	16.16	22.2	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>0.636</i>	<i>0.874</i>	<i>0.547</i>	
# P-XL-010-096P-ALA-SET-06.350	10	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	16.16		20.64	11.11
		<i>0.374</i>	<i>0.250</i>				<i>0.636</i>		<i>0.813</i>	<i>0.437</i>
# P-XL-010-096FF-SBX-SET-06.350	10	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	16.16	22.2	20.64	11.11
		<i>0.374</i>	<i>0.250</i>				<i>0.636</i>	<i>0.874</i>	<i>0.813</i>	<i>0.437</i>
P-XL-010-096FF-PFR-AIS-06.350	10	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	16.16	22.1	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.636</i>	<i>0.870</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-010-096FF-ALA-SET-06.350	10	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	16.16	22.2	20.64	11.11
		<i>0.374</i>	<i>0.250</i>				<i>0.636</i>	<i>0.874</i>	<i>0.813</i>	<i>0.437</i>
# P-XL-010-096SF-NFR-SET-06.363	10	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_H (Single Flange)	16.16	22.1	22.62	15.08
		<i>0.374</i>	<i>0.251</i>				<i>0.636</i>	<i>0.870</i>	<i>0.891</i>	<i>0.594</i>
# P-XL-010-096FF-NFR-SET-06.363	10	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	16.16	22.1	23.42	15.08
		<i>0.374</i>	<i>0.251</i>				<i>0.636</i>	<i>0.870</i>	<i>0.922</i>	<i>0.594</i>
# P-XL-011-060FF-ALA-SET-06.000	11	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.78	24.0	17.50	11.00
		<i>0.236</i>	<i>0.236</i>				<i>0.700</i>	<i>0.945</i>	<i>0.689</i>	<i>0.433</i>
# P-XL-011-063FF-ALA-SET-04.763	11	6.4	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.78	23.8	17.46	11.11
		<i>0.252</i>	<i>0.188</i>				<i>0.700</i>	<i>0.937</i>	<i>0.687</i>	<i>0.437</i>
# P-XL-011-063FF-ALA-SET-06.350	11	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.78	23.8	17.46	11.11
		<i>0.252</i>	<i>0.250</i>				<i>0.700</i>	<i>0.937</i>	<i>0.687</i>	<i>0.437</i>
# P-XL-011-095FF-PFR-NIL-04.000	11	9.5	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	17.78	24.0	20.60	17.50
		<i>0.374</i>	<i>0.157</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-011-095FF-PFR-FLC-04.000	11	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	17.78	24.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-011-095SF-PFR-FLC-04.000	11	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	17.78	24.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-011-095SF-PFR-ALS-04.000	11	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	17.78	24.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-011-095SF-PFR-NIL-04.000	11	9.5	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	17.78	24.0	20.60	17.500 (Flanged Side) 9.600 (Unflanged Side)
		<i>0.374</i>	<i>0.157</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	
# P-XL-011-095FF-PFR-AIS-04.000	11	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.78	24.0	20.60	17.50
		<i>0.374</i>	<i>0.157</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-011-095SF-PFR-AIS-04.000	11	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	17.78	24.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.157</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-011-095FF-PFR-ALS-04.000	11	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	17.78	24.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-011-096FF-PFR-AIS-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	17.78	23.6	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-011-096FF-PFR-ALS-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	17.78	23.6	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-011-096FF-ALU-SET-04.763	11	9.5	4.763	Aluminium	Set Screw	FF_G_H (Double Flange)	17.78	23.8	20.64	11.11
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.937</i>	<i>0.813</i>	<i>0.437</i>
# P-XL-011-096FF-PFR-FLC-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	17.78	23.6	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-011-096FF-ALA-SNH-04.763	11	9.5	4.763	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	17.78	23.8	14.29	No Hub
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.937</i>	<i>0.563</i>	
# P-XL-011-096FF-PFR-NIL-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	17.78	23.6	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-011-096FF-ALA-SET-04.763	11	9.5	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.78	23.8	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.937</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-011-096SF-PFR-NIL-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	17.78	23.6	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-011-096SF-PFR-AIS-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	17.78	23.6	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-011-096SF-PFR-FLC-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	17.78	23.6	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-011-096SF-PFR-ALS-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	17.78	23.6	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-011-096FF-PFR-SET-04.763	11	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	17.78	23.6	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-011-096FF-SBX-SET-04.763	11	9.5	4.763	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	17.78	23.8	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.937</i>	<i>0.813</i>	<i>0.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-011-096FF-SBX-SNH-04.763	11	9.5	4.763	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	17.78	23.8	13.89	
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.937</i>	<i>0.547</i>	
# P-XL-011-096P-ALA-SET-04.763	11	9.5	4.763	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	17.78		20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>		<i>0.813</i>	<i>0.500</i>
# P-XL-011-096SF-ACE-NIL-04.763	11	9.5	4.763	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	17.78	23.8	25.40	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.937</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-011-096FF-ACE-NIL-04.763	11	9.5	4.763	Acetal	No Locking Device	FF_NL_HW (Double Flange)	17.78	23.4	25.40	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.700</i>	<i>0.921</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-011-095FF-PFR-AIS-05.000	11	9.5	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.78	24.0	20.60	17.50
		<i>0.374</i>	<i>0.197</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-011-095SF-PFR-AIS-05.000	11	9.5	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	17.78	24.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.197</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	
P-XL-011-095FF-PFR-AIS-06.000	11	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	17.78	24.0	20.60	17.50
		<i>0.374</i>	<i>0.236</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-011-095SF-PFR-AIS-06.000	11	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	17.78	24.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	
# P-XL-011-095SF-ACE-NIL-06.000	11	9.5	6.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	17.78	24.0	25.40	12.70
		<i>0.374</i>	<i>0.236</i>				<i>0.700</i>	<i>0.945</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-011-095FF-SBX-SNH-06.000	11	9.5	6.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	17.78	24.0	13.80	
		<i>0.374</i>	<i>0.236</i>				<i>0.700</i>	<i>0.945</i>	<i>0.543</i>	
# P-XL-011-095FF-ALA-SNH-06.000	11	9.5	6.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	17.78	24.0	14.20	
		<i>0.374</i>	<i>0.236</i>				<i>0.700</i>	<i>0.945</i>	<i>0.559</i>	
# P-XL-011-095P-ALA-SET-06.000	11	9.5	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	17.78		20.30	13.00
		<i>0.374</i>	<i>0.236</i>				<i>0.700</i>		<i>0.799</i>	<i>0.512</i>
# P-XL-011-095FF-ALA-SET-06.000	11	9.5	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.78	24.0	20.60	11.00
		<i>0.374</i>	<i>0.236</i>				<i>0.700</i>	<i>0.945</i>	<i>0.811</i>	<i>0.433</i>
# P-XL-011-096FF-SBX-SNH-06.350	11	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	17.78	23.8	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>0.700</i>	<i>0.937</i>	<i>0.547</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-011-096SF-PFR-AIS-06.350	11	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	17.78	23.6	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-011-096FF-PFR-AIS-06.350	11	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	17.78	23.6	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.700</i>	<i>0.929</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-011-096FF-SBX-SET-06.350	11	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	17.78	23.8	20.64	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.700</i>	<i>0.937</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-011-096FF-ALA-SET-06.350	11	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	17.78	23.8	20.64	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.700</i>	<i>0.937</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-011-096FF-ALA-SNH-06.350	11	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	17.78	23.8	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>0.700</i>	<i>0.937</i>	<i>0.563</i>	
# P-XL-011-096P-ALA-SET-06.350	11	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	17.78		20.64	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.700</i>		<i>0.813</i>	<i>0.500</i>
# P-XL-011-096SF-NFR-SET-06.363	11	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_H (Single Flange)	17.78	23.9	22.62	15.08
		<i>0.374</i>	<i>0.251</i>				<i>0.700</i>	<i>0.941</i>	<i>0.891</i>	<i>0.594</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-011-096FF-NFR-SET-06.363	11	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	17.78	23.9	23.42	15.08
		<i>0.374</i>	<i>0.251</i>				<i>0.700</i>	<i>0.941</i>	<i>0.922</i>	<i>0.594</i>
# P-XL-012-060FF-ALA-SET-06.000	12	6.0	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.40	25.0	17.50	13.00
		<i>0.236</i>	<i>0.236</i>				<i>0.764</i>	<i>0.984</i>	<i>0.689</i>	<i>0.512</i>
# P-XL-012-063FF-ALA-SET-04.763	12	6.4	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.40	25.4	17.46	12.70
		<i>0.252</i>	<i>0.188</i>				<i>0.764</i>	<i>1.000</i>	<i>0.687</i>	<i>0.500</i>
# P-XL-012-063FF-ALA-SET-06.350	12	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.40	25.4	17.46	12.70
		<i>0.252</i>	<i>0.250</i>				<i>0.764</i>	<i>1.000</i>	<i>0.687</i>	<i>0.500</i>
# P-XL-012-095FF-PFR-ALS-04.000	12	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	19.40	25.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-012-095SF-PFR-ALS-04.000	12	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	19.40	25.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.512</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-012-095SF-PFR-NIL-04.000	12	9.5	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	19.40	25.0	20.60	17.500 (Flanged Side) 9.600 (Unflanged Side)
		<i>0.374</i>	<i>0.157</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	
# P-XL-012-095SF-PFR-AIS-04.000	12	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	19.40	25.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.157</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	
# P-XL-012-095FF-PFR-FLC-04.000	12	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	19.40	25.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-012-095FF-PFR-AIS-04.000	12	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.40	25.0	20.60	17.50
		<i>0.374</i>	<i>0.157</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-012-095SF-PFR-FLC-04.000	12	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	19.40	25.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-012-095FF-PFR-NIL-04.000	12	9.5	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	19.40	25.0	20.60	17.50
		<i>0.374</i>	<i>0.157</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-012-096FF-ALA-SNH-04.763	12	9.5	4.763	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	19.40	25.4	14.29	No Hub
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>1.000</i>	<i>0.563</i>	
# P-XL-012-096FF-ALU-SET-04.763	12	9.5	4.763	Aluminium	Set Screw	FF_G_H (Double Flange)	19.40	25.4	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>1.000</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-096FF-PFR-ALS-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	19.40	25.1	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-096FF-PFR-FLC-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	19.40	25.1	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-096FF-PFR-NIL-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	19.40	25.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-012-096FF-ALA-SET-04.763	12	9.5	4.763	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.40	25.4	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>1.000</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-096FF-ACE-NIL-04.763	12	9.5	4.763	Acetal	No Locking Device	FF_NL_HW (Double Flange)	19.40	25.4	25.40	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>1.000</i>	<i>1.000</i>	<i>0.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-012-096SF-PFR-NIL-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	19.40	25.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-012-096FF-PFR-SET-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	19.40	25.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-012-096FF-SBX-SET-04.763	12	9.5	4.763	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	19.40	25.4	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>1.000</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-096FF-SBX-SNH-04.763	12	9.5	4.763	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	19.40	25.4	13.89	
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>1.000</i>	<i>0.547</i>	
# P-XL-012-096P-ALA-SET-04.763	12	9.5	4.763	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	19.40		20.64	14.29
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>		<i>0.813</i>	<i>0.563</i>
# P-XL-012-096SF-ACE-NIL-04.763	12	9.5	4.763	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	19.40	25.4	25.40	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>1.000</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-012-096SF-PFR-AIS-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	19.40	25.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-012-096SF-PFR-FLC-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	19.40	25.1	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-096FF-PFR-AIS-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	19.40	25.1	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-012-096SF-PFR-ALS-04.763	12	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	19.40	25.1	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-095FF-PFR-AIS-05.000	12	9.5	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.40	25.0	20.60	17.50
		<i>0.374</i>	<i>0.197</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-012-095SF-PFR-AIS-05.000	12	9.5	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	19.40	25.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.197</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	
# P-XL-012-095FF-PFR-AIS-06.000	12	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	19.40	25.0	20.60	17.50
		<i>0.374</i>	<i>0.236</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-XL-012-095FF-ALA-SNH-06.000	12	9.5	6.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	19.40	25.0	14.20	
		<i>0.374</i>	<i>0.236</i>				<i>0.764</i>	<i>0.984</i>	<i>0.559</i>	
# P-XL-012-095FF-ALA-SET-06.000	12	9.5	6.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.40	25.0	20.60	13.00
		<i>0.374</i>	<i>0.236</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-012-095FF-SBX-SNH-06.000	12	9.5	6.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	19.40	25.0	13.80	
		<i>0.374</i>	<i>0.236</i>				<i>0.764</i>	<i>0.984</i>	<i>0.543</i>	
# P-XL-012-095P-ALA-SET-06.000	12	9.5	6.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	19.40		20.30	14.00
		<i>0.374</i>	<i>0.236</i>				<i>0.764</i>		<i>0.799</i>	<i>0.551</i>
# P-XL-012-095SF-ACE-NIL-06.000	12	9.5	6.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	19.40	25.0	25.40	12.70
		<i>0.374</i>	<i>0.236</i>				<i>0.764</i>	<i>0.984</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-012-095SF-PFR-AIS-06.000	12	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	19.40	25.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>0.764</i>	<i>0.984</i>	<i>0.811</i>	
# P-XL-012-096FF-ALA-SNH-06.350	12	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	19.40	25.4	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>0.764</i>	<i>1.000</i>	<i>0.563</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-012-096FF-SBX-SNH-06.350	12	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	19.40	25.4	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>0.764</i>	<i>1.000</i>	<i>0.547</i>	
# P-XL-012-096P-ALA-SET-06.350	12	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	19.40		20.64	14.29
		<i>0.374</i>	<i>0.250</i>				<i>0.764</i>		<i>0.813</i>	<i>0.563</i>
P-XL-012-096FF-ALA-SET-06.350	12	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.40	25.4	20.64	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.764</i>	<i>1.000</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-096FF-PFR-AIS-06.350	12	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	19.40	25.1	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-012-096FF-SBX-SET-06.350	12	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	19.40	25.4	20.64	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.764</i>	<i>1.000</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-012-096SF-PFR-AIS-06.350	12	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	19.40	25.1	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.764</i>	<i>0.988</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-012-096FF-NFR-SET-06.363	12	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	19.40	25.4	23.42	19.05
		<i>0.374</i>	<i>0.251</i>				<i>0.764</i>	<i>1.000</i>	<i>0.922</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-012-096SF-NFR-SET-06.363	12	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_H (Single Flange)	19.40	25.4	22.62	19.05
		<i>0.374</i>	<i>0.251</i>				<i>0.764</i>	<i>1.000</i>	<i>0.891</i>	<i>0.750</i>
P-XL-012-096FF-ALA-SET-07.938	12	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	19.40	25.4	20.64	12.70
		<i>0.374</i>	<i>0.313</i>				<i>0.764</i>	<i>1.000</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-013-063FF-ALA-SET-06.350	13	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	21.01	27.0	17.46	14.29
		<i>0.252</i>	<i>0.250</i>				<i>0.827</i>	<i>1.063</i>	<i>0.687</i>	<i>0.563</i>
P-XL-013-095FF-PFR-AIS-04.000	13	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	21.01	27.0	20.60	17.50
		<i>0.374</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-013-095SF-PFR-ALS-04.000	13	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	21.01	27.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-013-095SF-PFR-NIL-04.000	13	9.5	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	21.01	27.0	20.60	17.500 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-013-095FF-PFR-ALS-04.000	13	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	21.01	27.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-013-095FF-PFR-FLC-04.000	13	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	21.01	27.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-013-095FF-PFR-NIL-04.000	13	9.5	4.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	21.01	27.0	20.60	17.50
		<i>0.374</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-013-095SF-PFR-AIS-04.000	13	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	21.01	27.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	
# P-XL-013-095SF-PFR-FLC-04.000	13	9.5	4.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	21.01	27.0	20.60	13.00
		<i>0.374</i>	<i>0.157</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.512</i>
# P-XL-013-096FF-PFR-FLC-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	21.01	26.9	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-013-096FF-PFR-SET-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	21.01	26.9	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-013-096SF-PFR-AIS-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	21.01	26.9	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-013-096SF-PFR-NIL-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	21.01	26.9	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-013-096SF-PFR-FLC-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	21.01	26.9	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-013-096FF-PFR-ALS-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	21.01	26.9	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.500</i>
# P-XL-013-096SF-PFR-ALS-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	21.01	26.9	20.64	12.70
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-013-096FF-PFR-AIS-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	21.01	26.9	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-013-096FF-PFR-NIL-04.763	13	9.5	4.763	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	21.01	26.9	20.64	17.46
		<i>0.374</i>	<i>0.188</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-013-095FF-PFR-AIS-05.000	13	9.5	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	21.01	27.0	20.60	17.50
		<i>0.374</i>	<i>0.197</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>
# P-XL-013-095SF-PFR-AIS-05.000	13	9.5	5.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	21.01	27.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.197</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	
# P-XL-013-095SF-PFR-AIS-06.000	13	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	21.01	27.0	20.60	17.500 (Flanged Side) 9.500 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	
P-XL-013-095FF-PFR-AIS-06.000	13	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	21.01	27.0	20.60	17.50
		<i>0.374</i>	<i>0.236</i>				<i>0.827</i>	<i>1.063</i>	<i>0.811</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-013-096FF-ALA-SET-06.350	13	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	21.01	27.0	20.64	14.29
		<i>0.374</i>	<i>0.250</i>				<i>0.827</i>	<i>1.063</i>	<i>0.813</i>	<i>0.563</i>
# P-XL-013-096SF-PFR-AIS-06.350	13	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	21.01	26.9	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-013-096FF-PFR-AIS-06.350	13	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	21.01	26.9	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.827</i>	<i>1.059</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-013-096FF-NFR-SET-06.363	13	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	21.01	26.7	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>0.827</i>	<i>1.051</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-013-096SF-NFR-SET-06.363	13	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_H (Single Flange)	21.01	26.7	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>0.827</i>	<i>1.051</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-014-060FF-ALA-SET-08.000	14	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.63	28.0	17.50	14.00
		<i>0.236</i>	<i>0.315</i>				<i>0.891</i>	<i>1.102</i>	<i>0.689</i>	<i>0.551</i>
# P-XL-014-063FF-ALA-SET-06.350	14	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.63	27.8	17.46	14.29
		<i>0.252</i>	<i>0.250</i>				<i>0.891</i>	<i>1.094</i>	<i>0.687</i>	<i>0.563</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-014-063FF-ALA-SET-07.938	14	6.4	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.63	27.8	17.46	14.29
		<i>0.252</i>	<i>0.313</i>				<i>0.891</i>	<i>1.094</i>	<i>0.687</i>	<i>0.563</i>
# P-XL-014-095SF-PFR-FLC-06.000	14	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	22.63	28.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-014-095SF-PFR-ALS-06.000	14	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	22.63	28.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-014-095SF-PFR-AIS-06.000	14	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	22.63	28.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	
# P-XL-014-095FF-PFR-FLC-06.000	14	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	22.63	28.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-014-095FF-PFR-NIL-06.000	14	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	22.63	28.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	<i>0.748</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-014-095SF-PFR-NIL-06.000	14	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	22.63	28.0	20.60	19.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	
P-XL-014-095FF-PFR-AIS-06.000	14	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	22.63	28.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-014-095FF-PFR-ALS-06.000	14	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	22.63	28.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-014-096FF-ACE-NIL-06.350	14	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	22.63	28.6	25.40	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.126</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-014-096FF-PFR-FLC-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096FF-PFR-NIL-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-014-096FF-PFR-AIS-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096FF-PFR-SET-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096FF-ALU-SET-06.350	14	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	22.63	28.6	20.64	14.29
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.126</i>	<i>0.813</i>	<i>0.563</i>
# P-XL-014-096FF-SBX-SET-06.350	14	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	22.63	27.8	20.64	14.29
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.094</i>	<i>0.813</i>	<i>0.563</i>
# P-XL-014-096FF-ALA-SNH-06.350	14	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	22.63	27.8	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.094</i>	<i>0.563</i>	
# P-XL-014-096SF-PFR-ALS-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096FF-ALA-SET-06.350	14	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.63	27.8	20.64	14.29
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.094</i>	<i>0.813</i>	<i>0.563</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-014-096SF-PFR-AIS-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096FF-PFR-ALS-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096SF-PFR-NIL-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096P-ALA-SET-06.350	14	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	22.63		20.64	15.88
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>		<i>0.813</i>	<i>0.625</i>
# P-XL-014-096SF-ACE-NIL-06.350	14	9.5	6.350	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	22.63	28.6	25.40	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.126</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-014-096SF-PFR-FLC-06.350	14	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096FF-SBX-SNH-06.350	14	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	22.63	27.8	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>0.891</i>	<i>1.094</i>	<i>0.547</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-014-096SF-NFR-SET-06.363	14	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_H (Single Flange)	22.63	28.7	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>0.891</i>	<i>1.130</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-014-096FF-NFR-SET-06.363	14	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	22.63	28.7	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>0.891</i>	<i>1.130</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-014-096FF-PFR-AIS-07.938	14	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096FF-SBX-SET-07.938	14	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	22.63	27.8	20.64	14.29
		<i>0.374</i>	<i>0.313</i>				<i>0.891</i>	<i>1.094</i>	<i>0.813</i>	<i>0.563</i>
# P-XL-014-096FF-ALA-SET-07.938	14	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.63	27.8	20.64	14.29
		<i>0.374</i>	<i>0.313</i>				<i>0.891</i>	<i>1.094</i>	<i>0.813</i>	<i>0.563</i>
# P-XL-014-096SF-PFR-AIS-07.938	14	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096P-ALA-SET-07.938	14	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	22.63		20.64	15.88
		<i>0.374</i>	<i>0.313</i>				<i>0.891</i>		<i>0.813</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-014-095FF-PFR-AIS-08.000	14	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	22.63	28.0	20.60	19.00
		<i>0.374</i>	<i>0.315</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-014-095FF-ALA-SNH-08.000	14	9.5	8.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	22.63	28.0	14.20	
		<i>0.374</i>	<i>0.315</i>				<i>0.891</i>	<i>1.102</i>	<i>0.559</i>	
P-XL-014-095FF-SBX-SNH-08.000	14	9.5	8.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	22.63	28.0	13.80	
		<i>0.374</i>	<i>0.315</i>				<i>0.891</i>	<i>1.102</i>	<i>0.543</i>	
# P-XL-014-095P-ALA-SET-08.000	14	9.5	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	22.63		20.30	16.00
		<i>0.374</i>	<i>0.315</i>				<i>0.891</i>		<i>0.799</i>	<i>0.630</i>
# P-XL-014-095FF-ALA-SET-08.000	14	9.5	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	22.63	28.0	20.60	14.00
		<i>0.374</i>	<i>0.315</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	<i>0.551</i>
# P-XL-014-095SF-ACE-NIL-08.000	14	9.5	8.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	22.63	29.0	25.40	12.70
		<i>0.374</i>	<i>0.315</i>				<i>0.891</i>	<i>1.142</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-014-095SF-PFR-AIS-08.000	14	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	22.63	28.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>0.891</i>	<i>1.102</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-014-096FF-PFR-AIS-09.525	14	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096SF-PFR-AIS-09.525	14	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	22.63	28.4	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>0.891</i>	<i>1.118</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-014-096FF-ALA-SNH-09.525	14	9.5	9.530	Aluminium	Set Screw	FF_G_H (Double Flange)	22.63	27.8		
		<i>0.374</i>	<i>0.375</i>				<i>0.891</i>	<i>1.094</i>		
P-XL-015-060FF-ALA-SET-08.000	15	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.0	17.50	16.00
		<i>0.236</i>	<i>0.315</i>				<i>0.955</i>	<i>1.181</i>	<i>0.689</i>	<i>0.630</i>
# P-XL-015-063FF-ALA-SET-06.350	15	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.2	17.46	15.88
		<i>0.252</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.687</i>	<i>0.625</i>
# P-XL-015-063FF-ALA-SET-07.938	15	6.4	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.2	17.46	15.88
		<i>0.252</i>	<i>0.313</i>				<i>0.955</i>	<i>1.189</i>	<i>0.687</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-015-095SF-PFR-NIL-06.000	15	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	24.25	30.0	20.60	19.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	
# P-XL-015-095SF-PFR-AIS-06.000	15	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	24.25	30.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	
# P-XL-015-095FF-PFR-AIS-06.000	15	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	24.25	30.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-015-095SF-PFR-FLC-06.000	15	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	24.25	30.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-015-095FF-PFR-ALS-06.000	15	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	24.25	30.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-015-095FF-PFR-FLC-06.000	15	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	24.25	30.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-015-095FF-PFR-NIL-06.000	15	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	24.25	30.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-015-095SF-PFR-ALS-06.000	15	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	24.25	30.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
P-XL-015-096FF-PFR-AIS-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-SBX-SET-06.350	15	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	15.88
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.625</i>
# P-XL-015-096FF-PFR-FLC-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-PFR-SET-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
P-XL-015-096FF-SBX-SNH-06.350	15	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	24.25	30.2	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.547</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-015-096P-ALA-SET-06.350	15	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	24.25		22.23	17.46
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>		<i>0.875</i>	<i>0.687</i>
# P-XL-015-096SF-ACE-NIL-06.350	15	9.5	6.350	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	24.25	30.2	25.40	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-015-096SF-PFR-AIS-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096SF-PFR-ALS-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-ALU-SET-06.350	15	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	15.88
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.625</i>
# P-XL-015-096SF-PFR-NIL-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-PFR-ALS-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-015-096SF-PFR-FLC-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-PFR-NIL-06.350	15	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
P-XL-015-096FF-ALA-SNH-06.350	15	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	24.25	30.2	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.563</i>	
P-XL-015-096FF-ALA-SET-06.350	15	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	15.88
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.625</i>
# P-XL-015-096FF-ACE-NIL-06.350	15	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	24.25	30.2	25.40	12.70
		<i>0.374</i>	<i>0.250</i>				<i>0.955</i>	<i>1.189</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-015-096SF-NFR-SET-06.363	15	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	24.25	30.0	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>0.955</i>	<i>1.181</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-015-096FF-NFR-SET-06.363	15	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	24.25	30.0	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>0.955</i>	<i>1.181</i>	<i>0.922</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-015-096FF-SBX-SET-07.938	15	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	15.88
		<i>0.374</i>	<i>0.313</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.625</i>
# P-XL-015-096P-ALA-SET-07.938	15	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	24.25		22.23	17.46
		<i>0.374</i>	<i>0.313</i>				<i>0.955</i>		<i>0.875</i>	<i>0.687</i>
# P-XL-015-096FF-SBX-SNH-07.938	15	9.5	7.938	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	24.25	30.2	13.89	
		<i>0.374</i>	<i>0.313</i>				<i>0.955</i>	<i>1.189</i>	<i>0.547</i>	
# P-XL-015-096FF-ALA-SNH-07.938	15	9.5	7.938	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	24.25	30.2	14.29	No Hub
		<i>0.374</i>	<i>0.313</i>				<i>0.955</i>	<i>1.189</i>	<i>0.563</i>	
# P-XL-015-096SF-PFR-AIS-07.938	15	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-ALA-SET-07.938	15	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	15.88
		<i>0.374</i>	<i>0.313</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.625</i>
# P-XL-015-096FF-PFR-AIS-07.938	15	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-015-095FF-ALA-SNH-08.000	15	9.5	8.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	24.25	30.0	14.20	
		<i>0.374</i>	<i>0.315</i>				<i>0.955</i>	<i>1.181</i>	<i>0.559</i>	
# P-XL-015-095SF-PFR-AIS-08.000	15	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	24.25	30.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	
P-XL-015-095FF-SBX-SNH-08.000	15	9.5	8.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	24.25	30.0	13.80	
		<i>0.374</i>	<i>0.315</i>				<i>0.955</i>	<i>1.181</i>	<i>0.543</i>	
# P-XL-015-095FF-ALA-SET-08.000	15	9.5	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.0	20.60	16.00
		<i>0.374</i>	<i>0.315</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.630</i>
# P-XL-015-095SF-ACE-NIL-08.000	15	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	24.25	30.0	23.80	12.70
		<i>0.374</i>	<i>0.315</i>				<i>0.955</i>	<i>1.181</i>	<i>0.937</i>	<i>0.500</i>
# P-XL-015-095FF-PFR-AIS-08.000	15	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	24.25	30.0	20.60	19.00
		<i>0.374</i>	<i>0.315</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-015-095P-ALA-SET-08.000	15	9.5	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	24.25		22.20	17.00
		<i>0.374</i>	<i>0.315</i>				<i>0.955</i>		<i>0.874</i>	<i>0.669</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-015-096SF-PFR-AIS-09.525	15	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096P-ALA-SET-09.525	15	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	24.25		22.23	17.46
		<i>0.374</i>	<i>0.375</i>				<i>0.955</i>		<i>0.875</i>	<i>0.687</i>
# P-XL-015-096FF-SBX-SET-09.525	15	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-PFR-AIS-09.525	15	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
P-XL-015-096FF-ALA-SET-09.525	15	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-ALA-SET-12.700	15	9.5	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.500</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-015-096FF-SBX-SET-12.700	15	9.5	12.700	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	24.25	30.2	20.64	19.05
		<i>0.374</i>	<i>0.500</i>				<i>0.955</i>	<i>1.189</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-015-095FF-ALA-SET-10.000	15	9.5	10.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	24.25	30.0	20.60	16.00
		<i>0.374</i>	<i>0.394</i>				<i>0.955</i>	<i>1.181</i>	<i>0.811</i>	<i>0.630</i>
# P-XL-016-060FF-ALA-SET-08.000	16	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.86	32.0	17.50	17.00
		<i>0.236</i>	<i>0.315</i>				<i>1.018</i>	<i>1.260</i>	<i>0.689</i>	<i>0.669</i>
# P-XL-016-063FF-ALA-SET-06.350	16	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.86	31.8	17.46	17.46
		<i>0.252</i>	<i>0.250</i>				<i>1.018</i>	<i>1.252</i>	<i>0.687</i>	<i>0.687</i>
# P-XL-016-063FF-ALA-SET-07.938	16	6.4	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.86	31.8	17.46	17.46
		<i>0.252</i>	<i>0.313</i>				<i>1.018</i>	<i>1.252</i>	<i>0.687</i>	<i>0.687</i>
# P-XL-016-095SF-PFR-AIS-06.000	16	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	25.86	32.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	
# P-XL-016-095SF-PFR-NIL-06.000	16	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	25.86	32.0	20.60	19.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-016-095SF-PFR-FLC-06.000	16	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	25.86	32.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-016-095SF-PFR-ALS-06.000	16	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	25.86	32.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-016-095FF-PFR-NIL-06.000	16	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	25.86	32.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-016-095FF-PFR-ALS-06.000	16	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	25.86	32.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-016-095FF-PFR-AIS-06.000	16	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	25.86	32.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-016-095FF-PFR-FLC-06.000	16	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	25.86	32.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-016-096FF-PFR-ALS-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-016-096FF-PFR-FLC-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096FF-PFR-AIS-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096FF-PFR-NIL-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096FF-ALU-SET-06.350	16	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	25.86	31.8	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.252</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-016-096FF-PFR-SET-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096FF-ALA-SNH-06.350	16	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	25.86	31.8	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.252</i>	<i>0.563</i>	
# P-XL-016-096FF-SBX-SET-06.350	16	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	25.86	31.8	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.252</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-016-096FF-SBX-SNH-06.350	16	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	25.86	31.8	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.252</i>	<i>0.547</i>	
# P-XL-016-096P-ALA-SET-06.350	16	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	25.86		22.23	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>		<i>0.875</i>	<i>0.750</i>
# P-XL-016-096FF-ACE-NIL-06.350	16	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	25.86	31.8	25.40	12.70
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.252</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-016-096SF-PFR-FLC-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096SF-PFR-ALS-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096SF-PFR-AIS-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096SF-PFR-NIL-06.350	16	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-016-096SF-ACE-NIL-06.350	16	9.5	6.350	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	25.86	31.8	25.40	12.70
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.252</i>	<i>1.000</i>	<i>0.500</i>
# P-XL-016-096FF-ALA-SET-06.350	16	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.86	31.8	20.64	17.46
		<i>0.374</i>	<i>0.250</i>				<i>1.018</i>	<i>1.252</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-016-096SF-NFR-SET-06.363	16	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	25.86	31.5	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.018</i>	<i>1.240</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-016-096FF-NFR-SET-06.363	16	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	25.86	31.5	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.018</i>	<i>1.240</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-016-096FF-PFR-AIS-07.938	16	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096FF-ALA-SNH-07.938	16	9.5	7.938	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	25.86	31.8	14.29	No Hub
		<i>0.374</i>	<i>0.313</i>				<i>1.018</i>	<i>1.252</i>	<i>0.563</i>	
# P-XL-016-096P-ALA-SET-07.938	16	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	25.86		22.23	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.018</i>		<i>0.875</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-016-096FF-SBX-SET-07.938	16	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	25.86	31.8	20.64	17.46
		<i>0.374</i>	<i>0.313</i>				<i>1.018</i>	<i>1.252</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-016-096FF-ALA-SET-07.938	16	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.86	31.8	20.64	17.46
		<i>0.374</i>	<i>0.313</i>				<i>1.018</i>	<i>1.252</i>	<i>0.813</i>	<i>0.687</i>
# P-XL-016-096FF-SBX-SNH-07.938	16	9.5	7.938	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	25.86	31.8	13.89	
		<i>0.374</i>	<i>0.313</i>				<i>1.018</i>	<i>1.252</i>	<i>0.547</i>	
# P-XL-016-096SF-PFR-AIS-07.938	16	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-095P-ALA-SET-08.000	16	9.5	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	25.86		22.20	19.00
		<i>0.374</i>	<i>0.315</i>				<i>1.018</i>		<i>0.874</i>	<i>0.748</i>
# P-XL-016-095FF-ALA-SET-08.000	16	9.5	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.86	32.0	20.60	17.00
		<i>0.374</i>	<i>0.315</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	<i>0.669</i>
# P-XL-016-095FF-ALA-SNH-08.000	16	9.5	8.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	25.86	32.0	14.20	
		<i>0.374</i>	<i>0.315</i>				<i>1.018</i>	<i>1.260</i>	<i>0.559</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-016-095FF-SBX-SNH-08.000	16	9.5	8.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	25.86	32.0	13.80	
		<i>0.374</i>	<i>0.315</i>				<i>1.018</i>	<i>1.260</i>	<i>0.543</i>	
# P-XL-016-095SF-ACE-NIL-08.000	16	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	25.86	32.0	23.80	12.70
		<i>0.374</i>	<i>0.315</i>				<i>1.018</i>	<i>1.260</i>	<i>0.937</i>	<i>0.500</i>
# P-XL-016-095SF-PFR-AIS-08.000	16	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	25.86	32.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	
# P-XL-016-095FF-PFR-AIS-08.000	16	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	25.86	32.0	20.60	19.00
		<i>0.374</i>	<i>0.315</i>				<i>1.018</i>	<i>1.260</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-016-096FF-PFR-AIS-09.525	16	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096SF-PFR-AIS-09.525	16	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	25.86	31.5	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>1.018</i>	<i>1.240</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-016-096FF-ALA-SET-09.525	16	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	25.86	31.8	20.64	17.46
		<i>0.374</i>	<i>0.375</i>				<i>1.018</i>	<i>1.252</i>	<i>0.813</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-017-095SF-PFR-AIS-06.000	17	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	27.48	33.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	
# P-XL-017-095SF-PFR-NIL-06.000	17	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	27.48	33.0	20.60	19.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	
# P-XL-017-095SF-PFR-FLC-06.000	17	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	27.48	33.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-017-095SF-PFR-ALS-06.000	17	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	27.48	33.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-017-095FF-PFR-ALS-06.000	17	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	27.48	33.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-017-095FF-PFR-AIS-06.000	17	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	27.48	33.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-017-095FF-PFR-NIL-06.000	17	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking - Hubless	FF_NL_H (Double Flange)	27.48	33.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-017-095FF-PFR-FLC-06.000	17	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	27.48	33.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-017-096FF-PFR-AIS-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096P-ALA-SET-06.350	17	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	27.48		22.23	20.64
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>		<i>0.875</i>	<i>0.813</i>
# P-XL-017-096FF-PFR-SET-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096FF-PFR-NIL-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096FF-PFR-FLC-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-017-096FF-PFR-ALS-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096SF-PFR-FLC-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096FF-ALA-SET-06.350	17	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096SF-PFR-ALS-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096SF-PFR-NIL-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096SF-PFR-AIS-06.350	17	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-017-096FF-NFR-SET-06.363	17	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	27.48	33.3	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.082</i>	<i>1.311</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-017-096SF-NFR-SET-06.363	17	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	27.48	33.3	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.082</i>	<i>1.311</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-017-096SF-PFR-AIS-07.938	17	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096FF-PFR-AIS-07.938	17	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-095SF-PFR-AIS-08.000	17	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	27.48	33.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	
# P-XL-017-095FF-PFR-AIS-08.000	17	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	27.48	33.0	20.60	19.00
		<i>0.374</i>	<i>0.315</i>				<i>1.082</i>	<i>1.299</i>	<i>0.811</i>	<i>0.748</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-017-096FF-PFR-AIS-09.525	17	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-017-096SF-PFR-AIS-09.525	17	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	27.48	33.3	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>1.082</i>	<i>1.311</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-060FF-ALA-SET-08.000	18	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	29.09	35.0	17.50	21.00
		<i>0.236</i>	<i>0.315</i>				<i>1.145</i>	<i>1.378</i>	<i>0.689</i>	<i>0.827</i>
# P-XL-018-063FF-ALA-SET-06.350	18	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	29.09	34.9	17.46	20.64
		<i>0.252</i>	<i>0.250</i>				<i>1.145</i>	<i>1.374</i>	<i>0.687</i>	<i>0.813</i>
# P-XL-018-063FF-ALA-SET-07.938	18	6.4	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	29.09	34.9	17.46	20.64
		<i>0.252</i>	<i>0.313</i>				<i>1.145</i>	<i>1.374</i>	<i>0.687</i>	<i>0.813</i>
# P-XL-018-095SF-PFR-ALS-06.000	18	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	29.09	35.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-018-095SF-PFR-FLC-06.000	18	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	29.09	35.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-018-095SF-PFR-AIS-06.000	18	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	29.09	35.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	
# P-XL-018-095FF-PFR-NIL-06.000	18	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	29.09	35.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-018-095FF-PFR-FLC-06.000	18	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	29.09	35.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
P-XL-018-095FF-PFR-AIS-06.000	18	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	29.09	35.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-018-095SF-PFR-NIL-06.000	18	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	29.09	35.0	20.60	19.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	
# P-XL-018-095FF-PFR-ALS-06.000	18	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	29.09	35.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-018-096FF-ACE-NIL-06.350	18	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	29.09	34.9	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.374</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-018-096FF-PFR-FLC-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096FF-PFR-NIL-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_H (Double Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096FF-PFR-AIS-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096P-ALA-SET-06.350	18	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	29.09		22.23	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>		<i>0.875</i>	<i>0.875</i>
# P-XL-018-096FF-ALU-SET-06.350	18	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	29.09	34.9	20.64	20.64
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.374</i>	<i>0.813</i>	<i>0.813</i>
# P-XL-018-096FF-PFR-SET-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-018-096FF-PFR-ALS-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096FF-ALA-SET-06.350	18	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	29.09	34.9	20.64	20.64
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.374</i>	<i>0.813</i>	<i>0.813</i>
# P-XL-018-096FF-ALA-SNH-06.350	18	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	29.09	34.9	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.374</i>	<i>0.563</i>	
# P-XL-018-096FF-SBX-SNH-06.350	18	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	29.09	34.9	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.374</i>	<i>0.547</i>	
# P-XL-018-096SF-PFR-FLC-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096SF-PFR-ALS-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-018-096SF-PFR-NIL-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2H (Single Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096SF-ACE-NIL-06.350	18	9.5	6.350	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	29.09	34.9	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.374</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-018-096SF-PFR-AIS-06.350	18	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096FF-SBX-SET-06.350	18	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	29.09	34.9	20.64	20.64
		<i>0.374</i>	<i>0.250</i>				<i>1.145</i>	<i>1.374</i>	<i>0.813</i>	<i>0.813</i>
# P-XL-018-096FF-NFR-SET-06.363	18	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	29.09	35.1	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.145</i>	<i>1.382</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-018-096SF-NFR-SET-06.363	18	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	29.09	35.1	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.145</i>	<i>1.382</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-018-096FF-SBX-SET-07.938	18	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	29.09	34.9	20.64	20.64
		<i>0.374</i>	<i>0.313</i>				<i>1.145</i>	<i>1.374</i>	<i>0.813</i>	<i>0.813</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-018-096FF-SBX-SNH-07.938	18	9.5	7.938	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	29.09	34.9	13.89	
		<i>0.374</i>	<i>0.313</i>				<i>1.145</i>	<i>1.374</i>	<i>0.547</i>	
# P-XL-018-096FF-PFR-AIS-07.938	18	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096P-ALA-SET-07.938	18	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	29.09		22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.145</i>		<i>0.875</i>	<i>0.875</i>
# P-XL-018-096FF-ALA-SET-07.938	18	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	29.09	34.9	20.64	20.64
		<i>0.374</i>	<i>0.313</i>				<i>1.145</i>	<i>1.374</i>	<i>0.813</i>	<i>0.813</i>
# P-XL-018-096SF-PFR-AIS-07.938	18	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096FF-ALA-SNH-07.938	18	9.5	7.938	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	29.09	34.9	14.29	No Hub
		<i>0.374</i>	<i>0.313</i>				<i>1.145</i>	<i>1.374</i>	<i>0.563</i>	
# P-XL-018-095FF-SBX-SNH-08.000	18	9.5	8.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	29.09	35.0	13.80	
		<i>0.374</i>	<i>0.315</i>				<i>1.145</i>	<i>1.378</i>	<i>0.543</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-018-095FF-ALA-SNH-08.000	18	9.5	8.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	29.09	35.0	14.20	
		<i>0.374</i>	<i>0.315</i>				<i>1.145</i>	<i>1.378</i>	<i>0.559</i>	
# P-XL-018-095SF-PFR-AIS-08.000	18	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2H (Single Flange)	29.09	35.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	
# P-XL-018-095FF-PFR-AIS-08.000	18	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_H (Double Flange)	29.09	35.0	20.60	19.00
		<i>0.374</i>	<i>0.315</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-018-095FF-ALA-SET-08.000	18	9.5	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	29.09	35.0	20.60	21.00
		<i>0.374</i>	<i>0.315</i>				<i>1.145</i>	<i>1.378</i>	<i>0.811</i>	<i>0.827</i>
# P-XL-018-095P-ALA-SET-08.000	18	9.5	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	29.09		22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.145</i>		<i>0.874</i>	<i>0.866</i>
# P-XL-018-095SF-ACE-NIL-08.000	18	9.5	8.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	29.09	35.0	25.40	15.90
		<i>0.374</i>	<i>0.315</i>				<i>1.145</i>	<i>1.378</i>	<i>1.000</i>	<i>0.626</i>
# P-XL-018-096P-ALA-SET-09.525	18	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	29.09		22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.145</i>		<i>0.875</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-018-096FF-ALA-SET-09.525	18	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	29.09	34.9	20.64	20.64
		<i>0.374</i>	<i>0.375</i>				<i>1.145</i>	<i>1.374</i>	<i>0.813</i>	<i>0.813</i>
# P-XL-018-096FF-PFR-AIS-09.525	18	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_H (Double Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096FF-SBX-SET-09.525	18	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	29.09	34.9	20.64	20.64
		<i>0.374</i>	<i>0.375</i>				<i>1.145</i>	<i>1.374</i>	<i>0.813</i>	<i>0.813</i>
# P-XL-018-096SF-PFR-AIS-09.525	18	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2H (Single Flange)	29.09	35.1	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>1.145</i>	<i>1.382</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-018-096SF-NFR-SLC-15.875	18	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	29.09	35.1	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.145</i>	<i>1.382</i>	<i>0.580</i>	
# P-XL-018-096FF-NFR-SLC-15.875	18	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	29.09	35.1	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.145</i>	<i>1.382</i>	<i>0.609</i>	
# P-XL-019-095SF-PFR-FLC-06.000	19	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub -tm-	SF_FL_HW (Single Flange)	30.71	37.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-019-095SF-PFR-ALS-06.000	19	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	30.71	37.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-019-095SF-PFR-NIL-06.000	19	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	30.71	37.0	20.60	19.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	
# P-XL-019-095SF-PFR-AIS-06.000	19	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	30.71	37.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	
# P-XL-019-095FF-PFR-NIL-06.000	19	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	30.71	37.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-019-095FF-PFR-ALS-06.000	19	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	30.71	37.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
P-XL-019-095FF-PFR-AIS-06.000	19	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	30.71	37.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-019-095FF-PFR-FLC-06.000	19	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	30.71	37.0	20.60	19.00
		<i>0.374</i>	<i>0.236</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-019-096FF-PFR-ALS-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-096FF-PFR-AIS-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-096FF-PFR-NIL-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-096FF-PFR-FLC-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
P-XL-019-096FF-ALA-SET-06.350	19	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.71	36.5	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.437</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-019-096FF-PFR-SET-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-019-096P-ALA-SET-06.350	19	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	30.71		22.23	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>		<i>0.875</i>	<i>0.875</i>
# P-XL-019-096SF-PFR-AIS-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-096SF-PFR-ALS-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-096SF-PFR-NIL-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	30.71	36.6	20.60	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.811</i>	<i>0.750</i>
# P-XL-019-096SF-PFR-FLC-06.350	19	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-096SF-NFR-SET-06.363	19	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	30.71	36.6	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.209</i>	<i>1.441</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-019-096FF-NFR-SET-06.363	19	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	30.71	36.6	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.209</i>	<i>1.441</i>	<i>0.922</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-019-096FF-PFR-AIS-07.938	19	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-096SF-PFR-AIS-07.938	19	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-095FF-PFR-AIS-08.000	19	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	30.71	37.0	20.60	19.00
		<i>0.374</i>	<i>0.315</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	<i>0.748</i>
# P-XL-019-095SF-PFR-AIS-08.000	19	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	30.71	37.0	20.60	19.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.209</i>	<i>1.457</i>	<i>0.811</i>	
# P-XL-019-096SF-PFR-AIS-09.525	19	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-019-096FF-PFR-AIS-09.525	19	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.71	36.6	20.64	19.05
		<i>0.374</i>	<i>0.375</i>				<i>1.209</i>	<i>1.441</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-019-096FF-NFR-SLC-15.875	19	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	30.71	36.3	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.209</i>	<i>1.429</i>	<i>0.609</i>	
# P-XL-019-096SF-NFR-SLC-15.875	19	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	30.71	36.3	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.209</i>	<i>1.429</i>	<i>0.580</i>	
P-XL-020-060FF-ALA-SET-08.000	20	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.33	38.0	19.10	24.00
		<i>0.236</i>	<i>0.315</i>				<i>1.273</i>	<i>1.496</i>	<i>0.752</i>	<i>0.945</i>
# P-XL-020-063FF-ALA-SET-06.350	20	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.33	38.1	19.05	23.81
		<i>0.252</i>	<i>0.250</i>				<i>1.273</i>	<i>1.500</i>	<i>0.750</i>	<i>0.937</i>
# P-XL-020-063FF-ALA-SET-07.938	20	6.4	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.33	38.1	19.05	23.81
		<i>0.252</i>	<i>0.313</i>				<i>1.273</i>	<i>1.500</i>	<i>0.750</i>	<i>0.937</i>
# P-XL-020-095FF-PFR-NIL-06.000	20	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	32.33	38.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-020-095FF-PFR-ALS-06.000	20	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	32.33	38.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-020-095SF-PFR-FLC-06.000	20	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	32.33	38.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-020-095SF-PFR-ALS-06.000	20	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	32.33	38.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-020-095SF-PFR-AIS-06.000	20	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	32.33	38.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	
# P-XL-020-095FF-PFR-FLC-06.000	20	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	32.33	38.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-020-095SF-PFR-NIL-06.000	20	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	32.33	38.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	
# P-XL-020-095FF-PFR-AIS-06.000	20	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	32.33	38.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-020-096SF-PFR-FLC-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096FF-SBX-SET-06.350	20	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	32.33	38.1	22.23	23.81
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.500</i>	<i>0.875</i>	<i>0.937</i>
# P-XL-020-096FF-PFR-SET-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	32.33	38.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-020-096FF-PFR-NIL-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096FF-PFR-FLC-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096SF-ACE-NIL-06.350	20	9.5	6.350	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	32.33	38.1	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.500</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-020-096FF-PFR-ALS-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-020-096FF-PFR-AIS-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096SF-PFR-ALS-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096FF-ALU-SET-06.350	20	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	32.33	38.1	23.02	23.81
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.500</i>	<i>0.906</i>	<i>0.937</i>
# P-XL-020-096P-ALA-SET-06.350	20	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	32.33		23.81	23.81
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>		<i>0.937</i>	<i>0.937</i>
# P-XL-020-096SF-PFR-AIS-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096FF-SBX-SNH-06.350	20	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	32.33	38.1	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.500</i>	<i>0.547</i>	
# P-XL-020-096SF-PFR-NIL-06.350	20	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	32.33	38.4	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.512</i>	<i>0.811</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-020-096FF-ACE-NIL-06.350	20	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	32.33	38.1	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.500</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-020-096FF-ALA-SET-06.350	20	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.33	38.1	22.23	23.81
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.500</i>	<i>0.875</i>	<i>0.937</i>
# P-XL-020-096FF-ALA-SNH-06.350	20	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	32.33	38.1	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>1.273</i>	<i>1.500</i>	<i>0.563</i>	
# P-XL-020-096FF-NFR-SET-06.363	20	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	32.33	38.1	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.273</i>	<i>1.500</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-020-096SF-NFR-SET-06.363	20	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	32.33	38.1	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.273</i>	<i>1.500</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-020-096SF-PFR-AIS-07.938	20	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096FF-SBX-SET-07.938	20	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	32.33	38.1	22.23	23.81
		<i>0.374</i>	<i>0.313</i>				<i>1.273</i>	<i>1.500</i>	<i>0.875</i>	<i>0.937</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-020-096FF-SBX-SNH-07.938	20	9.5	7.938	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	32.33	38.1	13.89	
		<i>0.374</i>	<i>0.313</i>				<i>1.273</i>	<i>1.500</i>	<i>0.547</i>	
# P-XL-020-096FF-PFR-AIS-07.938	20	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096P-ALA-SET-07.938	20	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	32.33		23.81	23.81
		<i>0.374</i>	<i>0.313</i>				<i>1.273</i>		<i>0.937</i>	<i>0.937</i>
# P-XL-020-096FF-ALA-SET-07.938	20	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.33	38.1	22.23	23.81
		<i>0.374</i>	<i>0.313</i>				<i>1.273</i>	<i>1.500</i>	<i>0.875</i>	<i>0.937</i>
# P-XL-020-096FF-ALA-SNH-07.938	20	9.5	7.938	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	32.33	38.1	14.29	No Hub
		<i>0.374</i>	<i>0.313</i>				<i>1.273</i>	<i>1.500</i>	<i>0.563</i>	
# P-XL-020-095FF-ALA-SNH-08.000	20	9.5	8.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	32.33	38.0	14.20	
		<i>0.374</i>	<i>0.315</i>				<i>1.273</i>	<i>1.496</i>	<i>0.559</i>	
# P-XL-020-095SF-PFR-AIS-08.000	20	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	32.33	38.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-020-095FF-ALA-SET-08.000	20	9.5	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.33	38.0	22.20	24.00
		<i>0.374</i>	<i>0.315</i>				<i>1.273</i>	<i>1.496</i>	<i>0.874</i>	<i>0.945</i>
# P-XL-020-095FF-PFR-AIS-08.000	20	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	32.33	38.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.273</i>	<i>1.496</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-020-095FF-SBX-SNH-08.000	20	9.5	8.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	32.33	38.0	13.80	
		<i>0.374</i>	<i>0.315</i>				<i>1.273</i>	<i>1.496</i>	<i>0.543</i>	
# P-XL-020-095SF-ACE-NIL-08.000	20	9.5	8.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	32.33	38.0	25.40	15.90
		<i>0.374</i>	<i>0.315</i>				<i>1.273</i>	<i>1.496</i>	<i>1.000</i>	<i>0.626</i>
# P-XL-020-095P-ALA-SET-08.000	20	9.5	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	32.33		23.80	24.00
		<i>0.374</i>	<i>0.315</i>				<i>1.273</i>		<i>0.937</i>	<i>0.945</i>
# P-XL-020-096SF-PFR-AIS-09.525	20	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096FF-ALA-SNH-09.525	20	9.5	9.525	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	32.33	38.1	14.29	No Hub
		<i>0.374</i>	<i>0.375</i>				<i>1.273</i>	<i>1.500</i>	<i>0.563</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-020-096FF-SBX-SNH-09.525	20	9.5	9.525	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	32.33	38.1	13.89	
		<i>0.374</i>	<i>0.375</i>				<i>1.273</i>	<i>1.500</i>	<i>0.547</i>	
# P-XL-020-096P-ALA-SET-09.525	20	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	32.33		23.81	23.81
		<i>0.374</i>	<i>0.375</i>				<i>1.273</i>		<i>0.937</i>	<i>0.937</i>
# P-XL-020-096FF-ALA-SET-09.525	20	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.33	38.1	22.23	23.81
		<i>0.374</i>	<i>0.375</i>				<i>1.273</i>	<i>1.500</i>	<i>0.875</i>	<i>0.937</i>
# P-XL-020-096FF-SBX-SET-09.525	20	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	32.33	38.1	22.23	23.81
		<i>0.374</i>	<i>0.375</i>				<i>1.273</i>	<i>1.500</i>	<i>0.875</i>	<i>0.937</i>
# P-XL-020-096FF-PFR-AIS-09.525	20	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	32.33	38.4	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.273</i>	<i>1.512</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-020-096FF-ALA-SET-12.700	20	9.5	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	32.33	38.1	22.23	23.81
		<i>0.374</i>	<i>0.500</i>				<i>1.273</i>	<i>1.500</i>	<i>0.875</i>	<i>0.937</i>
P-XL-020-096FF-SBX-SET-12.700	20	9.5	12.700	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	32.33	38.1	22.23	23.81
		<i>0.374</i>	<i>0.500</i>				<i>1.273</i>	<i>1.500</i>	<i>0.875</i>	<i>0.937</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-020-096SF-NFR-SLC-15.875	20	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	32.33	38.1	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.273</i>	<i>1.500</i>	<i>0.580</i>	
# P-XL-020-096FF-NFR-SLC-15.875	20	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	32.33	38.1	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.273</i>	<i>1.500</i>	<i>0.609</i>	
# P-XL-021-063FF-ALA-SET-06.350	21	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	33.94	39.7	19.05	25.40
		<i>0.252</i>	<i>0.250</i>				<i>1.336</i>	<i>1.563</i>	<i>0.750</i>	<i>1.000</i>
# P-XL-021-063FF-ALA-SET-07.938	21	6.4	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	33.94	39.7	19.05	25.40
		<i>0.252</i>	<i>0.313</i>				<i>1.336</i>	<i>1.563</i>	<i>0.750</i>	<i>1.000</i>
# P-XL-021-095SF-PFR-ALS-06.000	21	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_M (Single Flange)	33.94	40.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-021-095SF-PFR-AIS-06.000	21	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	33.94	40.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-021-095SF-PFR-FLC-06.000	21	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	33.94	40.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-021-095SF-PFR-NIL-06.000	21	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	33.94	40.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	
# P-XL-021-095FF-PFR-FLC-06.000	21	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	33.94	40.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-021-095FF-PFR-ALS-06.000	21	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_M (Double Flange)	33.94	40.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
P-XL-021-095FF-PFR-AIS-06.000	21	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	33.94	40.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-021-095FF-PFR-NIL-06.000	21	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	33.94	40.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-021-096FF-ALA-SNH-06.350	21	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	33.94	39.7	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.563</i>	<i>0.563</i>	
# P-XL-021-096FF-SBX-SET-06.350	21	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	33.94	39.7	22.23	25.40
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.563</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-021-096FF-PFR-SET-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	33.94	39.9	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-021-096FF-PFR-NIL-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096FF-PFR-FLC-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096FF-PFR-ALS-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_M (Double Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096SF-ACE-NIL-06.350	21	9.5	6.350	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	33.94	39.7	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.563</i>	<i>1.000</i>	<i>0.625</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-021-096FF-PFR-AIS-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096SF-PFR-FLC-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096SF-PFR-AIS-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096SF-PFR-ALS-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_M (Single Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096FF-ALA-SET-06.350	21	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	33.94	39.7	22.23	25.40
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.563</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-021-096FF-ACE-NIL-06.350	21	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	33.94	39.7	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.563</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-021-096FF-SBX-SNH-06.350	21	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	33.94	39.7	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.563</i>	<i>0.547</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-021-096P-ALA-SET-06.350	21	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	33.94		23.81	25.40
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>		<i>0.937</i>	<i>1.000</i>
# P-XL-021-096SF-PFR-NIL-06.350	21	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	33.94	39.9	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.571</i>	<i>0.811</i>	<i>0.875</i>
# P-XL-021-096FF-ALU-SET-06.350	21	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	33.94	39.7	23.02	23.81
		<i>0.374</i>	<i>0.250</i>				<i>1.336</i>	<i>1.563</i>	<i>0.906</i>	<i>0.937</i>
# P-XL-021-096FF-NFR-SET-06.363	21	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	33.94	39.9	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.336</i>	<i>1.571</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-021-096SF-NFR-SET-06.363	21	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	33.94	39.9	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.336</i>	<i>1.571</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-021-096SF-PFR-AIS-07.938	21	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096FF-SBX-SNH-07.938	21	9.5	7.938	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	33.94	39.7	13.89	
		<i>0.374</i>	<i>0.313</i>				<i>1.336</i>	<i>1.563</i>	<i>0.547</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-021-096FF-SBX-SET-07.938	21	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	33.94	39.7	22.23	25.40
		<i>0.374</i>	<i>0.313</i>				<i>1.336</i>	<i>1.563</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-021-096P-ALA-SET-07.938	21	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	33.94		23.81	25.40
		<i>0.374</i>	<i>0.313</i>				<i>1.336</i>		<i>0.937</i>	<i>1.000</i>
# P-XL-021-096FF-PFR-AIS-07.938	21	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096FF-ALA-SET-07.938	21	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	33.94	39.7	22.23	25.40
		<i>0.374</i>	<i>0.313</i>				<i>1.336</i>	<i>1.563</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-021-096FF-ALA-SNH-07.938	21	9.5	7.938	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	33.94	39.7	14.29	No Hub
		<i>0.374</i>	<i>0.313</i>				<i>1.336</i>	<i>1.563</i>	<i>0.563</i>	
# P-XL-021-095SF-PFR-AIS-08.000	21	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	33.94	40.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	
# P-XL-021-095SF-ACE-NIL-08.000	21	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	33.94	40.0	23.80	15.90
		<i>0.374</i>	<i>0.315</i>				<i>1.336</i>	<i>1.575</i>	<i>0.937</i>	<i>0.626</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-021-095FF-PFR-AIS-08.000	21	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	33.94	40.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.336</i>	<i>1.575</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-021-096FF-ALA-SET-09.525	21	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	33.94	39.7	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>1.336</i>	<i>1.563</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-021-096SF-PFR-AIS-09.525	21	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096FF-PFR-AIS-09.525	21	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	33.94	39.9	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.336</i>	<i>1.571</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-021-096FF-NFR-SLC-15.875	21	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	33.94	39.9	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.336</i>	<i>1.571</i>	<i>0.609</i>	
# P-XL-021-096SF-NFR-SLC-15.875	21	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	33.94	39.9	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.336</i>	<i>1.571</i>	<i>0.580</i>	
# P-XL-022-060FF-ALA-SET-08.000	22	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.56	41.0	19.10	25.00
		<i>0.236</i>	<i>0.315</i>				<i>1.400</i>	<i>1.614</i>	<i>0.752</i>	<i>0.984</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-022-063FF-ALA-SET-06.350	22	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.56	41.3	19.05	25.40
		<i>0.252</i>	<i>0.250</i>				<i>1.400</i>	<i>1.626</i>	<i>0.750</i>	<i>1.000</i>
# P-XL-022-063FF-ALA-SET-09.525	22	6.4	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.56	41.3	19.05	25.40
		<i>0.252</i>	<i>0.375</i>				<i>1.400</i>	<i>1.626</i>	<i>0.750</i>	<i>1.000</i>
# P-XL-022-095FF-PFR-NIL-06.000	22	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	35.56	41.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-022-095SF-PFR-AIS-06.000	22	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	35.56	41.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	
# P-XL-022-095FF-PFR-FLC-06.000	22	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	35.56	41.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-022-095FF-PFR-ALS-06.000	22	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	35.56	41.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-XL-022-095FF-PFR-AIS-06.000	22	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	35.56	41.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-022-095SF-PFR-FLC-06.000	22	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	35.56	41.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-022-095SF-PFR-NIL-06.000	22	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	35.56	41.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	
# P-XL-022-095SF-PFR-ALS-06.000	22	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	35.56	41.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-022-096FF-ALA-SNH-06.350	22	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	35.56	41.3	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.626</i>	<i>0.563</i>	
# P-XL-022-096FF-ALU-SET-06.350	22	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	35.56	41.3	23.02	25.40
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.626</i>	<i>0.906</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-022-096FF-PFR-AIS-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096FF-SBX-SET-06.350	22	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	35.56	41.3	22.23	25.40
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.626</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-022-096P-ALA-SET-06.350	22	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	35.56		23.81	26.99
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>		<i>0.937</i>	<i>1.063</i>
# P-XL-022-096FF-PFR-FLC-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096FF-PFR-NIL-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096FF-PFR-ALS-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096FF-ALA-SET-06.350	22	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.56	41.3	22.23	25.40
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.626</i>	<i>0.875</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-022-096FF-ACE-NIL-06.350	22	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	35.56	41.3	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.626</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-022-096SF-ACE-NIL-06.350	22	9.5	6.350	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	35.56	41.3	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.626</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-022-096FF-PFR-SET-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	35.56	41.4	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-022-096SF-PFR-AIS-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096FF-SBX-SNH-06.350	22	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	35.56	41.3	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.626</i>	<i>0.547</i>	
# P-XL-022-096SF-PFR-ALS-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096SF-PFR-FLC-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-022-096SF-PFR-NIL-06.350	22	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	35.56	41.4	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.400</i>	<i>1.630</i>	<i>0.811</i>	<i>0.875</i>
# P-XL-022-096FF-NFR-SET-06.363	22	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	35.56	41.4	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.400</i>	<i>1.630</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-022-096SF-NFR-SET-06.363	22	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	35.56	41.4	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.400</i>	<i>1.630</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-022-096FF-SBX-SNH-07.938	22	9.5	7.938	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	35.56	41.3	13.89	
		<i>0.374</i>	<i>0.313</i>				<i>1.400</i>	<i>1.626</i>	<i>0.547</i>	
# P-XL-022-096P-ALA-SET-07.938	22	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	35.56		23.81	26.99
		<i>0.374</i>	<i>0.313</i>				<i>1.400</i>		<i>0.937</i>	<i>1.063</i>
# P-XL-022-096FF-SBX-SET-07.938	22	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	35.56	41.3	22.23	25.40
		<i>0.374</i>	<i>0.313</i>				<i>1.400</i>	<i>1.626</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-022-096SF-PFR-AIS-07.938	22	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-022-096FF-PFR-AIS-07.938	22	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096FF-ALA-SNH-07.938	22	9.5	7.938	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	35.56	41.3	14.29	No Hub
		<i>0.374</i>	<i>0.313</i>				<i>1.400</i>	<i>1.626</i>	<i>0.563</i>	
# P-XL-022-096FF-ALA-SET-07.938	22	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.56	41.3	22.23	25.40
		<i>0.374</i>	<i>0.313</i>				<i>1.400</i>	<i>1.626</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-022-095P-ALA-SET-08.000	22	9.5	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	35.56		23.80	27.00
		<i>0.374</i>	<i>0.315</i>				<i>1.400</i>		<i>0.937</i>	<i>1.063</i>
# P-XL-022-095FF-ALA-SET-08.000	22	9.5	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.56	41.0	22.20	25.00
		<i>0.374</i>	<i>0.315</i>				<i>1.400</i>	<i>1.614</i>	<i>0.874</i>	<i>0.984</i>
# P-XL-022-095FF-ALA-SNH-08.000	22	9.5	8.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	35.56	41.0	14.20	
		<i>0.374</i>	<i>0.315</i>				<i>1.400</i>	<i>1.614</i>	<i>0.559</i>	
# P-XL-022-095FF-PFR-AIS-08.000	22	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	35.56	41.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-022-095FF-SBX-SNH-08.000	22	9.5	8.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	35.56	41.0	13.80	
		<i>0.374</i>	<i>0.315</i>				<i>1.400</i>	<i>1.614</i>	<i>0.543</i>	
# P-XL-022-095SF-ACE-NIL-08.000	22	9.5	8.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	35.56	41.0	25.40	15.90
		<i>0.374</i>	<i>0.315</i>				<i>1.400</i>	<i>1.614</i>	<i>1.000</i>	<i>0.626</i>
# P-XL-022-095SF-PFR-AIS-08.000	22	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	35.56	41.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.400</i>	<i>1.614</i>	<i>0.811</i>	
# P-XL-022-096P-ALA-SET-09.525	22	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	35.56		23.81	26.99
		<i>0.374</i>	<i>0.375</i>				<i>1.400</i>		<i>0.937</i>	<i>1.063</i>
# P-XL-022-096SF-PFR-AIS-09.525	22	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096FF-ALA-SET-09.525	22	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	35.56	41.3	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>1.400</i>	<i>1.626</i>	<i>0.875</i>	<i>1.000</i>
# P-XL-022-096FF-SBX-SET-09.525	22	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	35.56	41.3	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>1.400</i>	<i>1.626</i>	<i>0.875</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-022-096FF-PFR-AIS-09.525	22	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	35.56	41.4	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.400</i>	<i>1.630</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-022-096FF-NFR-SLC-15.875	22	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	35.56	41.4	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.400</i>	<i>1.630</i>	<i>0.609</i>	
# P-XL-022-096SF-NFR-SLC-15.875	22	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	35.56	41.4	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.400</i>	<i>1.630</i>	<i>0.580</i>	
# P-XL-023-095SF-PFR-ALS-06.000	23	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	37.18	43.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-023-095FF-PFR-NIL-06.000	23	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	37.18	43.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-023-095SF-PFR-FLC-06.000	23	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub -tm-	SF_FL_HW (Single Flange)	37.18	43.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-023-095SF-PFR-AIS-06.000	23	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	37.18	43.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	
# P-XL-023-095FF-PFR-ALS-06.000	23	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	37.18	43.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-023-095FF-PFR-AIS-06.000	23	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	37.18	43.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-023-095SF-PFR-NIL-06.000	23	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	37.18	43.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	
# P-XL-023-095FF-PFR-FLC-06.000	23	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	37.18	43.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-023-096P-ALA-SET-06.350	23	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	37.18		23.81	28.58
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>		<i>0.937</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-023-096SF-PFR-NIL-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	37.18	42.9	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.811</i>	<i>0.875</i>
# P-XL-023-096SF-PFR-FLC-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-096SF-PFR-ALS-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-096SF-PFR-AIS-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-096FF-PFR-SET-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	37.18	42.9	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-023-096FF-PFR-NIL-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-023-096FF-PFR-ALS-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-096FF-PFR-AIS-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-096FF-ALA-SET-06.350	23	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	37.18	42.9	22.23	26.99
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.875</i>	<i>1.063</i>
# P-XL-023-096FF-PFR-FLC-06.350	23	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-096SF-PFR-AIS-07.938	23	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-096FF-PFR-AIS-07.938	23	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-095FF-PFR-AIS-08.000	23	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	37.18	43.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-023-095SF-PFR-AIS-08.000	23	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	37.18	43.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.464</i>	<i>1.693</i>	<i>0.811</i>	
# P-XL-023-096SF-PFR-AIS-09.525	23	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-023-096FF-PFR-AIS-09.525	23	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	37.18	42.9	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.464</i>	<i>1.689</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-060FF-ALA-SET-08.000	24	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.0	19.80	27.00
		<i>0.236</i>	<i>0.315</i>				<i>1.527</i>	<i>1.732</i>	<i>0.780</i>	<i>1.063</i>
# P-XL-024-063FF-ALA-SET-06.350	24	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.5	19.84	26.99
		<i>0.252</i>	<i>0.250</i>				<i>1.527</i>	<i>1.752</i>	<i>0.781</i>	<i>1.063</i>
# P-XL-024-063FF-ALA-SET-07.938	24	6.4	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.5	19.84	26.99
		<i>0.252</i>	<i>0.313</i>				<i>1.527</i>	<i>1.752</i>	<i>0.781</i>	<i>1.063</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-XL-024-063FF-ALA-SET-09.525	24	6.4	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.5	19.84	26.99
		<i>0.252</i>	<i>0.375</i>				<i>1.527</i>	<i>1.752</i>	<i>0.781</i>	<i>1.063</i>
# P-XL-024-095FF-PFR-NIL-06.000	24	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	38.79	45.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-024-095SF-PFR-ALS-06.000	24	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	38.79	45.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-024-095SF-PFR-FLC-06.000	24	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	38.79	45.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-024-095SF-PFR-NIL-06.000	24	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	38.79	45.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	
# P-XL-024-095SF-PFR-AIS-06.000	24	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	38.79	45.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-024-095FF-PFR-ALS-06.000	24	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	38.79	45.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-024-095FF-PFR-AIS-06.000	24	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	38.79	45.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-024-095FF-PFR-FLC-06.000	24	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	38.79	45.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-024-096FF-PFR-FLC-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-096SF-PFR-NIL-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	38.79	44.7	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.811</i>	<i>0.875</i>
# P-XL-024-096SF-PFR-FLC-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-096SF-PFR-ALS-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-024-096SF-PFR-AIS-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-096P-ALA-SET-06.350	24	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.79		23.81	30.16
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>		<i>0.937</i>	<i>1.187</i>
# P-XL-024-096FF-SBX-SNH-06.350	24	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	38.79	44.5	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.752</i>	<i>0.547</i>	
# P-XL-024-096FF-SBX-SET-06.350	24	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096FF-PFR-NIL-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-096FF-PFR-ALS-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-096FF-PFR-AIS-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-024-096FF-ALU-SET-06.350	24	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096FF-ALA-SNH-06.350	24	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	38.79	44.5	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.752</i>	<i>0.563</i>	
# P-XL-024-096FF-ALA-SET-06.350	24	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096FF-PFR-SET-06.350	24	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	38.79	44.7	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-24-096FF-ACE-NIL-06.350	24	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	38.79	44.5	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.527</i>	<i>1.752</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-024-096FF-NFR-SET-06.363	24	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	38.79	44.7	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.527</i>	<i>1.760</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-024-096SF-NFR-SET-06.363	24	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	38.79	44.7	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.527</i>	<i>1.760</i>	<i>0.891</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-024-096SF-PFR-AIS-07.938	24	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-096FF-ALA-SNH-07.938	24	9.5	7.938	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	38.79	44.5	14.29	No Hub
		<i>0.374</i>	<i>0.313</i>				<i>1.527</i>	<i>1.752</i>	<i>0.563</i>	
# P-XL-024-096P-ALA-SET-07.938	24	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.79		23.81	30.16
		<i>0.374</i>	<i>0.313</i>				<i>1.527</i>		<i>0.937</i>	<i>1.187</i>
# P-XL-024-096SF-ACE-NIL-07.938	24	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	38.79	44.5	25.40	15.88
		<i>0.374</i>	<i>0.313</i>				<i>1.527</i>	<i>1.752</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-024-096FF-SBX-SET-07.938	24	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.313</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096FF-ALA-SET-07.938	24	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.313</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096FF-PFR-AIS-07.938	24	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-024-096FF-SBX-SNH-07.940	24	9.5	7.940	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	38.79	44.5	13.89	
		<i>0.374</i>	<i>0.313</i>				<i>1.527</i>	<i>1.752</i>	<i>0.547</i>	
# P-XL-024-095SF-ACE-NIL-08.000	24	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	38.79	44.0	23.80	15.90
		<i>0.374</i>	<i>0.315</i>				<i>1.527</i>	<i>1.732</i>	<i>0.937</i>	<i>0.626</i>
# P-XL-024-095P-ALA-SET-08.000	24	9.5	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.79		23.80	3.00
		<i>0.374</i>	<i>0.315</i>				<i>1.527</i>		<i>0.937</i>	<i>0.118</i>
# P-XL-024-095FF-SBX-SNH-08.000	24	9.5	8.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	38.79	44.0	13.80	
		<i>0.374</i>	<i>0.315</i>				<i>1.527</i>	<i>1.732</i>	<i>0.543</i>	
# P-XL-024-095SF-PFR-AIS-08.000	24	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	38.79	45.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	
# P-XL-024-095FF-ALA-SNH-08.000	24	9.5	8.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	38.79	44.0	14.20	
		<i>0.374</i>	<i>0.315</i>				<i>1.527</i>	<i>1.732</i>	<i>0.559</i>	
# P-XL-024-095FF-PFR-AIS-08.000	24	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	38.79	45.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.527</i>	<i>1.772</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-024-095FF-ALA-SET-08.000	24	9.5	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.0	22.20	27.00
		<i>0.374</i>	<i>0.315</i>				<i>1.527</i>	<i>1.732</i>	<i>0.874</i>	<i>1.063</i>
# P-XL-024-096FF-ALA-SET-09.525	24	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.375</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096FF-ALA-SNH-09.525	24	9.5	9.525	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	38.79	44.5	14.29	No Hub
		<i>0.374</i>	<i>0.375</i>				<i>1.527</i>	<i>1.752</i>	<i>0.563</i>	
# P-XL-024-096FF-SBX-SNH-09.525	24	9.5	9.525	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	38.79	44.5	13.89	
		<i>0.374</i>	<i>0.375</i>				<i>1.527</i>	<i>1.752</i>	<i>0.547</i>	
# P-XL-024-096SF-PFR-AIS-09.525	24	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-096FF-SBX-SET-09.525	24	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.375</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096P-ALA-SET-09.525	24	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	38.79		23.81	30.16
		<i>0.374</i>	<i>0.375</i>				<i>1.527</i>		<i>0.937</i>	<i>1.187</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-024-096FF-PFR-AIS-09.525	24	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	38.79	44.7	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.527</i>	<i>1.760</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-024-096FF-ALA-SET-12.700	24	9.5	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.500</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096FF-SBX-SET-12.700	24	9.5	12.700	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	38.79	44.5	23.02	26.99
		<i>0.374</i>	<i>0.500</i>				<i>1.527</i>	<i>1.752</i>	<i>0.906</i>	<i>1.063</i>
# P-XL-024-096SF-NFR-SLC-15.875	24	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	38.79	44.7	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.527</i>	<i>1.760</i>	<i>0.580</i>	
# P-XL-024-096FF-NFR-SLC-15.875	24	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	38.79	44.7	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.527</i>	<i>1.760</i>	<i>0.609</i>	
# P-XL-025-095FF-PFR-FLC-06.000	25	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub -tm-	FF_FL_HW (Double Flange)	40.41	46.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-025-095SF-PFR-ALS-06.000	25	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	40.41	46.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-025-095SF-PFR-NIL-06.000	25	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	40.41	46.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	
# P-XL-025-095SF-PFR-FLC-06.000	25	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	40.41	46.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-025-095FF-PFR-NIL-06.000	25	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	40.41	46.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-025-095FF-PFR-AIS-06.000	25	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	40.41	46.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-025-095FF-PFR-ALS-06.000	25	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	40.41	46.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-025-095SF-PFR-AIS-06.000	25	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	40.41	46.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-025-096FF-SBX-SET-06.350	25	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	40.41	46.0	23.02	27.78
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.811</i>	<i>0.906</i>	<i>1.094</i>
# P-XL-025-096FF-PFR-SET-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	40.41	46.2	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-025-096FF-PFR-NIL-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096FF-PFR-FLC-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096FF-PFR-ALS-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096SF-PFR-AIS-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096P-ALA-SET-06.350	25	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	40.41		23.81	31.75
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>		<i>0.937</i>	<i>1.250</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-XL-025-096FF-PFR-AIS-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096SF-PFR-ALS-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096FF-ALA-SET-06.350	25	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	40.41	46.0	23.02	27.78
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.811</i>	<i>0.906</i>	<i>1.094</i>
# P-XL-025-096SF-PFR-FLC-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096SF-PFR-NIL-06.350	25	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	40.41	46.2	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.591</i>	<i>1.819</i>	<i>0.811</i>	<i>0.875</i>
# P-XL-025-096SF-NFR-SET-06.363	25	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	40.41	45.7	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.591</i>	<i>1.799</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-025-096FF-NFR-SET-06.363	25	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	40.41	45.7	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.591</i>	<i>1.799</i>	<i>0.922</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-025-096SF-PFR-AIS-07.938	25	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096FF-PFR-AIS-07.938	25	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-095FF-PFR-AIS-08.000	25	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	40.41	46.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-025-095SF-PFR-AIS-08.000	25	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	40.41	46.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.591</i>	<i>1.811</i>	<i>0.811</i>	
# P-XL-025-096FF-PFR-AIS-09.525	25	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096FF-ALA-SET-09.525	25	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	40.41	46.0	23.02	27.78
		<i>0.374</i>	<i>0.375</i>				<i>1.591</i>	<i>1.811</i>	<i>0.906</i>	<i>1.094</i>
# P-XL-025-096P-ALA-SET-09.525	25	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	40.41		23.81	31.75
		<i>0.374</i>	<i>0.375</i>				<i>1.591</i>		<i>0.937</i>	<i>1.250</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-025-096SF-PFR-AIS-09.525	25	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	40.41	46.2	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.591</i>	<i>1.819</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-025-096FF-SBX-SET-09.525	25	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	40.41	46.0	23.02	27.78
		<i>0.374</i>	<i>0.375</i>				<i>1.591</i>	<i>1.811</i>	<i>0.906</i>	<i>1.094</i>
# P-XL-025-096SF-NFR-SLC-15.875	25	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	40.41	45.7	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.591</i>	<i>1.799</i>	<i>0.580</i>	
# P-XL-025-096FF-NFR-SLC-15.875	25	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	40.41	45.7	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.591</i>	<i>1.799</i>	<i>0.609</i>	
# P-XL-026-063FF-ALA-SET-06.350	26	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.03	47.6	19.84	30.16
		<i>0.252</i>	<i>0.250</i>				<i>1.655</i>	<i>1.874</i>	<i>0.781</i>	<i>1.187</i>
# P-XL-026-063FF-ALA-SET-09.525	26	6.4	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.03	47.6	19.84	30.16
		<i>0.252</i>	<i>0.375</i>				<i>1.655</i>	<i>1.874</i>	<i>0.781</i>	<i>1.187</i>
# P-XL-026-095FF-PFR-ALS-06.000	26	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	42.03	48.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-026-095SF-PFR-FLC-06.000	26	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	42.03	48.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-026-095SF-PFR-ALS-06.000	26	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	42.03	48.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-026-095SF-PFR-AIS-06.000	26	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	42.03	48.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	
# P-XL-026-095SF-PFR-NIL-06.000	26	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	42.03	48.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	
# P-XL-026-095FF-PFR-FLC-06.000	26	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	42.03	48.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-026-095FF-PFR-AIS-06.000	26	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	42.03	48.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-026-095FF-PFR-NIL-06.000	26	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	42.03	48.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-026-096SF-PFR-ALS-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-096SF-PFR-FLC-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-096SF-PFR-AIS-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-096FF-ALA-SET-06.350	26	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.03	47.6	23.02	30.16
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.874</i>	<i>0.906</i>	<i>1.187</i>
# P-XL-026-096FF-PFR-FLC-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-096SF-PFR-NIL-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	42.03	48.0	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-026-096FF-PFR-AIS-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-096FF-PFR-SET-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	42.03	48.0	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-026-096FF-PFR-NIL-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-096FF-PFR-ALS-06.350	26	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-096SF-NFR-SET-06.363	26	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	42.03	47.5	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.655</i>	<i>1.870</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-026-096FF-NFR-SET-06.363	26	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	42.03	47.5	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.655</i>	<i>1.870</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-026-096FF-PFR-AIS-07.938	26	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-026-096SF-PFR-AIS-07.938	26	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-095SF-PFR-AIS-08.000	26	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	42.03	48.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	
# P-XL-026-095FF-PFR-AIS-08.000	26	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	42.03	48.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.655</i>	<i>1.890</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-026-096FF-ALA-SET-09.525	26	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.03	47.6	23.02	30.16
		<i>0.374</i>	<i>0.375</i>				<i>1.655</i>	<i>1.874</i>	<i>0.906</i>	<i>1.187</i>
# P-XL-026-096SF-PFR-AIS-09.525	26	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-026-096FF-PFR-AIS-09.525	26	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	42.03	48.0	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.655</i>	<i>1.890</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-026-096FF-NFR-SLC-15.875	26	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	42.03	47.5	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.655</i>	<i>1.870</i>	<i>0.609</i>	
# P-XL-026-096SF-NFR-SLC-15.875	26	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	42.03	47.5	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.655</i>	<i>1.870</i>	<i>0.580</i>	
# P-XL-027-095FF-PFR-NIL-06.000	27	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	43.64	50.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-027-095SF-PFR-NIL-06.000	27	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	43.64	50.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	
# P-XL-027-095SF-PFR-FLC-06.000	27	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub -tm-	SF_FL_HW (Single Flange)	43.64	50.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-027-095SF-PFR-ALS-06.000	27	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	43.64	50.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-027-095SF-PFR-AIS-06.000	27	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	43.64	50.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	
P-XL-027-095FF-PFR-FLC-06.000	27	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	43.64	50.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-027-095FF-PFR-ALS-06.000	27	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	43.64	50.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-027-095FF-PFR-AIS-06.000	27	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	43.64	50.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-027-096FF-PFR-AIS-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096SF-PFR-FLC-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-027-096SF-PFR-ALS-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096SF-PFR-AIS-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096FF-PFR-ALS-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096FF-PFR-FLC-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096FF-PFR-NIL-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096FF-PFR-SET-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	43.64	49.5	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.750</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-027-096SF-PFR-NIL-06.350	27	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	43.64	49.5	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.718</i>	<i>1.949</i>	<i>0.811</i>	<i>0.875</i>
# P-XL-027-096SF-NFR-SET-06.363	27	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	43.64	49.3	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.718</i>	<i>1.941</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-027-096FF-NFR-SET-06.363	27	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	43.64	49.3	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.718</i>	<i>1.941</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-027-096SF-PFR-AIS-07.938	27	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096FF-PFR-AIS-07.938	27	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096P-ALA-SET-07.938	27	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	43.64		23.81	31.75
		<i>0.374</i>	<i>0.313</i>				<i>1.718</i>		<i>0.937</i>	<i>1.250</i>
# P-XL-027-095SF-PFR-AIS-08.000	27	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	43.64	50.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-027-095FF-PFR-AIS-08.000	27	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	43.64	50.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.718</i>	<i>1.969</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-027-096SF-PFR-AIS-09.525	27	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096FF-PFR-AIS-09.525	27	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	43.64	49.5	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.718</i>	<i>1.949</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-027-096SF-NFR-SLC-15.875	27	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	43.64	49.0	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.718</i>	<i>1.929</i>	<i>0.580</i>	
# P-XL-027-096FF-NFR-SLC-15.875	27	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	43.64	49.0	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.718</i>	<i>1.929</i>	<i>0.609</i>	
# P-XL-028-060FF-ALA-SET-08.000	28	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.26	51.0	19.80	
		<i>0.236</i>	<i>0.315</i>				<i>1.782</i>	<i>2.008</i>	<i>0.780</i>	
# P-XL-028-063FF-ALA-SET-06.350	28	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.26	50.8	19.84	30.16
		<i>0.252</i>	<i>0.250</i>				<i>1.782</i>	<i>2.000</i>	<i>0.781</i>	<i>1.187</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-028-063FF-ALA-SET-09.525	28	6.4	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.26	50.8	19.84	30.16
		<i>0.252</i>	<i>0.375</i>				<i>1.782</i>	<i>2.000</i>	<i>0.781</i>	<i>1.187</i>
# P-XL-028-095SF-PFR-FLC-06.000	28	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	45.26	51.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-028-095SF-PFR-NIL-06.000	28	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	45.26	51.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	
# P-XL-028-095FF-PFR-NIL-06.000	28	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	45.26	51.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-028-095SF-PFR-ALS-06.000	28	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	45.26	51.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-028-095SF-PFR-AIS-06.000	28	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	45.26	51.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-028-095FF-PFR-ALS-06.000	28	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	45.26	51.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-028-095FF-PFR-AIS-06.000	28	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	45.26	51.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-028-095FF-PFR-FLC-06.000	28	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	45.26	51.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-028-096FF-ACE-NIL-06.350	28	9.5	6.350	Acetal	No Locking Device	FF_NL_HW (Double Flange)	45.26	51.2	25.40	15.88
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.016</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-028-096FF-PFR-SET-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	45.26	51.3	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-028-096FF-PFR-NIL-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096FF-PFR-FLC-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-028-096FF-PFR-ALS-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096FF-SBX-SNH-06.350	28	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	45.26	50.8	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.000</i>	<i>0.547</i>	
# P-XL-028-096FF-PFR-AIS-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096FF-ALU-SET-06.350	28	9.5	6.350	Aluminium	Set Screw	FF_G_H (Double Flange)	45.26	50.8	23.02	30.16
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.000</i>	<i>0.906</i>	<i>1.187</i>
P-XL-028-096FF-SBX-SET-06.350	28	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	45.26	50.8	23.02	30.16
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.000</i>	<i>0.906</i>	<i>1.187</i>
# P-XL-028-096FF-ALA-SNH-06.350	28	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	45.26	50.8	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.000</i>	<i>0.563</i>	
# P-XL-028-096P-ALA-SET-06.350	28	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.26		23.81	31.75
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>		<i>0.937</i>	<i>1.250</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-028-096FF-ALA-SET-06.350	28	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.26	50.8	23.02	30.16
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.000</i>	<i>0.906</i>	<i>1.187</i>
# P-XL-028-096SF-PFR-AIS-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096SF-PFR-ALS-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096SF-PFR-FLC-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096SF-PFR-NIL-06.350	28	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	45.26	51.3	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.782</i>	<i>2.020</i>	<i>0.811</i>	<i>0.875</i>
# P-XL-028-096FF-NFR-SET-06.363	28	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	45.26	51.3	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.782</i>	<i>2.020</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-028-096SF-NFR-SET-06.363	28	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	45.26	51.3	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.782</i>	<i>2.020</i>	<i>0.891</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-028-096SF-ACE-NIL-07.938	28	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	45.26	50.8	25.40	15.88
		<i>0.374</i>	<i>0.313</i>				<i>1.782</i>	<i>2.000</i>	<i>1.000</i>	<i>0.625</i>
# P-XL-028-096FF-SBX-SET-07.938	28	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	45.26	50.8	23.02	30.16
		<i>0.374</i>	<i>0.313</i>				<i>1.782</i>	<i>2.000</i>	<i>0.906</i>	<i>1.187</i>
# P-XL-028-096SF-PFR-AIS-07.938	28	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096P-ALA-SET-07.938	28	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.26		23.81	31.75
		<i>0.374</i>	<i>0.313</i>				<i>1.782</i>		<i>0.937</i>	<i>1.250</i>
# P-XL-028-096FF-PFR-AIS-07.938	28	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096FF-ALA-SET-07.938	28	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.26	50.8	23.02	30.16
		<i>0.374</i>	<i>0.313</i>				<i>1.782</i>	<i>2.000</i>	<i>0.906</i>	<i>1.187</i>
# P-XL-028-095FF-ALA-SET-08.000	28	9.5	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.26	51.0	23.00	
		<i>0.374</i>	<i>0.315</i>				<i>1.782</i>	<i>2.008</i>	<i>0.906</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-028-095P-ALA-SET-08.000	28	9.5	8.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.26		23.80	32.00
		<i>0.374</i>	<i>0.315</i>				<i>1.782</i>		<i>0.937</i>	<i>1.260</i>
# P-XL-028-095SF-ACE-NIL-08.000	28	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	45.26	51.0	23.80	15.90
		<i>0.374</i>	<i>0.315</i>				<i>1.782</i>	<i>2.008</i>	<i>0.937</i>	<i>0.626</i>
# P-XL-028-095SF-PFR-AIS-08.000	28	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	45.26	51.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	
# P-XL-028-095FF-PFR-AIS-08.000	28	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	45.26	51.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.782</i>	<i>2.008</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-028-096FF-ALA-SET-09.525	28	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.26	50.8	23.02	30.16
		<i>0.374</i>	<i>0.375</i>				<i>1.782</i>	<i>2.000</i>	<i>0.906</i>	<i>1.187</i>
# P-XL-028-096FF-ALA-SNH-09.525	28	9.5	9.525	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	45.26	50.8	14.29	No Hub
		<i>0.374</i>	<i>0.375</i>				<i>1.782</i>	<i>2.000</i>	<i>0.563</i>	
# P-XL-028-096SF-PFR-AIS-09.525	28	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-028-096FF-SBX-SNH-09.525	28	9.5	9.525	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	45.26	50.8	13.89	
		<i>0.374</i>	<i>0.375</i>				<i>1.782</i>	<i>2.000</i>	<i>0.547</i>	
P-XL-028-096FF-SBX-SET-09.525	28	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	45.26	50.8	23.02	30.16
		<i>0.374</i>	<i>0.375</i>				<i>1.782</i>	<i>2.000</i>	<i>0.906</i>	<i>1.187</i>
# P-XL-028-096FF-PFR-AIS-09.525	28	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.26	51.3	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.782</i>	<i>2.020</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-028-096P-ALA-SET-09.525	28	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	45.26		23.81	31.75
		<i>0.374</i>	<i>0.375</i>				<i>1.782</i>		<i>0.937</i>	<i>1.250</i>
# P-XL-028-096FF-NFR-SLC-15.875	28	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	45.26	51.1	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.782</i>	<i>2.012</i>	<i>0.609</i>	
# P-XL-028-096SF-NFR-SLC-15.875	28	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	45.26	51.1	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.782</i>	<i>2.012</i>	<i>0.580</i>	
# P-XL-029-095SF-PFR-NIL-06.000	29	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	46.87	53.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-029-095FF-PFR-AIS-06.000	29	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	46.87	53.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-029-095SF-PFR-AIS-06.000	29	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	46.87	53.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	
# P-XL-029-095SF-PFR-FLC-06.000	29	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	46.87	53.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-029-095SF-PFR-ALS-06.000	29	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	46.87	53.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-029-095FF-PFR-NIL-06.000	29	9.5	6.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	46.87	53.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-029-095FF-PFR-FLC-06.000	29	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	46.87	53.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-029-095FF-PFR-ALS-06.000	29	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	46.87	53.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-029-096FF-PFR-SET-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	46.87	52.8	20.64	19.05
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-029-096FF-PFR-AIS-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096FF-PFR-ALS-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096FF-PFR-FLC-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096FF-PFR-NIL-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096SF-PFR-AIS-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-029-096SF-PFR-ALS-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096SF-PFR-FLC-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096SF-PFR-NIL-06.350	29	9.5	6.350	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	46.87	52.8	20.60	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.845</i>	<i>2.079</i>	<i>0.811</i>	<i>0.875</i>
# P-XL-029-096FF-NFR-SET-06.363	29	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	46.87	52.6	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.845</i>	<i>2.071</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-029-096SF-NFR-SET-06.363	29	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	46.87	52.6	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.845</i>	<i>2.071</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-029-096FF-PFR-AIS-07.938	29	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096P-ALA-SET-07.938	29	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	46.87		23.81	33.34
		<i>0.374</i>	<i>0.313</i>				<i>1.845</i>		<i>0.937</i>	<i>1.313</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-029-096SF-PFR-AIS-07.938	29	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-095SF-PFR-AIS-08.000	29	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	46.87	53.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	
# P-XL-029-095FF-PFR-AIS-08.000	29	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	46.87	53.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.845</i>	<i>2.087</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-029-096FF-PFR-AIS-09.525	29	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096SF-PFR-AIS-09.525	29	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	46.87	52.8	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.845</i>	<i>2.079</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-029-096FF-NFR-SLC-15.875	29	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	46.87	52.6	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.845</i>	<i>2.071</i>	<i>0.609</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-029-096SF-NFR-SLC-15.875	29	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	46.87	52.6	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.845</i>	<i>2.071</i>	<i>0.580</i>	
# P-XL-030-060FF-ALA-SET-08.000	30	6.0	8.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	19.80	33.00
		<i>0.236</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.780</i>	<i>1.299</i>
# P-XL-030-063FF-ALA-SET-06.350	30	6.4	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	19.84	33.34
		<i>0.252</i>	<i>0.250</i>				<i>1.909</i>	<i>2.126</i>	<i>0.781</i>	<i>1.313</i>
# P-XL-030-063FF-ALA-SET-09.525	30	6.4	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	19.84	33.34
		<i>0.252</i>	<i>0.375</i>				<i>1.909</i>	<i>2.126</i>	<i>0.781</i>	<i>1.313</i>
# P-XL-030-095SF-PFR-AIS-06.000	30	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	48.49	54.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.236</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	
# P-XL-030-095FF-PFR-AIS-06.000	30	9.5	6.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	48.49	54.0	20.60	22.00
		<i>0.374</i>	<i>0.236</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-030-096SF-PFR-AIS-06.350	30	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096FF-PFR-AIS-06.350	30	9.5	6.350	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.250</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096FF-ALA-SNH-06.350	30	9.5	6.350	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	48.49	54.0	14.29	No Hub
		<i>0.374</i>	<i>0.250</i>				<i>1.909</i>	<i>2.126</i>	<i>0.563</i>	
# P-XL-030-096FF-ALA-SET-06.350	30	9.5	6.350	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.250</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096FF-SBX-SET-06.350	30	9.5	6.350	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.250</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096FF-SBX-SNH-06.350	30	9.5	6.350	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	48.49	54.0	13.89	
		<i>0.374</i>	<i>0.250</i>				<i>1.909</i>	<i>2.126</i>	<i>0.547</i>	
# P-XL-030-096P-ALA-SET-06.350	30	9.5	6.350	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	48.49		23.81	34.93
		<i>0.374</i>	<i>0.250</i>				<i>1.909</i>		<i>0.937</i>	<i>1.375</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-030-096FF-NFR-SET-06.363	30	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	48.49	54.4	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.909</i>	<i>2.142</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-030-096SF-NFR-SET-06.363	30	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	48.49	54.4	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>1.909</i>	<i>2.142</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-030-096P-ALA-SET-07.938	30	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	48.49		23.81	34.93
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>		<i>0.937</i>	<i>1.375</i>
# P-XL-030-096SF-ACE-NIL-07.938	30	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	48.49	54.0	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.126</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-030-096FF-SBX-SET-07.938	30	9.5	7.938	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096FF-PFR-SET-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	48.49	54.4	20.64	19.05
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.750</i>
# P-XL-030-096SF-PFR-AIS-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-030-096FF-PFR-NIL-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096FF-PFR-FLC-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096FF-PFR-ALS-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096SF-PFR-FLC-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096FF-PFR-AIS-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096SF-PFR-NIL-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	48.49	54.4	20.60	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.811</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-030-096SF-PFR-ALS-07.938	30	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096FF-ALU-SET-07.938	30	9.5	7.938	Aluminium	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096FF-ALA-SET-07.938	30	9.5	7.938	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096FF-ACE-NIL-07.938	30	9.5	7.938	Acetal	No Locking Device	FF_NL_HW (Double Flange)	48.49	54.4	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>1.909</i>	<i>2.142</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-030-095FF-PFR-FLC-08.000	30	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	48.49	54.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-030-095FF-PFR-AIS-08.000	30	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	48.49	54.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	<i>0.866</i>
P-XL-030-095FF-PFR-ALS-08.000	30	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	48.49	54.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-030-095FF-ALA-SNH-08.000	30	9.5	8.000	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	48.49	54.0	14.20	
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.559</i>	
# P-XL-030-095FF-PFR-NIL-08.000	30	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	48.49	54.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	<i>0.866</i>
P-XL-030-095FF-SBX-SNH-08.000	30	9.5	8.000	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	48.49	54.0	13.80	
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.543</i>	
# P-XL-030-095SF-ACE-NIL-08.000	30	9.5	8.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	48.49	54.0	25.40	17.50
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>1.000</i>	<i>0.689</i>
# P-XL-030-095SF-PFR-AIS-08.000	30	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	48.49	54.0	20.60	22.000 (Flanged Side) 13.000 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	
# P-XL-030-095SF-PFR-ALS-08.000	30	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	48.49	54.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-030-095SF-PFR-FLC-08.000	30	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	48.49	54.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-030-095SF-PFR-NIL-08.000	30	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	48.49	54.0	20.60	22.000 (Flanged Side) 12.700 (Unflanged Side)
		<i>0.374</i>	<i>0.315</i>				<i>1.909</i>	<i>2.126</i>	<i>0.811</i>	
# P-XL-030-096FF-ALA-SET-09.525	30	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.375</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096FF-SBX-SNH-09.525	30	9.5	9.525	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	48.49	54.0	13.89	
		<i>0.374</i>	<i>0.375</i>				<i>1.909</i>	<i>2.126</i>	<i>0.547</i>	
# P-XL-030-096FF-SBX-SET-09.525	30	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.375</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096P-ALA-SET-09.525	30	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	48.49		23.81	34.93
		<i>0.374</i>	<i>0.375</i>				<i>1.909</i>		<i>0.937</i>	<i>1.375</i>
# P-XL-030-096SF-PFR-AIS-09.525	30	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-096FF-ALA-SNH-09.525	30	9.5	9.525	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	48.49	54.0	14.29	No Hub
		<i>0.374</i>	<i>0.375</i>				<i>1.909</i>	<i>2.126</i>	<i>0.563</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-030-096FF-PFR-AIS-09.525	30	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	48.49	54.4	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.909</i>	<i>2.142</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-030-095P-ALA-SET-10.000	30	9.5	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	48.49		23.80	35.00
		<i>0.374</i>	<i>0.394</i>				<i>1.909</i>		<i>0.937</i>	<i>1.378</i>
# P-XL-030-095FF-ALA-SET-10.000	30	9.5	10.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.00	33.00
		<i>0.374</i>	<i>0.394</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.299</i>
# P-XL-030-096FF-ALA-SET-12.700	30	9.5	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.500</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096FF-SBX-SET-12.700	30	9.5	12.700	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	48.49	54.0	23.02	33.34
		<i>0.374</i>	<i>0.500</i>				<i>1.909</i>	<i>2.126</i>	<i>0.906</i>	<i>1.313</i>
# P-XL-030-096FF-NFR-SLC-15.875	30	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	48.49	54.4	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>1.909</i>	<i>2.142</i>	<i>0.609</i>	
# P-XL-030-096SF-NFR-SLC-15.875	30	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	48.49	54.4	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>1.909</i>	<i>2.142</i>	<i>0.580</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-031-096FF-PFR-AIS-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	50.11	55.9	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-031-096SF-PFR-AIS-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	50.11	55.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-031-096SF-PFR-ALS-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	50.11	55.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-031-096FF-PFR-NIL-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	50.11	55.9	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-031-096SF-PFR-SET-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	50.11	55.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-031-096FF-PFR-FLC-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	50.11	55.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-031-096SF-PFR-FLC-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	50.11	55.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-031-096FF-PFR-SET-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_G_H (Double Flange)	50.11	55.9	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-031-096FF-PFR-ALS-07.938	31	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	50.11	55.9	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>1.973</i>	<i>2.201</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-031-095SF-PFR-AIS-08.000	31	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	50.11	56.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.973</i>	<i>2.205</i>	<i>0.811</i>	<i>0.866</i>
P-XL-031-095SF-PFR-ALS-08.000	31	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	50.11	56.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.973</i>	<i>2.205</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-031-095SF-PFR-FLC-08.000	31	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	50.11	56.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.973</i>	<i>2.205</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-031-095SF-PFR-NIL-08.000	31	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	50.11	56.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.973</i>	<i>2.205</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-031-095FF-PFR-NIL-08.000	31	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	50.11	56.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.973</i>	<i>2.205</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-031-095FF-PFR-FLC-08.000	31	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	50.11	56.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.973</i>	<i>2.205</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-031-095FF-PFR-AIS-08.000	31	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	50.11	56.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.973</i>	<i>2.205</i>	<i>0.874</i>	<i>0.866</i>
P-XL-031-095FF-PFR-ALS-08.000	31	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	50.11	56.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>1.973</i>	<i>2.205</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-031-096SF-PFR-AIS-09.525	31	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	50.11	55.9	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.973</i>	<i>2.201</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-031-096FF-PFR-AIS-09.525	31	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	50.11	55.9	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>1.973</i>	<i>2.201</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-031-095SF-PFR-AIS-10.000	31	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	50.11	56.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>1.973</i>	<i>2.205</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-031-095FF-PFR-AIS-10.000	31	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	50.11	56.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>1.973</i>	<i>2.205</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-031-095SF-PFR-AIS-12.000	31	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	50.11	56.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>1.973</i>	<i>2.205</i>	<i>0.811</i>	<i>0.866</i>
P-XL-031-095FF-PFR-AIS-12.000	31	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	50.11	56.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>1.973</i>	<i>2.205</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-031-096SF-PFR-AIS-12.700	31	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	50.11	55.9	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>1.973</i>	<i>2.201</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-031-096FF-PFR-AIS-12.700	31	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	50.11	55.9	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>1.973</i>	<i>2.201</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-032-096FF-NFR-SET-06.363	32	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	51.72	57.4	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.036</i>	<i>2.260</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-032-096SF-NFR-SET-06.363	32	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	51.72	57.4	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.036</i>	<i>2.260</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-032-096P-NFR-SET-06.363	32	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	P_G_HW (Unflanged)	51.72		22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.036</i>		<i>0.891</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-032-096FF-PFR-FLC-07.938	32	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-032-096FF-ALA-SNH-07.938	32	9.5	7.938	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	51.72	57.2	14.29	No Hub
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.252</i>	<i>0.563</i>	
# P-XL-032-096FF-ACE-NIL-07.938	32	9.5	7.938	Acetal	No Locking Device	FF_NL_HW (Double Flange)	51.72	57.5	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.264</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-032-096FF-PFR-AIS-07.938	32	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	51.72	57.7	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-032-096SF-PFR-FLC-07.938	32	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-032-096SF-ACE-NIL-07.938	32	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	51.72	57.2	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.252</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-032-096SF-PFR-AIS-07.938	32	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-032-096FF-PFR-ALS-07.938	32	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-032-096SF-PFR-ALS-07.938	32	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-032-096FF-PFR-NIL-07.938	32	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	51.72	57.7	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-032-096SF-POL-SET-07.938	32	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-032-096FF-SBX-SNH-07.938	32	9.5	7.938	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	51.72	57.2	13.89	
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.252</i>	<i>0.547</i>	
# P-XL-032-096P-ALU-SET-07.938	32	9.5	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	51.72		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-032-096P-ALA-SET-07.938	32	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	51.72		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>		<i>1.000</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-032-096SF-PFR-SET-07.938	32	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-032-095SF-PFR-NIL-08.000	32	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	51.72	58.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.283</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-032-095SF-PFR-ALS-08.000	32	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	51.72	58.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.283</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-032-095SF-PFR-AIS-08.000	32	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	51.72	58.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.283</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-032-095SF-ACE-NIL-08.000	32	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	51.72	57.0	23.80	17.50
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.244</i>	<i>0.937</i>	<i>0.689</i>
# P-XL-032-095FF-PFR-NIL-08.000	32	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	51.72	58.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.283</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-032-095FF-PFR-FLC-08.000	32	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	51.72	58.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.283</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-032-095FF-PFR-ALS-08.000	32	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	51.72	58.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.283</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-032-095FF-PFR-AIS-08.000	32	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	51.72	58.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.283</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-032-095SF-PFR-FLC-08.000	32	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	51.72	58.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.036</i>	<i>2.283</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-032-096SF-PFR-AIS-09.525	32	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-032-096P-ALA-SET-09.525	32	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	51.72		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>2.036</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-032-096FF-SBX-SET-09.525	32	9.5	9.525	Steel, Black Oxide Finish	Set Screw	FF_G_H (Double Flange)	51.72	57.2	23.02	36.51
		<i>0.374</i>	<i>0.375</i>				<i>2.036</i>	<i>2.252</i>	<i>0.906</i>	<i>1.437</i>
# P-XL-032-096FF-SBX-SNH-09.525	32	9.5	9.525	Steel, Black Oxide Finish	Set Screw Between Teeth	FF_G_0 (Double Flange)	51.72	57.2	13.89	
		<i>0.374</i>	<i>0.375</i>				<i>2.036</i>	<i>2.252</i>	<i>0.547</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-032-096FF-PFR-AIS-09.525	32	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	51.72	57.7	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.036</i>	<i>2.272</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-032-096FF-ALA-SET-09.525	32	9.5	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	51.72	57.2	23.02	36.51
		<i>0.374</i>	<i>0.375</i>				<i>2.036</i>	<i>2.252</i>	<i>0.906</i>	<i>1.437</i>
# P-XL-032-096FF-ALA-SNH-09.525	32	9.5	9.525	Aluminium, Clear Anodised	Set Screw Between Teeth	FF_G_0 (Double Flange)	51.72	57.2	14.29	No Hub
		<i>0.374</i>	<i>0.375</i>				<i>2.036</i>	<i>2.252</i>	<i>0.563</i>	
# P-XL-032-095SF-PFR-AIS-10.000	32	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	51.72	58.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.036</i>	<i>2.283</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-032-095FF-PFR-AIS-10.000	32	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	51.72	58.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.036</i>	<i>2.283</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-032-095P-ALA-SET-10.000	32	9.5	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	51.72		25.40	38.00
		<i>0.374</i>	<i>0.394</i>				<i>2.036</i>		<i>1.000</i>	<i>1.496</i>
P-XL-032-095SF-PFR-AIS-12.000	32	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	51.72	58.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.036</i>	<i>2.283</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-XL-032-095FF-ALA-SET-12.000	32	9.5	12.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	51.72	57.0	23.00	37.00
		<i>0.374</i>	<i>0.472</i>				<i>2.036</i>	<i>2.244</i>	<i>0.906</i>	<i>1.457</i>
# P-XL-032-095FF-PFR-AIS-12.000	32	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	51.72	58.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.036</i>	<i>2.283</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-032-096P-ALA-SET-12.700	32	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	51.72		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>2.036</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-032-096SF-PFR-AIS-12.700	32	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	51.72	57.7	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.036</i>	<i>2.272</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-032-096FF-PFR-AIS-12.700	32	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	51.72	57.7	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.036</i>	<i>2.272</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-032-096FF-NFR-SLC-15.875	32	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	51.72	57.7	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>2.036</i>	<i>2.272</i>	<i>0.609</i>	
# P-XL-032-096SF-NFR-SLC-15.875	32	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	51.72	57.7	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>2.036</i>	<i>2.272</i>	<i>0.580</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-034-096FF-PFR-AIS-07.938	34	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	54.96	61.0	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-034-096FF-PFR-ALS-07.938	34	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-034-096FF-PFR-FLC-07.938	34	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-034-096FF-PFR-NIL-07.938	34	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	54.96	61.0	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-034-096SF-PFR-AIS-07.938	34	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-034-096SF-PFR-ALS-07.938	34	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-034-096SF-PFR-FLC-07.938	34	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-034-096SF-POL-SET-07.938	34	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-034-096SF-PFR-SET-07.938	34	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-034-095SF-PFR-NIL-08.000	34	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	54.96	61.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.164</i>	<i>2.402</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-034-095SF-PFR-ALS-08.000	34	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	54.96	61.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.164</i>	<i>2.402</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-034-095FF-PFR-NIL-08.000	34	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	54.96	61.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.164</i>	<i>2.402</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-034-095FF-PFR-AIS-08.000	34	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	54.96	61.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.164</i>	<i>2.402</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-034-095FF-PFR-FLC-08.000	34	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	54.96	61.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.164</i>	<i>2.402</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-034-095SF-PFR-AIS-08.000	34	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	54.96	61.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.164</i>	<i>2.402</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-034-095SF-PFR-FLC-08.000	34	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	54.96	61.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.164</i>	<i>2.402</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-034-095FF-PFR-ALS-08.000	34	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	54.96	61.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.164</i>	<i>2.402</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-034-095SF-PFR-AIS-09.000	34	9.5	9.000	Polycarbonate	Set Screw	SF_G_HW (Single Flange)	54.96			
		<i>0.374</i>	<i>0.354</i>				<i>2.164</i>			
# P-XL-034-096SF-PFR-AIS-09.525	34	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-034-096FF-PFR-AIS-09.525	34	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	54.96	61.0	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.164</i>	<i>2.402</i>	<i>0.875</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-034-095FF-PFR-AIS-10.000	34	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	54.96	61.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.164</i>	<i>2.402</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-034-095SF-PFR-AIS-10.000	34	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	54.96	61.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.164</i>	<i>2.402</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-034-095SF-PFR-AIS-12.000	34	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	54.96	61.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.164</i>	<i>2.402</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-034-095FF-PFR-AIS-12.000	34	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	54.96	61.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.164</i>	<i>2.402</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-034-096SF-PFR-AIS-12.700	34	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	54.96	61.0	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.164</i>	<i>2.402</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-034-096FF-PFR-AIS-12.700	34	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	54.96	61.0	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.164</i>	<i>2.402</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-035-096FF-PFR-ALS-07.938	35	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-035-096FF-PFR-AIS-07.938	35	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	56.57	62.5	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-035-096SF-POL-SET-07.938	35	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-035-096SF-PFR-SET-07.938	35	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-035-096SF-PFR-FLC-07.938	35	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-035-096SF-PFR-ALS-07.938	35	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-035-096SF-PFR-AIS-07.938	35	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-035-096FF-PFR-FLC-07.938	35	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-035-096FF-PFR-NIL-07.938	35	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	56.57	62.5	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.227</i>	<i>2.461</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-035-095FF-PFR-FLC-08.000	35	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	56.57	63.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.227</i>	<i>2.480</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-035-095SF-PFR-ALS-08.000	35	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	56.57	63.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.227</i>	<i>2.480</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-035-095FF-PFR-ALS-08.000	35	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	56.57	63.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.227</i>	<i>2.480</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-035-095FF-PFR-NIL-08.000	35	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	56.57	63.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.227</i>	<i>2.480</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-035-095SF-PFR-AIS-08.000	35	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	56.57	63.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.227</i>	<i>2.480</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-035-095FF-PFR-AIS-08.000	35	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	56.57	63.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.227</i>	<i>2.480</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-035-095SF-PFR-NIL-08.000	35	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	56.57	63.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.227</i>	<i>2.480</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-035-095SF-PFR-FLC-08.000	35	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	56.57	63.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.227</i>	<i>2.480</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-035-096FF-PFR-AIS-09.525	35	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	56.57	62.5	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.227</i>	<i>2.461</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-035-096SF-PFR-AIS-09.525	35	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-035-095SF-PFR-AIS-10.000	35	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	56.57	63.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.227</i>	<i>2.480</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-035-095FF-PFR-AIS-10.000	35	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	56.57	63.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.227</i>	<i>2.480</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-035-095FF-PFR-AIS-12.000	35	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	56.57	63.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.227</i>	<i>2.480</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-035-095SF-PFR-AIS-12.000	35	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	56.57	63.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.227</i>	<i>2.480</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-035-096FF-PFR-AIS-12.700	35	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	56.57	62.5	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.227</i>	<i>2.461</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-035-096SF-PFR-AIS-12.700	35	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	56.57	62.5	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.227</i>	<i>2.461</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-036-096P-NFR-SET-06.363	36	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	P_G_HW (Unflanged)	58.19		22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.291</i>		<i>0.891</i>	<i>0.875</i>
# P-XL-036-096SF-NFR-SET-06.363	36	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	58.19	63.8	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.291</i>	<i>2.512</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-036-096FF-NFR-SET-06.363	36	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	58.19	63.8	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.291</i>	<i>2.512</i>	<i>0.922</i>	<i>0.875</i>
P-XL-036-096FF-PFR-ALS-07.938	36	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-036-096FF-PFR-FLC-07.938	36	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-036-096FF-PFR-NIL-07.938	36	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	58.19	64.3	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.875</i>	<i>0.875</i>
P-XL-036-096P-ALA-SET-07.938	36	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	58.19		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-036-096FF-PFR-AIS-07.938	36	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	58.19	64.3	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-036-096P-ALU-SET-07.938	36	9.5	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	58.19		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-036-096SF-ACE-NIL-07.938	36	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	58.19	64.3	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-036-096SF-PFR-AIS-07.938	36	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-036-096SF-PFR-ALS-07.938	36	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-036-096SF-PFR-FLC-07.938	36	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-036-096SF-POL-SET-07.938	36	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-036-096SF-PFR-SET-07.938	36	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-036-096FF-ACE-NIL-07.938	36	9.5	7.938	Acetal	No Locking Device	FF_NL_HW (Double Flange)	58.19	63.9	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.291</i>	<i>2.516</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-036-095FF-PFR-FLC-08.000	36	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	58.19	64.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-036-095SF-PFR-NIL-08.000	36	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	58.19	64.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-036-095FF-PFR-AIS-08.000	36	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	58.19	64.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.874</i>	<i>0.866</i>
P-XL-036-095FF-PFR-ALS-08.000	36	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	58.19	64.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-036-095SF-PFR-FLC-08.000	36	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	58.19	64.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-036-095SF-PFR-ALS-08.000	36	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	58.19	64.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-036-095FF-PFR-NIL-08.000	36	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	58.19	64.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-036-095SF-ACE-NIL-08.000	36	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	58.19	64.0	23.80	17.50
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.937</i>	<i>0.689</i>
# P-XL-036-095SF-PFR-AIS-08.000	36	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	58.19	64.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.291</i>	<i>2.520</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-036-096SF-PFR-AIS-09.525	36	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-036-096FF-PFR-AIS-09.525	36	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	58.19	64.3	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.291</i>	<i>2.531</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-036-096P-ALA-SET-09.525	36	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	58.19		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>2.291</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-036-095FF-PFR-AIS-10.000	36	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	58.19	64.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.291</i>	<i>2.520</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-036-095SF-PFR-AIS-10.000	36	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	58.19	64.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.291</i>	<i>2.520</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-036-095P-ALA-SET-10.000	36	9.5	10.000	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	58.19		25.40	38.00
		<i>0.374</i>	<i>0.394</i>				<i>2.291</i>		<i>1.000</i>	<i>1.496</i>
# P-XL-036-095SF-PFR-AIS-12.000	36	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	58.19	64.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.291</i>	<i>2.520</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-036-095FF-PFR-AIS-12.000	36	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	58.19	64.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.291</i>	<i>2.520</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-036-096SF-PFR-AIS-12.700	36	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	58.19	64.3	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.291</i>	<i>2.531</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-036-096FF-PFR-AIS-12.700	36	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	58.19	64.3	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.291</i>	<i>2.531</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-036-096P-ALA-SET-12.700	36	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_H (Unflanged)	58.19		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>2.291</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-036-096FF-NFR-SLC-15.875	36	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	58.19	64.0	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>2.291</i>	<i>2.520</i>	<i>0.609</i>	
# P-XL-036-096SF-NFR-SLC-15.875	36	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	58.19	64.0	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>2.291</i>	<i>2.520</i>	<i>0.580</i>	
# P-XL-037-096SF-PFR-SET-07.938	37	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-037-096SF-PFR-FLC-07.938	37	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-037-096SF-PFR-ALS-07.938	37	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-037-096SF-POL-SET-07.938	37	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-037-096SF-PFR-AIS-07.938	37	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-037-096FF-PFR-NIL-07.938	37	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	59.81	65.8	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-037-096FF-PFR-AIS-07.938	37	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	59.81	65.8	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-037-096FF-PFR-ALS-07.938	37	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-037-096FF-PFR-FLC-07.938	37	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-037-095FF-PFR-AIS-09.000	37	9.5	8.000	Polycarbonate	Set Screw	FF_G_HW (Double Flange)	59.81			
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>			
# P-XL-037-095FF-PFR-AIS-08.000	37	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	59.81	66.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>	<i>2.598</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-037-095FF-PFR-ALS-08.000	37	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	59.81	66.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>	<i>2.598</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-037-095FF-PFR-FLC-08.000	37	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	59.81	66.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>	<i>2.598</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-037-095FF-PFR-NIL-08.000	37	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	59.81	66.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>	<i>2.598</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-037-095SF-PFR-AIS-08.000	37	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	59.81	66.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>	<i>2.598</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-037-095SF-PFR-ALS-08.000	37	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	59.81	66.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>	<i>2.598</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-037-095SF-PFR-FLC-08.000	37	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	59.81	66.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>	<i>2.598</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-037-095SF-PFR-NIL-08.000	37	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	59.81	66.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.355</i>	<i>2.598</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-037-096SF-PFR-AIS-09.525	37	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-037-096FF-PFR-AIS-09.525	37	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	59.81	65.8	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.355</i>	<i>2.591</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-037-095FF-PFR-AIS-10.000	37	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	59.81	66.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.355</i>	<i>2.598</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-037-095SF-PFR-AIS-10.000	37	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	59.81	66.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.355</i>	<i>2.598</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-037-095FF-PFR-AIS-12.000	37	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	59.81	66.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.355</i>	<i>2.598</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-037-095SF-PFR-AIS-12.000	37	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	59.81	66.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.355</i>	<i>2.598</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-037-096SF-PFR-AIS-12.700	37	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	59.81	65.8	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.355</i>	<i>2.591</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-037-096FF-PFR-AIS-12.700	37	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	59.81	65.8	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.355</i>	<i>2.591</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-039-096SF-PFR-FLC-07.938	39	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-039-096SF-PFR-SET-07.938	39	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-039-096SF-PFR-ALS-07.938	39	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-039-096FF-PFR-AIS-07.938	39	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.04	68.8	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-039-096SF-POL-SET-07.938	39	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-039-096SF-PFR-AIS-07.938	39	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-039-096FF-PFR-NIL-07.938	39	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	63.04	68.8	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-039-096FF-PFR-FLC-07.938	39	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-039-096FF-PFR-ALS-07.938	39	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-039-095SF-PFR-FLC-08.000	39	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	63.04	69.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.482</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-XL-039-095SF-PFR-ALS-08.000	39	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	63.04	69.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.482</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-039-095SF-PFR-AIS-08.000	39	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	63.04	69.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.482</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-039-095FF-PFR-AIS-08.000	39	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	63.04	69.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.482</i>	<i>2.717</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-039-095FF-PFR-FLC-08.000	39	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	63.04	69.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.482</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-039-095FF-PFR-ALS-08.000	39	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	63.04	69.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.482</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-039-095FF-PFR-NIL-08.000	39	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	63.04	69.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.482</i>	<i>2.717</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-039-096FF-PFR-AIS-09.525	39	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.04	68.8	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.482</i>	<i>2.709</i>	<i>0.875</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-039-096SF-PFR-AIS-09.525	39	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-039-095FF-PFR-AIS-10.000	39	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	63.04	69.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.482</i>	<i>2.717</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-039-095SF-PFR-AIS-10.000	39	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	63.04	69.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.482</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-039-095SF-PFR-AIS-12.000	39	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	63.04	69.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.482</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-039-095FF-PFR-AIS-12.000	39	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	63.04	69.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.482</i>	<i>2.717</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-039-096FF-PFR-AIS-12.700	39	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.04	68.8	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.482</i>	<i>2.709</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-039-096SF-PFR-AIS-12.700	39	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	63.04	68.8	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.482</i>	<i>2.709</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-040-096FF-NFR-SET-06.363	40	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	64.65	70.6	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.545</i>	<i>2.780</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-040-096P-NFR-SET-06.363	40	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	P_G_HW (Unflanged)	64.65		22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.545</i>		<i>0.891</i>	<i>0.875</i>
# P-XL-040-096SF-NFR-SET-06.363	40	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	64.65	70.6	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.545</i>	<i>2.780</i>	<i>0.891</i>	<i>0.875</i>
P-XL-040-096P-ALA-SET-07.938	40	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	64.65		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-040-096FF-ACE-NIL-07.938	40	9.5	7.938	Acetal	No Locking Device	FF_NL_HW (Double Flange)	64.65	70.6	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-040-096FF-PFR-AIS-07.938	40	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	64.65	70.6	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-040-096SF-PFR-AIS-07.938	40	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-040-096FF-PFR-ALS-07.938	40	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-040-096SF-PFR-FLC-07.938	40	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-040-096SF-PFR-SET-07.938	40	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-040-096FF-PFR-FLC-07.938	40	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-040-096SF-POL-SET-07.938	40	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-040-096P-ALU-SET-07.938	40	9.5	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	64.65		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-040-096SF-ACE-NIL-07.938	40	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	64.65	69.9	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.752</i>	<i>1.000</i>	<i>0.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-040-096SF-PFR-ALS-07.938	40	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-040-096FF-PFR-NIL-07.938	40	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	64.65	70.6	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.545</i>	<i>2.780</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-040-095SF-PFR-NIL-08.000	40	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	64.65	71.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.795</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-040-095SF-PFR-FLC-08.000	40	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	64.65	71.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.795</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-040-095SF-PFR-ALS-08.000	40	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	64.65	71.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.795</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-040-095SF-PFR-AIS-08.000	40	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	64.65	71.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.795</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-040-095SF-ACE-NIL-08.000	40	9.5	8.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	64.65	70.0	25.40	17.50
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.756</i>	<i>1.000</i>	<i>0.689</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-040-095FF-PFR-NIL-08.000	40	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	64.65	71.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.795</i>	<i>0.874</i>	<i>0.866</i>
P-XL-040-095FF-PFR-ALS-08.000	40	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	64.65	71.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.795</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-040-095FF-PFR-AIS-08.000	40	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	64.65	71.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.795</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-040-095FF-PFR-FLC-08.000	40	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	64.65	71.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.545</i>	<i>2.795</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-040-096SF-PFR-AIS-09.525	40	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-040-096P-ALA-SET-09.525	40	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	64.65		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>2.545</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-040-096FF-PFR-AIS-09.525	40	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	64.65	70.6	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.545</i>	<i>2.780</i>	<i>0.875</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-040-095SF-PFR-AIS-10.000	40	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	64.65	71.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.545</i>	<i>2.795</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-040-095P-ALU-SET-10.000	40	9.5	10.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	64.65		25.40	38.00
		<i>0.374</i>	<i>0.394</i>				<i>2.545</i>		<i>1.000</i>	<i>1.496</i>
# P-XL-040-095FF-PFR-AIS-10.000	40	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	64.65	71.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.545</i>	<i>2.795</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-040-095SF-PFR-AIS-12.000	40	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	64.65	71.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.545</i>	<i>2.795</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-040-095FF-PFR-AIS-12.000	40	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	64.65	71.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.545</i>	<i>2.795</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-040-096SF-PFR-AIS-12.700	40	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	64.65	70.6	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.545</i>	<i>2.780</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-040-096FF-PFR-AIS-12.700	40	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	64.65	70.6	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.545</i>	<i>2.780</i>	<i>0.875</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-040-096P-ALA-SET-12.700	40	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	64.65		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>2.545</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-040-096SF-NFR-SLC-15.875	40	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	64.65	70.6	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>2.545</i>	<i>2.780</i>	<i>0.580</i>	
# P-XL-040-096FF-NFR-SLC-15.875	40	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	64.65	70.6	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>2.545</i>	<i>2.780</i>	<i>0.609</i>	
# P-XL-042-096P-NFR-SET-06.363	42	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	P_G_HW (Unflanged)	67.89		22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.673</i>		<i>0.891</i>	<i>0.875</i>
# P-XL-042-096SF-NFR-SET-06.363	42	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	67.89	73.7	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.673</i>	<i>2.902</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-042-096FF-NFR-SET-06.363	42	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	67.89	73.7	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>2.673</i>	<i>2.902</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-042-096P-ALU-SET-07.938	42	9.5	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	67.89		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>		<i>1.000</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-042-096P-ALA-SET-07.938	42	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	67.89		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-042-096FF-PFR-AIS-07.938	42	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	67.89	74.2	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-042-096SF-POL-SET-07.938	42	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-042-096FF-PFR-FLC-07.938	42	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-042-096SF-ACE-NIL-07.938	42	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	67.89	73.8	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.906</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-042-096SF-PFR-AIS-07.938	42	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-042-096SF-PFR-ALS-07.938	42	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-042-096SF-PFR-SET-07.938	42	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-042-096FF-PFR-ALS-07.938	42	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-042-096SF-PFR-FLC-07.938	42	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-042-096FF-PFR-NIL-07.938	42	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	67.89	74.2	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.921</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-042-096FF-ACE-NIL-07.938	42	9.5	7.938	Acetal	No Locking Device	FF_NL_HW (Double Flange)	67.89	73.8	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.673</i>	<i>2.906</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-042-095FF-PFR-FLC-08.000	42	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	67.89	74.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-042-095FF-PFR-AIS-08.000	42	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	67.89	74.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-XL-042-095FF-PFR-ALS-08.000	42	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	67.89	74.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-042-095FF-PFR-NIL-08.000	42	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	67.89	74.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-042-095SF-ACE-NIL-08.000	42	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	67.89	74.0	23.80	17.50
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.937</i>	<i>0.689</i>
# P-XL-042-095SF-PFR-AIS-08.000	42	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	67.89	74.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-042-095SF-PFR-NIL-08.000	42	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	67.89	74.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-042-095SF-PFR-FLC-08.000	42	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	67.89	74.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-042-095SF-PFR-ALS-08.000	42	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	67.89	74.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.673</i>	<i>2.913</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-042-096SF-PFR-AIS-09.525	42	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-042-096FF-PFR-AIS-09.525	42	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	67.89	74.2	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.673</i>	<i>2.921</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-042-096P-ALA-SET-09.525	42	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	67.89		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>2.673</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-042-095P-ALU-SET-10.000	42	9.5	10.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	67.89		25.40	38.00
		<i>0.374</i>	<i>0.394</i>				<i>2.673</i>		<i>1.000</i>	<i>1.496</i>
# P-XL-042-095SF-PFR-AIS-10.000	42	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	67.89	74.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.673</i>	<i>2.913</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-042-095FF-PFR-AIS-10.000	42	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	67.89	74.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.673</i>	<i>2.913</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-042-095FF-PFR-AIS-12.000	42	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	67.89	74.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.673</i>	<i>2.913</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-042-095SF-PFR-AIS-12.000	42	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	67.89	74.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.673</i>	<i>2.913</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-042-096P-ALA-SET-12.700	42	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	67.89		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>2.673</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-042-096FF-PFR-AIS-12.700	42	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	67.89	74.2	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.673</i>	<i>2.921</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-042-096SF-PFR-AIS-12.700	42	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	67.89	74.2	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.673</i>	<i>2.921</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-042-096SF-NFR-SLC-15.875	42	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	67.89	73.7	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>2.673</i>	<i>2.902</i>	<i>0.580</i>	
# P-XL-042-096FF-NFR-SLC-15.875	42	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	67.89	73.7	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>2.673</i>	<i>2.902</i>	<i>0.609</i>	
# P-XL-044-096P-ALA-SET-07.938	44	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	71.12		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>		<i>1.000</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-044-096FF-PFR-AIS-07.938	44	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	71.12	77.2	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-044-096FF-PFR-ALS-07.938	44	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-044-096FF-PFR-FLC-07.938	44	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-044-096FF-PFR-NIL-07.938	44	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	71.12	77.2	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-044-096P-ALU-SET-07.938	44	9.5	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	71.12		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-044-096SF-ACE-NIL-07.938	44	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	71.12	77.0	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.031</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-044-096SF-PFR-AIS-07.938	44	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-044-096SF-PFR-ALS-07.938	44	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-044-096SF-PFR-FLC-07.938	44	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-044-096SF-POL-SET-07.938	44	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-044-096FF-ACE-NIL-07.938	44	9.5	7.938	Acetal	No Locking Device	FF_NL_HW (Double Flange)	71.12	77.0	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.031</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-044-096SF-PFR-SET-07.938	44	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-044-095SF-PFR-ALS-08.000	44	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	71.12	77.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-044-095FF-PFR-NIL-08.000	44	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	71.12	77.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.874</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-044-095SF-PFR-NIL-08.000	44	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	71.12	77.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-044-095FF-PFR-AIS-08.000	44	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	71.12	77.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-044-095FF-PFR-ALS-08.000	44	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	71.12	77.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-044-095SF-PFR-FLC-08.000	44	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	71.12	77.0	20.60	26.00
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.811</i>	<i>1.024</i>
# P-XL-044-095FF-PFR-FLC-08.000	44	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	71.12	77.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-044-095SF-ACE-NIL-08.000	44	9.5	8.000	Acetal	No Locking Device	SF_NL_HW (Single Flange)	71.12	77.0	23.80	17.50
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.937</i>	<i>0.689</i>
# P-XL-044-095SF-PFR-AIS-08.000	44	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	71.12	77.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>2.800</i>	<i>3.031</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-044-096P-ALA-SET-09.525	44	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	71.12		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>2.800</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-044-096SF-PFR-AIS-09.525	44	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-044-096FF-PFR-AIS-09.525	44	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	71.12	77.2	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>2.800</i>	<i>3.039</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-044-095SF-PFR-AIS-10.000	44	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	71.12	77.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.800</i>	<i>3.031</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-044-095FF-PFR-AIS-10.000	44	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	71.12	77.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>2.800</i>	<i>3.031</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-044-095P-ALU-SET-10.000	44	9.5	10.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	71.12		25.40	38.00
		<i>0.374</i>	<i>0.394</i>				<i>2.800</i>		<i>1.000</i>	<i>1.496</i>
# P-XL-044-095SF-PFR-AIS-12.000	44	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	71.12	77.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.800</i>	<i>3.031</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-044-095FF-PFR-AIS-12.000	44	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	71.12	77.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>2.800</i>	<i>3.031</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-044-096P-ALA-SET-12.700	44	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	71.12		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>2.800</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-044-096SF-PFR-AIS-12.700	44	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	71.12	77.2	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.800</i>	<i>3.039</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-044-096FF-PFR-AIS-12.700	44	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	71.12	77.2	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>2.800</i>	<i>3.039</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-045-096P-ALA-SET-07.938	45	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	72.74		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>2.864</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-045-096P-ALA-SET-09.525	45	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	72.74		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>2.864</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-045-096P-ALA-SET-12.700	45	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	72.74		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>2.864</i>		<i>1.000</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-048-096P-NFR-SET-06.363	48	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	P_G_HW (Unflanged)	77.59		22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>3.055</i>		<i>0.891</i>	<i>0.875</i>
# P-XL-048-096FF-NFR-SET-06.363	48	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_G_HW (Double Flange)	77.59	83.3	23.42	22.23
		<i>0.374</i>	<i>0.251</i>				<i>3.055</i>	<i>3.280</i>	<i>0.922</i>	<i>0.875</i>
# P-XL-048-096SF-NFR-SET-06.363	48	9.5	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	77.59	83.3	22.62	22.23
		<i>0.374</i>	<i>0.251</i>				<i>3.055</i>	<i>3.280</i>	<i>0.891</i>	<i>0.875</i>
# P-XL-048-096P-ALA-SET-07.938	48	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	77.59		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-048-096FF-ACE-NIL-07.938	48	9.5	7.938	Acetal	No Locking Device	FF_NL_HW (Double Flange)	77.59	83.3	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.280</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-048-096SF-PFR-AIS-07.938	48	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-048-096FF-PFR-ALS-07.938	48	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	FF_G_MW (Double Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-048-096FF-PFR-FLC-07.938	48	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-048-096SF-PFR-ALS-07.938	48	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
P-XL-048-096FF-PFR-NIL-07.938	48	9.5	7.938	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	77.59	83.6	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-048-096FF-PFR-AIS-07.938	48	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	77.59	83.6	22.23	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-048-096SF-PFR-SET-07.938	48	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-048-096SF-ACE-NIL-07.938	48	9.5	7.938	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	77.59	83.3	25.40	17.46
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.280</i>	<i>1.000</i>	<i>0.687</i>
# P-XL-048-096P-ALU-SET-07.938	48	9.5	7.938	Aluminium	Set Screw	P_G_H (Unflanged)	77.59		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>		<i>1.000</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-048-096SF-POL-SET-07.938	48	9.5	7.938	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-048-096SF-PFR-FLC-07.938	48	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.313</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-048-095FF-PFR-ALS-08.000	48	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	FF_G_MW (Double Flange)	77.59	84.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.307</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-048-095SF-PFR-NIL-08.000	48	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	77.59	84.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.307</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-048-095SF-PFR-FLC-08.000	48	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	77.59	84.0	20.60	26.00
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.307</i>	<i>0.811</i>	<i>1.024</i>
# P-XL-048-095SF-PFR-ALS-08.000	48	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	77.59	84.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.307</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-048-095SF-PFR-AIS-08.000	48	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	77.59	83.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.268</i>	<i>0.811</i>	<i>0.866</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-048-095SF-ACE-NIL-08.000	48	9.5	8.000	Acetal	No Locking Device	SF_NL_2HW (Single Flange)	77.59	83.0	25.40	17.50
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.268</i>	<i>1.000</i>	<i>0.689</i>
# P-XL-048-095FF-PFR-FLC-08.000	48	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	FF_FL_HW (Double Flange)	77.59	84.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.307</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-048-095FF-PFR-AIS-08.000	48	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	77.59	83.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.268</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-048-095FF-PFR-NIL-08.000	48	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	FF_NL_HW (Double Flange)	77.59	84.0	22.20	22.00
		<i>0.374</i>	<i>0.315</i>				<i>3.055</i>	<i>3.307</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-048-095SF-PFR-AIS-09.000	48	9.5	9.000	Polycarbonate	Set Screw	SF_G_HW (Single Flange)	77.59			
		<i>0.374</i>	<i>0.354</i>				<i>3.055</i>			
# P-XL-048-096SF-PFR-AIS-09.525	48	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.375</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-048-096FF-PFR-AIS-09.525	48	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	77.59	83.6	22.23	22.23
		<i>0.374</i>	<i>0.375</i>				<i>3.055</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-048-096P-ALA-SET-09.525	48	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	77.59		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>3.055</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-048-095SF-PFR-AIS-10.000	48	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	77.59	83.0	20.60	22.00
		<i>0.374</i>	<i>0.394</i>				<i>3.055</i>	<i>3.268</i>	<i>0.811</i>	<i>0.866</i>
P-XL-048-095FF-PFR-AIS-10.000	48	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	77.59	83.0	22.20	22.00
		<i>0.374</i>	<i>0.394</i>				<i>3.055</i>	<i>3.268</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-048-095P-ALU-SET-12.000	48	9.5	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	77.59		25.40	38.00
		<i>0.374</i>	<i>0.472</i>				<i>3.055</i>		<i>1.000</i>	<i>1.496</i>
# P-XL-048-095FF-PFR-AIS-12.000	48	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	77.59	83.0	22.20	22.00
		<i>0.374</i>	<i>0.472</i>				<i>3.055</i>	<i>3.268</i>	<i>0.874</i>	<i>0.866</i>
# P-XL-048-095SF-PFR-AIS-12.000	48	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	77.59	83.0	20.60	22.00
		<i>0.374</i>	<i>0.472</i>				<i>3.055</i>	<i>3.268</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-048-096P-ALA-SET-12.700	48	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	77.59		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>3.055</i>		<i>1.000</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-XL-048-096FF-PFR-AIS-12.700	48	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	77.59	83.6	22.23	22.23
		<i>0.374</i>	<i>0.500</i>				<i>3.055</i>	<i>3.291</i>	<i>0.875</i>	<i>0.875</i>
# P-XL-048-096SF-PFR-AIS-12.700	48	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	77.59	83.6	20.64	22.23
		<i>0.374</i>	<i>0.500</i>				<i>3.055</i>	<i>3.291</i>	<i>0.813</i>	<i>0.875</i>
# P-XL-048-096SF-NFR-SLC-15.875	48	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	77.59	83.6	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>3.055</i>	<i>3.291</i>	<i>0.580</i>	
# P-XL-048-096FF-NFR-SLC-15.875	48	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	77.59	83.6	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>3.055</i>	<i>3.291</i>	<i>0.609</i>	
# P-XL-049-095SF-PFR-NIL-08.000	49	9.5	8.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	79.20	69.0	20.60	22.00
		<i>0.374</i>	<i>0.315</i>				<i>3.118</i>	<i>2.717</i>	<i>0.811</i>	<i>0.866</i>
# P-XL-050-096P-ALA-SET-07.938	50	9.5	7.938	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	80.82		25.40	38.10
		<i>0.374</i>	<i>0.313</i>				<i>3.182</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-050-096P-ALA-SET-09.525	50	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	80.82		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>3.182</i>		<i>1.000</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-050-096P-ALA-SET-12.700	50	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	80.82		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>3.182</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-058-096SF-PFR-AIS-07.938	58	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	93.75	99.6	20.64	25.40
		<i>0.374</i>	<i>0.313</i>				<i>3.691</i>	<i>3.921</i>	<i>0.813</i>	<i>1.000</i>
# P-XL-058-095SF-PFR-AIS-08.000	58	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	93.75	100.0	20.60	25.00
		<i>0.374</i>	<i>0.315</i>				<i>3.691</i>	<i>3.937</i>	<i>0.811</i>	<i>0.984</i>
# P-XL-058-096SF-PFR-ALS-09.525	58	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	SF_G_MW (Single Flange)	93.75	99.6	20.64	26.19
		<i>0.374</i>	<i>0.375</i>				<i>3.691</i>	<i>3.921</i>	<i>0.813</i>	<i>1.031</i>
# P-XL-058-096SF-POL-SET-09.525	58	9.5	9.525	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	93.75	99.6	20.64	25.40
		<i>0.374</i>	<i>0.375</i>				<i>3.691</i>	<i>3.921</i>	<i>0.813</i>	<i>1.000</i>
# P-XL-058-096SF-PFR-FLC-09.525	58	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	93.75	99.6	20.64	26.19
		<i>0.374</i>	<i>0.375</i>				<i>3.691</i>	<i>3.921</i>	<i>0.813</i>	<i>1.031</i>
# P-XL-058-096SF-PFR-AIS-09.525	58	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	93.75	99.6	20.64	25.40
		<i>0.374</i>	<i>0.375</i>				<i>3.691</i>	<i>3.921</i>	<i>0.813</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-058-096SF-PFR-SET-09.525	58	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	93.75	99.6	20.64	25.40
		<i>0.374</i>	<i>0.375</i>				<i>3.691</i>	<i>3.921</i>	<i>0.813</i>	<i>1.000</i>
# P-XL-058-095SF-PFR-NIL-10.000	58	9.5	10.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	93.75	100.0	20.60	25.00
		<i>0.374</i>	<i>0.394</i>				<i>3.691</i>	<i>3.937</i>	<i>0.811</i>	<i>0.984</i>
# P-XL-058-095SF-PFR-FLC-10.000	58	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	93.75	100.0	20.60	26.00
		<i>0.374</i>	<i>0.394</i>				<i>3.691</i>	<i>3.937</i>	<i>0.811</i>	<i>1.024</i>
# P-XL-058-095SF-PFR-ALS-10.000	58	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	93.75	100.0	20.60	26.00
		<i>0.374</i>	<i>0.394</i>				<i>3.691</i>	<i>3.937</i>	<i>0.811</i>	<i>1.024</i>
# P-XL-058-095SF-PFR-AIS-10.000	58	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	93.75	100.0	20.60	25.00
		<i>0.374</i>	<i>0.394</i>				<i>3.691</i>	<i>3.937</i>	<i>0.811</i>	<i>0.984</i>
# P-XL-058-095SF-PFR-AIS-12.000	58	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	93.75	100.0	20.60	25.00
		<i>0.374</i>	<i>0.472</i>				<i>3.691</i>	<i>3.937</i>	<i>0.811</i>	<i>0.984</i>
# P-XL-058-096SF-PFR-AIS-12.700	58	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	93.75	99.6	20.64	25.40
		<i>0.374</i>	<i>0.500</i>				<i>3.691</i>	<i>3.921</i>	<i>0.813</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-060-096P-PFR-AIS-07.938	60	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	P_GI_HW (Unflanged)	96.98	-	22.23	25.40
		<i>0.374</i>	<i>0.313</i>				<i>3.818</i>		<i>0.875</i>	<i>1.000</i>
P-XL-060-095P-PFR-AIS-08.000	60	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	P_GI_HW (Unflanged)	96.98		22.20	25.00
		<i>0.374</i>	<i>0.315</i>				<i>3.818</i>		<i>0.874</i>	<i>0.984</i>
# P-XL-060-096P-PFR-FLC-09.525	60	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	P_FL_HW (Unflanged)	96.98	-	22.23	26.19
		<i>0.374</i>	<i>0.375</i>				<i>3.818</i>		<i>0.875</i>	<i>1.031</i>
# P-XL-060-096P-ALU-SET-09.525	60	9.5	9.525	Aluminium	Set Screw	P_G_H (Unflanged)	96.98		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>3.818</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-060-096P-PFR-SET-09.525	60	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	P_G_HW (Unflanged)	96.98	-	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>3.818</i>		<i>0.875</i>	<i>1.000</i>
# P-XL-060-096P-PFR-ALS-09.525	60	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	P_G_MW (Unflanged)	96.98	-	22.23	26.19
		<i>0.374</i>	<i>0.375</i>				<i>3.818</i>		<i>0.875</i>	<i>1.031</i>
# P-XL-060-096P-PFR-AIS-09.525	60	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	P_GI_HW (Unflanged)	96.98	-	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>3.818</i>		<i>0.875</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-060-096P-POL-SET-09.525	60	9.5	9.525	Polycarbonate	Set Screw	P_G_HW (Unflanged)	96.98	-	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>3.818</i>		<i>0.875</i>	<i>1.000</i>
# P-XL-060-096P-ALA-SET-09.525	60	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	96.98		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>3.818</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-060-096SF-NFR-SET-09.538	60	9.5	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	96.98	101.9	22.62	31.75
		<i>0.374</i>	<i>0.376</i>				<i>3.818</i>	<i>4.012</i>	<i>0.891</i>	<i>1.250</i>
# P-XL-060-096P-NFR-SET-09.538	60	9.5	9.538	Nylon, Fibreglass Reinforced	Set Screw	P_G_HW (Unflanged)	96.98		22.62	31.75
		<i>0.374</i>	<i>0.376</i>				<i>3.818</i>		<i>0.891</i>	<i>1.250</i>
P-XL-060-095P-PFR-NIL-10.000	60	9.5	10.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	P_NL_HW (Unflanged)	96.98		22.20	25.00
		<i>0.374</i>	<i>0.394</i>				<i>3.818</i>		<i>0.874</i>	<i>0.984</i>
P-XL-060-095P-PFR-FLC-10.000	60	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	96.98		22.20	26.00
		<i>0.374</i>	<i>0.394</i>				<i>3.818</i>		<i>0.874</i>	<i>1.024</i>
P-XL-060-095P-PFR-ALS-10.000	60	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	96.98		22.20	26.00
		<i>0.374</i>	<i>0.394</i>				<i>3.818</i>		<i>0.874</i>	<i>1.024</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-060-095P-PFR-AIS-10.000	60	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	P_GI_HW (Unflanged)	96.98		22.20	25.00
		<i>0.374</i>	<i>0.394</i>				<i>3.818</i>		<i>0.874</i>	<i>0.984</i>
# P-XL-060-095P-ALU-SET-12.000	60	9.5	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	96.98		25.40	38.00
		<i>0.374</i>	<i>0.472</i>				<i>3.818</i>		<i>1.000</i>	<i>1.496</i>
# P-XL-060-095P-PFR-AIS-12.000	60	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	P_GI_HW (Unflanged)	96.98		22.20	25.00
		<i>0.374</i>	<i>0.472</i>				<i>3.818</i>		<i>0.874</i>	<i>0.984</i>
# P-XL-060-096P-PFR-AIS-12.700	60	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	P_GI_HW (Unflanged)	96.98	-	22.23	25.40
		<i>0.374</i>	<i>0.500</i>				<i>3.818</i>		<i>0.875</i>	<i>1.000</i>
P-XL-060-096P-ALA-SET-12.700	60	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	96.98		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>3.818</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-060-096FF-NFR-SLC-15.875	60	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	96.98	102.9	15.48	
		<i>0.374</i>	<i>0.625</i>				<i>3.818</i>	<i>4.051</i>	<i>0.609</i>	
# P-XL-060-096SF-NFR-SLC-15.875	60	9.5	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	96.98	102.9	14.73	
		<i>0.374</i>	<i>0.625</i>				<i>3.818</i>	<i>4.051</i>	<i>0.580</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-072-096P-PFR-AIS-07.938	72	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	P_GI_HW (Unflanged)	116.38	-	22.23	25.40
		<i>0.374</i>	<i>0.313</i>				<i>4.582</i>		<i>0.875</i>	<i>1.000</i>
P-XL-072-095P-PFR-AIS-08.000	72	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	P_GI_HW (Unflanged)	116.38		22.20	25.00
		<i>0.374</i>	<i>0.315</i>				<i>4.582</i>		<i>0.874</i>	<i>0.984</i>
# P-XL-072-096P-ALA-SET-09.525	72	9.5	9.525	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	116.38		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>4.582</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-072-096P-ALU-SET-09.525	72	9.5	9.525	Aluminium	Set Screw	P_G_H (Unflanged)	116.38		25.40	38.10
		<i>0.374</i>	<i>0.375</i>				<i>4.582</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-072-096P-POL-SET-09.525	72	9.5	9.525	Polycarbonate	Set Screw	P_G_HW (Unflanged)	116.38	-	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>4.582</i>		<i>0.875</i>	<i>1.000</i>
# P-XL-072-096P-PFR-SET-09.525	72	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	P_G_HW (Unflanged)	116.38	-	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>4.582</i>		<i>0.875</i>	<i>1.000</i>
# P-XL-072-096P-PFR-FLC-09.525	72	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	P_FL_HW (Unflanged)	116.38	-	22.23	26.19
		<i>0.374</i>	<i>0.375</i>				<i>4.582</i>		<i>0.875</i>	<i>1.031</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-072-096P-PFR-ALS-09.525	72	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Overmoulded Hub	P_G_MW (Unflanged)	116.38	-	22.23	26.19
		<i>0.374</i>	<i>0.375</i>				<i>4.582</i>		<i>0.875</i>	<i>1.031</i>
# P-XL-072-096P-PFR-AIS-09.525	72	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	P_GI_HW (Unflanged)	116.38	-	22.23	25.40
		<i>0.374</i>	<i>0.375</i>				<i>4.582</i>		<i>0.875</i>	<i>1.000</i>
# P-XL-072-095P-PFR-FLC-10.000	72	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Fairloc Hub - tm-	SF_FL_HW (Single Flange)	116.38		22.20	26.00
		<i>0.374</i>	<i>0.394</i>				<i>4.582</i>		<i>0.874</i>	<i>1.024</i>
# P-XL-072-095P-PFR-ALS-10.000	72	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Hub	SF_G_MW (Single Flange)	116.38		22.20	26.00
		<i>0.374</i>	<i>0.394</i>				<i>4.582</i>		<i>0.874</i>	<i>1.024</i>
# P-XL-072-095P-PFR-AIS-10.000	72	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	P_GI_HW (Unflanged)	116.38		22.20	25.00
		<i>0.374</i>	<i>0.394</i>				<i>4.582</i>		<i>0.874</i>	<i>0.984</i>
P-XL-072-095P-PFR-NIL-10.000	72	9.5	10.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	P_NL_HW (Unflanged)	116.38		22.20	25.00
		<i>0.374</i>	<i>0.394</i>				<i>4.582</i>		<i>0.874</i>	<i>0.984</i>
# P-XL-072-095P-PFR-AIS-12.000	72	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	P_GI_HW (Unflanged)	116.38		22.20	25.00
		<i>0.374</i>	<i>0.472</i>				<i>4.582</i>		<i>0.874</i>	<i>0.984</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-072-095P-ALU-SET-12.000	72	9.5	12.000	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	116.38		25.40	38.00
		<i>0.374</i>	<i>0.472</i>				<i>4.582</i>		<i>1.000</i>	<i>1.496</i>
# P-XL-072-096P-PFR-AIS-12.700	72	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	P_GI_HW (Unflanged)	116.38	-	22.23	25.40
		<i>0.374</i>	<i>0.500</i>				<i>4.582</i>		<i>0.875</i>	<i>1.000</i>
# P-XL-072-096P-ALA-SET-12.700	72	9.5	12.700	Aluminium, Clear Anodised	Set Screw	P_G_HW (Unflanged)	116.38		25.40	38.10
		<i>0.374</i>	<i>0.500</i>				<i>4.582</i>		<i>1.000</i>	<i>1.500</i>
# P-XL-078-096SF-PFR-AIS-07.938	78	9.5	7.938	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	126.08	131.8	24.61	25.40
		<i>0.374</i>	<i>0.313</i>				<i>4.964</i>	<i>5.189</i>	<i>0.969</i>	<i>1.000</i>
# P-XL-078-095SF-PFR-AIS-08.000	78	9.5	8.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	126.08	132.0	24.60	25.00
		<i>0.374</i>	<i>0.315</i>				<i>4.964</i>	<i>5.197</i>	<i>0.969</i>	<i>0.984</i>
P-XL-078-096SF-POL-SET-09.525	78	9.5	9.525	Polycarbonate	Set Screw	SF_G_MW (Single Flange)	126.08	131.8	24.61	25.40
		<i>0.374</i>	<i>0.375</i>				<i>4.964</i>	<i>5.189</i>	<i>0.969</i>	<i>1.000</i>
# P-XL-078-096SF-PFR-SET-09.525	78	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_G_MW (Single Flange)	126.08	131.8	24.61	25.40
		<i>0.374</i>	<i>0.375</i>				<i>4.964</i>	<i>5.189</i>	<i>0.969</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 5.080mm Pitch - XL

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-XL-078-096SF-PFR-AIS-09.525	78	9.5	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	126.08	131.8	24.61	25.40
		<i>0.374</i>	<i>0.375</i>				<i>4.964</i>	<i>5.189</i>	<i>0.969</i>	<i>1.000</i>
# P-XL-078-095SF-PFR-NIL-10.000	78	9.5	10.000	Polycarbonate, Fibreglass Reinforced	No Locking Device	SF_NL_2HW (Single Flange)	126.08	132.0	24.60	25.00
		<i>0.374</i>	<i>0.394</i>				<i>4.964</i>	<i>5.197</i>	<i>0.969</i>	<i>0.984</i>
# P-XL-078-095SF-PFR-AIS-10.000	78	9.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	126.08	132.0	24.60	25.00
		<i>0.374</i>	<i>0.394</i>				<i>4.964</i>	<i>5.197</i>	<i>0.969</i>	<i>0.984</i>
# P-XL-078-095SF-PFR-AIS-12.000	78	9.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_HW (Single Flange)	126.08	132.0	24.60	25.00
		<i>0.374</i>	<i>0.472</i>				<i>4.964</i>	<i>5.197</i>	<i>0.969</i>	<i>0.984</i>
# P-XL-078-096SF-PFR-AIS-12.700	78	9.5	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	126.08	131.8	24.61	25.40
		<i>0.374</i>	<i>0.500</i>				<i>4.964</i>	<i>5.189</i>	<i>0.969</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au

