




MBA

Pulleys - Timing - 9.525mm Pitch - L

Timing Pulleys to suit L Series 9.525mm Pitch Timing Belts.

Various materials as shown.

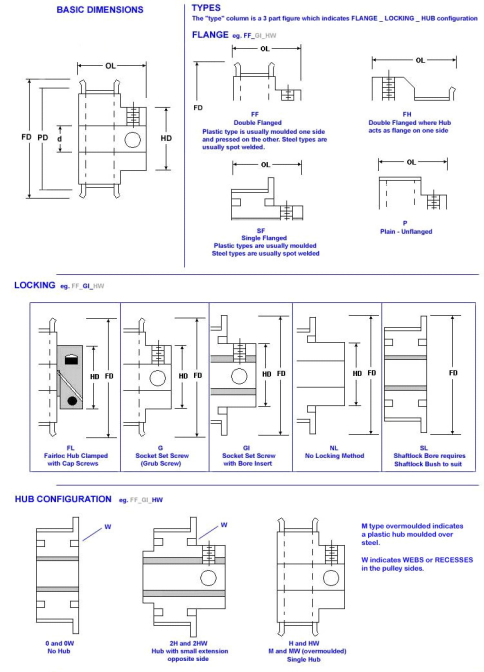

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-010-125FF-PFR-AIS-10.000	10	12.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	30.31	36.6	30.70	22.20
		0.492	0.394				1.193	1.441	1.209	0.874
# P-L9-010-125SF-PFR-AIS-10.000	10	12.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	30.31	36.6	30.70	22.20
		0.492	0.394				1.193	1.441	1.209	0.874

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-L9-010-125FF-ALA-SET-10.000	10	12.5	10.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.31	36.5	28.60	22.20
		<i>0.492</i>	<i>0.394</i>				<i>1.193</i>	<i>1.437</i>	<i>1.126</i>	<i>0.874</i>
# P-L9-010-125FF-PFR-AIS-12.000	10	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	30.31	36.6	30.70	22.20
		<i>0.492</i>	<i>0.472</i>				<i>1.193</i>	<i>1.441</i>	<i>1.209</i>	<i>0.874</i>
# P-L9-010-125SF-PFR-AIS-12.000	10	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	30.31	36.6	30.70	22.20
		<i>0.492</i>	<i>0.472</i>				<i>1.193</i>	<i>1.441</i>	<i>1.209</i>	<i>0.874</i>
# P-L9-010-127FF-NFR-AIS-06.363	10	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.31	37.8	26.59	22.23
		<i>0.500</i>	<i>0.251</i>				<i>1.193</i>	<i>1.488</i>	<i>1.047</i>	<i>0.875</i>
# P-L9-010-127SF-NFR-AIS-06.363	10	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	30.31	37.8	25.40	22.23
		<i>0.500</i>	<i>0.251</i>				<i>1.193</i>	<i>1.488</i>	<i>1.000</i>	<i>0.875</i>
# P-L9-010-127SF-PFR-AIS-09.525	10	12.7	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	30.31	36.6	30.73	22.23
		<i>0.500</i>	<i>0.375</i>				<i>1.193</i>	<i>1.441</i>	<i>1.210</i>	<i>0.875</i>
# P-L9-010-127FF-ALA-SET-09.525	10	12.7	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.31	36.5	28.58	22.23
		<i>0.500</i>	<i>0.375</i>				<i>1.193</i>	<i>1.437</i>	<i>1.125</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-010-127FF-PFR-AIS-09.525	10	12.7	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.31	36.6	30.73	22.23
		<i>0.500</i>	<i>0.375</i>				<i>1.193</i>	<i>1.441</i>	<i>1.210</i>	<i>0.875</i>
# P-L9-010-127FF-STL-SET-09.525	10	12.7	9.525	Steel	Set Screw	FF_G_H (Double Flange)	30.31	36.5	28.58	20.64
		<i>0.500</i>	<i>0.375</i>				<i>1.193</i>	<i>1.437</i>	<i>1.125</i>	<i>0.813</i>
# P-L9-010-127FF-STL-SET-09.525A	10	12.7	9.525	Steel	Set Screw	FF_G_H (Double Flange)	30.31	36.5	31.75	20.64
		<i>0.500</i>	<i>0.375</i>				<i>1.193</i>	<i>1.437</i>	<i>1.250</i>	<i>0.813</i>
# P-L9-010-127SF-PFR-AIS-12.700	10	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	30.31	36.6	30.73	22.23
		<i>0.500</i>	<i>0.500</i>				<i>1.193</i>	<i>1.441</i>	<i>1.210</i>	<i>0.875</i>
P-L9-010-127FF-ALA-SET-12.700	10	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	30.31	36.5	28.58	22.23
		<i>0.500</i>	<i>0.500</i>				<i>1.193</i>	<i>1.437</i>	<i>1.125</i>	<i>0.875</i>
# P-L9-010-127FF-PFR-AIS-12.700	10	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.31	36.6	30.73	22.23
		<i>0.500</i>	<i>0.500</i>				<i>1.193</i>	<i>1.441</i>	<i>1.210</i>	<i>0.875</i>
# P-L9-010-127FF-NFR-SLC-15.875	10	12.7	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	30.31	37.8	19.05	
		<i>0.500</i>	<i>0.625</i>				<i>1.193</i>	<i>1.488</i>	<i>0.750</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-010-127SF-NFR-SLC-15.875	10	12.7	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	30.31	37.8	17.78	
		<i>0.500</i>	<i>0.625</i>				<i>1.193</i>	<i>1.488</i>	<i>0.700</i>	
# P-L9-010-190FF-PFR-AIS-10.000	10	19.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	30.31	36.6	37.10	22.20
		<i>0.748</i>	<i>0.394</i>				<i>1.193</i>	<i>1.441</i>	<i>1.461</i>	<i>0.874</i>
# P-L9-010-190SF-PFR-AIS-10.000	10	19.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	30.31	36.6	37.10	22.20
		<i>0.748</i>	<i>0.394</i>				<i>1.193</i>	<i>1.441</i>	<i>1.461</i>	<i>0.874</i>
# P-L9-010-190FF-PFR-AIS-12.000	10	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	30.31	36.6	37.10	22.20
		<i>0.748</i>	<i>0.472</i>				<i>1.193</i>	<i>1.441</i>	<i>1.461</i>	<i>0.874</i>
# P-L9-010-190SF-PFR-AIS-12.000	10	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	30.31	36.6	37.10	22.20
		<i>0.748</i>	<i>0.472</i>				<i>1.193</i>	<i>1.441</i>	<i>1.461</i>	<i>0.874</i>
# P-L9-010-191FF-NFR-AIS-09.525	10	19.1	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.31	36.6	37.08	22.23
		<i>0.752</i>	<i>0.375</i>				<i>1.193</i>	<i>1.441</i>	<i>1.460</i>	<i>0.875</i>
# P-L9-010-191SF-NFR-AIS-09.525	10	19.1	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	30.31	36.6	37.08	22.23
		<i>0.752</i>	<i>0.375</i>				<i>1.193</i>	<i>1.441</i>	<i>1.460</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-010-191SF-NFR-AIS-12.700	10	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	30.31	36.6	37.08	22.23
		<i>0.752</i>	<i>0.500</i>				<i>1.193</i>	<i>1.441</i>	<i>1.460</i>	<i>0.875</i>
# P-L9-010-191FF-NFR-AIS-12.700	10	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	30.31	36.6	37.08	22.23
		<i>0.752</i>	<i>0.500</i>				<i>1.193</i>	<i>1.441</i>	<i>1.460</i>	<i>0.875</i>
# P-L9-011-125FF-ALA-SET-10.000	11	12.5	10.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	33.34	38.9	28.60	25.40
		<i>0.492</i>	<i>0.394</i>				<i>1.313</i>	<i>1.531</i>	<i>1.126</i>	<i>1.000</i>
# P-L9-011-127FF-NFR-AIS-06.363	11	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	33.34	41.4	26.59	22.23
		<i>0.500</i>	<i>0.251</i>				<i>1.313</i>	<i>1.630</i>	<i>1.047</i>	<i>0.875</i>
# P-L9-011-127SF-NFR-AIS-06.363	11	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	33.34	41.4	25.40	22.23
		<i>0.500</i>	<i>0.251</i>				<i>1.313</i>	<i>1.630</i>	<i>1.000</i>	<i>0.875</i>
# P-L9-011-127FF-ALA-SET-09.525	11	12.7	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	33.34	38.9	28.58	25.40
		<i>0.500</i>	<i>0.375</i>				<i>1.313</i>	<i>1.531</i>	<i>1.125</i>	<i>1.000</i>
# P-L9-011-127FF-ALA-SET-12.700	11	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	33.34	38.9	28.58	25.40
		<i>0.500</i>	<i>0.500</i>				<i>1.313</i>	<i>1.531</i>	<i>1.125</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-011-127SF-NFR-SLC-15.875	11	12.7	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	33.34	41.4	17.78	
		<i>0.500</i>	<i>0.625</i>				<i>1.313</i>	<i>1.630</i>	<i>0.700</i>	
# P-L9-011-127FF-NFR-SLC-15.875	11	12.7	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	33.34	41.4	19.05	
		<i>0.500</i>	<i>0.625</i>				<i>1.313</i>	<i>1.630</i>	<i>0.750</i>	
# P-L9-012-125FF-PFR-AIS-10.000	12	12.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	36.37	42.9	30.70	22.20
		<i>0.492</i>	<i>0.394</i>				<i>1.432</i>	<i>1.689</i>	<i>1.209</i>	<i>0.874</i>
# P-L9-012-125SF-PFR-AIS-10.000	12	12.5	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	36.37	42.9	30.70	22.20
		<i>0.492</i>	<i>0.394</i>				<i>1.432</i>	<i>1.689</i>	<i>1.209</i>	<i>0.874</i>
# P-L9-012-125FF-ALA-SET-10.000	12	12.5	10.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	36.37	42.0	30.20	28.60
		<i>0.492</i>	<i>0.394</i>				<i>1.432</i>	<i>1.654</i>	<i>1.189</i>	<i>1.126</i>
# P-L9-012-125FF-PFR-AIS-12.000	12	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	36.37	42.9	30.70	22.20
		<i>0.492</i>	<i>0.472</i>				<i>1.432</i>	<i>1.689</i>	<i>1.209</i>	<i>0.874</i>
# P-L9-012-125SF-PFR-AIS-12.000	12	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	36.37	42.9	30.70	22.20
		<i>0.492</i>	<i>0.472</i>				<i>1.432</i>	<i>1.689</i>	<i>1.209</i>	<i>0.874</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-012-127SF-NFR-AIS-06.363	12	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	36.37	44.5	25.40	22.23
		<i>0.500</i>	<i>0.251</i>				<i>1.432</i>	<i>1.752</i>	<i>1.000</i>	<i>0.875</i>
# P-L9-012-127FF-NFR-AIS-06.363	12	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	36.37	44.5	26.59	22.23
		<i>0.500</i>	<i>0.251</i>				<i>1.432</i>	<i>1.752</i>	<i>1.047</i>	<i>0.875</i>
# P-L9-012-127FF-ALA-SET-09.525	12	12.7	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	36.37	42.1	30.16	28.58
		<i>0.500</i>	<i>0.375</i>				<i>1.432</i>	<i>1.657</i>	<i>1.187</i>	<i>1.125</i>
# P-L9-012-127SF-PFR-AIS-09.525	12	12.7	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	36.37	42.9	30.73	22.23
		<i>0.500</i>	<i>0.375</i>				<i>1.432</i>	<i>1.689</i>	<i>1.210</i>	<i>0.875</i>
# P-L9-012-127FF-PFR-AIS-09.525	12	12.7	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	36.37	42.9	30.73	22.23
		<i>0.500</i>	<i>0.375</i>				<i>1.432</i>	<i>1.689</i>	<i>1.210</i>	<i>0.875</i>
# P-L9-012-127FF-STL-SET-09.525	12	12.7	9.525	Steel	Set Screw	FF_G_H (Double Flange)	36.37	42.9	31.75	26.99
		<i>0.500</i>	<i>0.375</i>				<i>1.432</i>	<i>1.689</i>	<i>1.250</i>	<i>1.063</i>
# P-L9-012-127FF-STL-SET-09.525A	12	12.7	9.525	Steel	Set Screw	FF_G_H (Double Flange)	36.37	42.9	31.75	25.40
		<i>0.500</i>	<i>0.375</i>				<i>1.432</i>	<i>1.689</i>	<i>1.250</i>	<i>1.000</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-012-127SF-PFR-AIS-12.700	12	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	36.37	42.9	30.73	22.23
		<i>0.500</i>	<i>0.500</i>				<i>1.432</i>	<i>1.689</i>	<i>1.210</i>	<i>0.875</i>
# P-L9-012-127FF-STL-SET-12.700A	12	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	36.37	42.9	31.75	25.40
		<i>0.500</i>	<i>0.500</i>				<i>1.432</i>	<i>1.689</i>	<i>1.250</i>	<i>1.000</i>
# P-L9-012-127FF-PFR-AIS-12.700	12	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	36.37	42.9	30.73	22.23
		<i>0.500</i>	<i>0.500</i>				<i>1.432</i>	<i>1.689</i>	<i>1.210</i>	<i>0.875</i>
# P-L9-012-127FF-ALA-SET-12.700	12	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	36.37	42.1	30.16	28.58
		<i>0.500</i>	<i>0.500</i>				<i>1.432</i>	<i>1.657</i>	<i>1.187</i>	<i>1.125</i>
# P-L9-012-127FF-NFR-SLC-15.875	12	12.7	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	36.37	44.5	19.05	
		<i>0.500</i>	<i>0.625</i>				<i>1.432</i>	<i>1.752</i>	<i>0.750</i>	
# P-L9-012-127SF-NFR-SLC-15.875	12	12.7	15.875	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	36.37	44.5	17.78	
		<i>0.500</i>	<i>0.625</i>				<i>1.432</i>	<i>1.752</i>	<i>0.700</i>	
# P-L9-012-190FF-PFR-AIS-10.000	12	19.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	36.37	42.9	37.10	22.20
		<i>0.748</i>	<i>0.394</i>				<i>1.432</i>	<i>1.689</i>	<i>1.461</i>	<i>0.874</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-012-190SF-PFR-AIS-10.000	12	19.0	10.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	36.37	42.9	37.10	22.20
		<i>0.748</i>	<i>0.394</i>				<i>1.432</i>	<i>1.689</i>	<i>1.461</i>	<i>0.874</i>
# P-L9-012-190SF-PFR-AIS-12.000	12	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	36.37	42.9	37.10	22.20
		<i>0.748</i>	<i>0.472</i>				<i>1.432</i>	<i>1.689</i>	<i>1.461</i>	<i>0.874</i>
# P-L9-012-190FF-PFR-AIS-12.000	12	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	36.37	42.9	37.10	22.20
		<i>0.748</i>	<i>0.472</i>				<i>1.432</i>	<i>1.689</i>	<i>1.461</i>	<i>0.874</i>
# P-L9-012-191SF-NFR-AIS-09.525	12	19.1	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	36.37	42.9	37.08	22.23
		<i>0.752</i>	<i>0.375</i>				<i>1.432</i>	<i>1.689</i>	<i>1.460</i>	<i>0.875</i>
# P-L9-012-191FF-NFR-AIS-09.525	12	19.1	9.525	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	36.37	42.9	37.08	22.23
		<i>0.752</i>	<i>0.375</i>				<i>1.432</i>	<i>1.689</i>	<i>1.460</i>	<i>0.875</i>
# P-L9-012-191SF-NFR-AIS-12.700	12	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	36.37	42.9	37.08	22.23
		<i>0.752</i>	<i>0.500</i>				<i>1.432</i>	<i>1.689</i>	<i>1.460</i>	<i>0.875</i>
# P-L9-012-191FF-NFR-AIS-12.700	12	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	36.37	42.9	37.08	22.23
		<i>0.752</i>	<i>0.500</i>				<i>1.432</i>	<i>1.689</i>	<i>1.460</i>	<i>0.875</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-013-125FF-ALA-SET-10.000	13	12.5	10.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	39.40	45.2	30.20	28.60
		<i>0.492</i>	<i>0.394</i>				<i>1.551</i>	<i>1.780</i>	<i>1.189</i>	<i>1.126</i>
# P-L9-013-127SF-NFR-AIS-06.363	13	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	39.40	45.5	25.40	25.40
		<i>0.500</i>	<i>0.251</i>				<i>1.551</i>	<i>1.791</i>	<i>1.000</i>	<i>1.000</i>
# P-L9-013-127FF-NFR-AIS-06.363	13	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	39.40	45.5	26.59	25.40
		<i>0.500</i>	<i>0.251</i>				<i>1.551</i>	<i>1.791</i>	<i>1.047</i>	<i>1.000</i>
# P-L9-013-127FF-STL-SET-09.525A	13	12.7	9.525	Steel	Set Screw	FF_G_H (Double Flange)	39.40	46.0	31.75	28.58
		<i>0.500</i>	<i>0.375</i>				<i>1.551</i>	<i>1.811</i>	<i>1.250</i>	<i>1.125</i>
# P-L9-013-127FF-ALA-SET-09.525	13	12.7	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	39.40	45.2	30.16	28.58
		<i>0.500</i>	<i>0.375</i>				<i>1.551</i>	<i>1.780</i>	<i>1.187</i>	<i>1.125</i>
# P-L9-013-127FF-ALA-SET-12.700	13	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	39.40	45.2	30.16	28.58
		<i>0.500</i>	<i>0.500</i>				<i>1.551</i>	<i>1.780</i>	<i>1.187</i>	<i>1.125</i>
# P-L9-013-127FF-STL-SET-12.700A	13	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	39.40	46.0	31.75	28.58
		<i>0.500</i>	<i>0.500</i>				<i>1.551</i>	<i>1.811</i>	<i>1.250</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-013-127SF-NFR-SLC-19.050	13	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	39.40	45.5	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>1.551</i>	<i>1.791</i>	<i>0.700</i>	
# P-L9-013-127FF-NFR-SLC-19.050	13	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	39.40	45.5	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>1.551</i>	<i>1.791</i>	<i>0.750</i>	
# P-L9-014-125FF-ALA-SET-12.000	14	12.5	12.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.43	48.4	30.20	31.70
		<i>0.492</i>	<i>0.472</i>				<i>1.670</i>	<i>1.906</i>	<i>1.189</i>	<i>1.248</i>
# P-L9-014-127FF-NFR-AIS-06.363	14	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	42.43	50.8	26.59	31.75
		<i>0.500</i>	<i>0.251</i>				<i>1.670</i>	<i>2.000</i>	<i>1.047</i>	<i>1.250</i>
# P-L9-014-127SF-NFR-AIS-06.363	14	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	42.43	50.8	25.40	31.75
		<i>0.500</i>	<i>0.251</i>				<i>1.670</i>	<i>2.000</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-014-127FF-STL-SET-09.525A	14	12.7	9.525	Steel	Set Screw	FF_G_H (Double Flange)	42.43	49.2	31.75	28.58
		<i>0.500</i>	<i>0.375</i>				<i>1.670</i>	<i>1.937</i>	<i>1.250</i>	<i>1.125</i>
# P-L9-014-127FF-STL-SET-09.525	14	12.7	9.525	Steel	Set Screw	FF_G_H (Double Flange)	42.43	49.2	31.75	28.58
		<i>0.500</i>	<i>0.375</i>				<i>1.670</i>	<i>1.937</i>	<i>1.250</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-014-127FF-ALA-SET-09.525	14	12.7	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.43	48.4	30.16	31.75
		<i>0.500</i>	<i>0.375</i>				<i>1.670</i>	<i>1.906</i>	<i>1.187</i>	<i>1.250</i>
# P-L9-014-127FF-ALA-SET-12.700	14	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	42.43	48.4	30.16	31.75
		<i>0.500</i>	<i>0.500</i>				<i>1.670</i>	<i>1.906</i>	<i>1.187</i>	<i>1.250</i>
# P-L9-014-127FF-STL-SET-12.700A	14	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	42.43	49.2	31.75	28.58
		<i>0.500</i>	<i>0.500</i>				<i>1.670</i>	<i>1.937</i>	<i>1.250</i>	<i>1.125</i>
# P-L9-014-127SF-NFR-SLC-19.050	14	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	42.43	50.8	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>1.670</i>	<i>2.000</i>	<i>0.700</i>	
# P-L9-014-127FF-NFR-SLC-19.050	14	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	42.43	50.8	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>1.670</i>	<i>2.000</i>	<i>0.750</i>	
# P-L9-015-125FF-ALA-SET-12.000	15	12.5	12.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.46	51.6	31.80	35.00
		<i>0.492</i>	<i>0.472</i>				<i>1.790</i>	<i>2.031</i>	<i>1.252</i>	<i>1.378</i>
# P-L9-015-127SF-NFR-AIS-06.363	15	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	45.46	53.8	25.40	31.75
		<i>0.500</i>	<i>0.251</i>				<i>1.790</i>	<i>2.118</i>	<i>1.000</i>	<i>1.250</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-015-127FF-NFR-AIS-06.363	15	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	45.46	53.8	26.59	31.75
		<i>0.500</i>	<i>0.251</i>				<i>1.790</i>	<i>2.118</i>	<i>1.047</i>	<i>1.250</i>
# P-L9-015-127FF-ALA-SET-09.525	15	12.7	9.525	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.46	51.6	31.75	34.93
		<i>0.500</i>	<i>0.375</i>				<i>1.790</i>	<i>2.031</i>	<i>1.250</i>	<i>1.375</i>
# P-L9-015-127FF-STL-SET-12.700A	15	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	45.46	52.4	31.75	34.13
		<i>0.500</i>	<i>0.500</i>				<i>1.790</i>	<i>2.063</i>	<i>1.250</i>	<i>1.344</i>
# P-L9-015-127FF-ALA-SET-12.700	15	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	45.46	51.6	31.75	34.93
		<i>0.500</i>	<i>0.500</i>				<i>1.790</i>	<i>2.031</i>	<i>1.250</i>	<i>1.375</i>
# P-L9-015-127FF-NFR-SLC-19.050	15	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	45.46	53.8	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>1.790</i>	<i>2.118</i>	<i>0.750</i>	
# P-L9-015-127SF-NFR-SLC-19.050	15	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	45.46	53.8	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>1.790</i>	<i>2.118</i>	<i>0.700</i>	
# P-L9-016-125FF-PFR-AIS-12.000	16	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	48.49	53.8	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>1.909</i>	<i>2.118</i>	<i>1.209</i>	<i>1.126</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-016-125SF-PFR-AIS-12.000	16	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	48.49	53.8	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>1.909</i>	<i>2.118</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-016-125FF-ALA-SET-14.000	16	12.5	14.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	53.9	31.80	35.00
		<i>0.492</i>	<i>0.551</i>				<i>1.909</i>	<i>2.122</i>	<i>1.252</i>	<i>1.378</i>
# P-L9-016-125FF-PFR-AIS-16.000	16	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	48.49	53.8	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>1.909</i>	<i>2.118</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-016-125SF-PFR-AIS-16.000	16	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	48.49	53.8	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>1.909</i>	<i>2.118</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-016-127SF-NFR-AIS-06.363	16	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	48.49	56.4	25.40	31.75
		<i>0.500</i>	<i>0.251</i>				<i>1.909</i>	<i>2.220</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-016-127FF-NFR-AIS-06.363	16	12.7	6.363	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	48.49	56.4	26.59	31.75
		<i>0.500</i>	<i>0.251</i>				<i>1.909</i>	<i>2.220</i>	<i>1.047</i>	<i>1.250</i>
# P-L9-016-127FF-PFR-AIS-12.700	16	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	48.49	53.8	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>1.909</i>	<i>2.118</i>	<i>1.210</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-016-127FF-STL-SET-12.700A	16	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	48.49	55.6	31.75	36.51
		<i>0.500</i>	<i>0.500</i>				<i>1.909</i>	<i>2.189</i>	<i>1.250</i>	<i>1.437</i>
# P-L9-016-127SF-PFR-AIS-12.700	16	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	48.49	53.8	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>1.909</i>	<i>2.118</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-016-127FF-ALA-SET-12.700	16	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	31.75	34.93
		<i>0.500</i>	<i>0.500</i>				<i>1.909</i>	<i>2.126</i>	<i>1.250</i>	<i>1.375</i>
# P-L9-016-127FF-STL-SET-12.700	16	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	48.49	55.6	34.93	36.51
		<i>0.500</i>	<i>0.500</i>				<i>1.909</i>	<i>2.189</i>	<i>1.375</i>	<i>1.437</i>
# P-L9-016-127FF-ALA-SET-15.875	16	12.7	15.875	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	48.49	54.0	31.75	34.93
		<i>0.500</i>	<i>0.625</i>				<i>1.909</i>	<i>2.126</i>	<i>1.250</i>	<i>1.375</i>
# P-L9-016-127FF-PFR-AIS-15.875	16	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	48.49	53.8	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>1.909</i>	<i>2.118</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-016-127SF-PFR-AIS-15.875	16	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	48.49	53.8	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>1.909</i>	<i>2.118</i>	<i>1.210</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-016-127FF-NFR-SLC-19.050	16	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	48.49	56.4	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>1.909</i>	<i>2.220</i>	<i>0.750</i>	
# P-L9-016-127SF-NFR-SLC-19.050	16	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	48.49	56.4	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>1.909</i>	<i>2.220</i>	<i>0.700</i>	
# P-L9-016-190SF-PFR-AIS-12.000	16	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	48.49	53.8	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>1.909</i>	<i>2.118</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-016-190FF-PFR-AIS-12.000	16	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	48.49	53.8	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>1.909</i>	<i>2.118</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-016-190SF-PFR-AIS-16.000	16	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	48.49	53.8	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>1.909</i>	<i>2.118</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-016-190FF-PFR-AIS-16.000	16	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	48.49	53.8	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>1.909</i>	<i>2.118</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-016-191SF-NFR-AIS-12.700	16	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	48.49	53.8	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>1.909</i>	<i>2.118</i>	<i>1.460</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-016-191FF-NFR-AIS-12.700	16	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	48.49	53.8	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>1.909</i>	<i>2.118</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-016-191FF-NFR-AIS-15.875	16	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	48.49	53.8	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>1.909</i>	<i>2.118</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-016-191SF-NFR-AIS-15.875	16	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	48.49	53.8	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>1.909</i>	<i>2.118</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-017-125FF-ALA-SET-14.000	17	12.5	14.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	51.52	57.1	31.80	38.00
		<i>0.492</i>	<i>0.551</i>				<i>2.028</i>	<i>2.248</i>	<i>1.252</i>	<i>1.496</i>
# P-L9-017-127FF-NFR-AIS-07.950	17	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	51.52	59.4	26.59	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.028</i>	<i>2.339</i>	<i>1.047</i>	<i>1.250</i>
# P-L9-017-127SF-NFR-AIS-07.950	17	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	51.52	59.4	25.40	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.028</i>	<i>2.339</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-017-127FF-STL-SET-12.700	17	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	51.52	57.9	34.93	38.10
		<i>0.500</i>	<i>0.500</i>				<i>2.028</i>	<i>2.280</i>	<i>1.375</i>	<i>1.500</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-017-127FF-STL-SET-12.700A	17	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	51.52	58.7	31.75	36.51
		<i>0.500</i>	<i>0.500</i>				<i>2.028</i>	<i>2.311</i>	<i>1.250</i>	<i>1.437</i>
# P-L9-017-127FF-ALA-SET-12.700	17	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	51.52	57.2	31.75	38.10
		<i>0.500</i>	<i>0.500</i>				<i>2.028</i>	<i>2.252</i>	<i>1.250</i>	<i>1.500</i>
# P-L9-017-127FF-ALA-SET-15.875	17	12.7	15.875	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	51.52	57.2	31.75	38.10
		<i>0.500</i>	<i>0.625</i>				<i>2.028</i>	<i>2.252</i>	<i>1.250</i>	<i>1.500</i>
# P-L9-017-127FF-NFR-SLC-19.050	17	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	51.52	59.4	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>2.028</i>	<i>2.339</i>	<i>0.750</i>	
# P-L9-017-127SF-NFR-SLC-19.050	17	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	51.52	59.4	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>2.028</i>	<i>2.339</i>	<i>0.700</i>	
# P-L9-018-125FF-PFR-AIS-12.000	18	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	54.55	60.2	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>2.148</i>	<i>2.370</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-018-125SF-PFR-AIS-12.000	18	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	54.55	60.2	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>2.148</i>	<i>2.370</i>	<i>1.209</i>	<i>1.126</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-018-125FF-ALA-SET-14.000	18	12.5	14.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	54.55	60.3	31.80	41.30
		<i>0.492</i>	<i>0.551</i>				<i>2.148</i>	<i>2.374</i>	<i>1.252</i>	<i>1.626</i>
# P-L9-018-125FF-PFR-AIS-16.000	18	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	54.55	60.2	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>2.148</i>	<i>2.370</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-018-125SF-PFR-AIS-16.000	18	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	54.55	60.2	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>2.148</i>	<i>2.370</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-018-127SF-NFR-AIS-07.950	18	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	54.55	62.7	25.40	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.148</i>	<i>2.469</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-018-127FF-NFR-AIS-07.950	18	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	54.55	62.7	26.59	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.148</i>	<i>2.469</i>	<i>1.047</i>	<i>1.250</i>
# P-L9-018-127FF-ALA-SET-12.700	18	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	54.55	60.3	31.75	41.28
		<i>0.500</i>	<i>0.500</i>				<i>2.148</i>	<i>2.374</i>	<i>1.250</i>	<i>1.625</i>
# P-L9-018-127FF-STL-SET-12.700	18	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	54.55	60.3	34.93	39.69
		<i>0.500</i>	<i>0.500</i>				<i>2.148</i>	<i>2.374</i>	<i>1.375</i>	<i>1.563</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-018-127FF-PFR-AIS-12.700	18	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	54.55	60.2	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>2.148</i>	<i>2.370</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-018-127SF-PFR-AIS-12.700	18	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	54.55	60.2	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>2.148</i>	<i>2.370</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-018-127SF-PFR-AIS-15.875	18	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	54.55	60.2	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>2.148</i>	<i>2.370</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-018-127FF-ALA-SET-15.875	18	12.7	15.875	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	54.55	60.3	31.75	41.28
		<i>0.500</i>	<i>0.625</i>				<i>2.148</i>	<i>2.374</i>	<i>1.250</i>	<i>1.625</i>
# P-L9-018-127FF-PFR-AIS-15.875	18	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	54.55	60.2	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>2.148</i>	<i>2.370</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-018-127SF-NFR-SLC-19.050	18	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	54.55	62.7	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>2.148</i>	<i>2.469</i>	<i>0.700</i>	
# P-L9-018-127FF-NFR-SLC-19.050	18	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	54.55	62.7	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>2.148</i>	<i>2.469</i>	<i>0.750</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-018-190SF-PFR-AIS-12.000	18	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	54.55	60.2	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>2.148</i>	<i>2.370</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-018-190FF-PFR-AIS-12.000	18	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	54.55	60.2	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>2.148</i>	<i>2.370</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-018-190SF-PFR-AIS-16.000	18	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	54.55	60.2	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>2.148</i>	<i>2.370</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-018-190FF-PFR-AIS-16.000	18	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	54.55	60.2	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>2.148</i>	<i>2.370</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-018-191SF-NFR-AIS-12.700	18	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	54.55	60.2	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>2.148</i>	<i>2.370</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-018-191FF-NFR-AIS-12.700	18	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	54.55	60.2	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>2.148</i>	<i>2.370</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-018-191FF-NFR-AIS-15.875	18	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	54.55	60.2	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>2.148</i>	<i>2.370</i>	<i>1.460</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-018-191SF-NFR-AIS-15.875	18	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	54.55	60.2	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>2.148</i>	<i>2.370</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-019-125FF-ALA-SET-14.000	19	12.5	14.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	57.58	63.5	33.30	42.80
		<i>0.492</i>	<i>0.551</i>				<i>2.267</i>	<i>2.500</i>	<i>1.311</i>	<i>1.685</i>
# P-L9-019-127FF-NFR-AIS-07.950	19	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	57.58	65.3	26.59	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.267</i>	<i>2.571</i>	<i>1.047</i>	<i>1.250</i>
# P-L9-019-127SF-NFR-AIS-07.950	19	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	57.58	65.3	25.40	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.267</i>	<i>2.571</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-019-127FF-STL-SET-12.700	19	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	57.58	63.5	34.93	41.28
		<i>0.500</i>	<i>0.500</i>				<i>2.267</i>	<i>2.500</i>	<i>1.375</i>	<i>1.625</i>
# P-L9-019-127FF-ALA-SET-12.700	19	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	57.58	63.5	33.34	42.86
		<i>0.500</i>	<i>0.500</i>				<i>2.267</i>	<i>2.500</i>	<i>1.313</i>	<i>1.687</i>
# P-L9-019-127FF-ALA-SET-15.875	19	12.7	15.875	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	57.58	63.5	33.34	42.86
		<i>0.500</i>	<i>0.625</i>				<i>2.267</i>	<i>2.500</i>	<i>1.313</i>	<i>1.687</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-019-127FF-NFR-SLC-19.050	19	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	57.58	65.3	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>2.267</i>	<i>2.571</i>	<i>0.750</i>	
# P-L9-019-127SF-NFR-SLC-19.050	19	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	57.58	65.3	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>2.267</i>	<i>2.571</i>	<i>0.700</i>	
# P-L9-020-125FF-PFR-AIS-12.000	20	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	60.61	66.5	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>2.386</i>	<i>2.618</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-020-125SF-PFR-AIS-12.000	20	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	60.61	66.5	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>2.386</i>	<i>2.618</i>	<i>1.209</i>	<i>1.126</i>
P-L9-020-125FF-ALA-SET-14.000	20	12.5	14.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	60.61	66.6	33.30	46.00
		<i>0.492</i>	<i>0.551</i>				<i>2.386</i>	<i>2.622</i>	<i>1.311</i>	<i>1.811</i>
# P-L9-020-125FF-PFR-AIS-16.000	20	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	60.61	66.5	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>2.386</i>	<i>2.618</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-020-125SF-PFR-AIS-16.000	20	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	60.61	66.5	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>2.386</i>	<i>2.618</i>	<i>1.209</i>	<i>1.126</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-020-127SF-NFR-AIS-07.950	20	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	60.61	69.6	25.40	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.386</i>	<i>2.740</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-020-127FF-NFR-AIS-07.950	20	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	60.61	69.6	26.59	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.386</i>	<i>2.740</i>	<i>1.047</i>	<i>1.250</i>
# P-L9-020-127FF-STL-SET-12.700	20	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	60.61	66.7	34.93	42.86
		<i>0.500</i>	<i>0.500</i>				<i>2.386</i>	<i>2.626</i>	<i>1.375</i>	<i>1.687</i>
# P-L9-020-127SF-PFR-AIS-12.700	20	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	60.61	66.5	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>2.386</i>	<i>2.618</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-020-127FF-PFR-AIS-12.700	20	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	60.61	66.5	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>2.386</i>	<i>2.618</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-020-127FF-ALA-SET-12.700	20	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	60.61	66.7	33.34	46.04
		<i>0.500</i>	<i>0.500</i>				<i>2.386</i>	<i>2.626</i>	<i>1.313</i>	<i>1.813</i>
# P-L9-020-127FF-ALA-SET-15.875	20	12.7	15.875	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	60.61	66.7	33.34	46.04
		<i>0.500</i>	<i>0.625</i>				<i>2.386</i>	<i>2.626</i>	<i>1.313</i>	<i>1.813</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-020-127SF-PFR-AIS-15.875	20	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	60.61	66.5	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>2.386</i>	<i>2.618</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-020-127FF-PFR-AIS-15.875	20	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	60.61	66.5	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>2.386</i>	<i>2.618</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-020-127FF-NFR-SLC-19.050	20	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	60.61	69.6	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>2.386</i>	<i>2.740</i>	<i>0.750</i>	
# P-L9-020-127SF-NFR-SLC-19.050	20	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	60.61	69.6	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>2.386</i>	<i>2.740</i>	<i>0.700</i>	
# P-L9-020-190SF-PFR-AIS-12.000	20	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	60.61	66.5	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>2.386</i>	<i>2.618</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-020-190FF-PFR-AIS-12.000	20	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	60.61	66.5	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>2.386</i>	<i>2.618</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-020-190SF-PFR-AIS-16.000	20	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	60.61	66.5	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>2.386</i>	<i>2.618</i>	<i>1.461</i>	<i>1.126</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-020-190FF-PFR-AIS-16.000	20	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	60.61	66.5	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>2.386</i>	<i>2.618</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-020-191SF-NFR-AIS-12.700	20	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	60.61	66.5	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>2.386</i>	<i>2.618</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-020-191FF-NFR-AIS-12.700	20	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	60.61	66.5	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>2.386</i>	<i>2.618</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-020-191FF-NFR-AIS-15.875	20	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	60.61	66.5	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>2.386</i>	<i>2.618</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-020-191SF-NFR-AIS-15.875	20	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	60.61	66.5	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>2.386</i>	<i>2.618</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-021-125FF-ALA-SET-14.000	21	12.5	14.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	63.64	69.8	34.90	50.80
		<i>0.492</i>	<i>0.551</i>				<i>2.506</i>	<i>2.748</i>	<i>1.374</i>	<i>2.000</i>
# P-L9-021-127FF-NFR-AIS-07.950	21	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	63.64	72.4	26.59	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.506</i>	<i>2.850</i>	<i>1.047</i>	<i>1.250</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-021-127SF-NFR-AIS-07.950	21	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	63.64	72.4	25.40	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.506</i>	<i>2.850</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-021-127FF-STL-SET-12.700	21	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	63.64	69.5	36.51	47.63
		<i>0.500</i>	<i>0.500</i>				<i>2.506</i>	<i>2.736</i>	<i>1.437</i>	<i>1.875</i>
# P-L9-021-127FF-ALA-SET-12.700	21	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	63.64	69.9	34.93	50.80
		<i>0.500</i>	<i>0.500</i>				<i>2.506</i>	<i>2.752</i>	<i>1.375</i>	<i>2.000</i>
# P-L9-021-127FF-ALA-SET-15.875	21	12.7	15.875	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	63.64	69.9	34.93	50.80
		<i>0.500</i>	<i>0.625</i>				<i>2.506</i>	<i>2.752</i>	<i>1.375</i>	<i>2.000</i>
# P-L9-021-127FF-NFR-SLC-19.050	21	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	63.64	72.4	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>2.506</i>	<i>2.850</i>	<i>0.750</i>	
# P-L9-021-127SF-NFR-SLC-19.050	21	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	63.64	72.4	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>2.506</i>	<i>2.850</i>	<i>0.700</i>	
# P-L9-022-125FF-ALA-SET-14.000	22	12.5	14.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	66.68	73.0	34.90	54.00
		<i>0.492</i>	<i>0.551</i>				<i>2.625</i>	<i>2.874</i>	<i>1.374</i>	<i>2.126</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-022-127FF-NFR-AIS-07.950	22	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	66.68	74.9	26.59	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.625</i>	<i>2.949</i>	<i>1.047</i>	<i>1.250</i>
# P-L9-022-127SF-NFR-AIS-07.950	22	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	66.68	74.9	25.40	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.625</i>	<i>2.949</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-022-127FF-ALA-SET-12.700	22	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	66.68	73.0	34.93	53.98
		<i>0.500</i>	<i>0.500</i>				<i>2.625</i>	<i>2.874</i>	<i>1.375</i>	<i>2.125</i>
# P-L9-022-127FF-STL-SET-12.700	22	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	66.68	73.0	38.10	50.80
		<i>0.500</i>	<i>0.500</i>				<i>2.625</i>	<i>2.874</i>	<i>1.500</i>	<i>2.000</i>
# P-L9-022-127FF-ALA-SET-15.875	22	12.7	15.875	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	66.68	73.0	34.93	53.98
		<i>0.500</i>	<i>0.625</i>				<i>2.625</i>	<i>2.874</i>	<i>1.375</i>	<i>2.125</i>
# P-L9-022-127FF-NFR-SLC-19.050	22	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	66.68	74.9	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>2.625</i>	<i>2.949</i>	<i>0.750</i>	
# P-L9-022-127SF-NFR-SLC-19.050	22	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	66.68	74.9	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>2.625</i>	<i>2.949</i>	<i>0.700</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-024-125SF-PFR-AIS-12.000	24	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	72.74	79.2	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>2.864</i>	<i>3.118</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-024-125FF-PFR-AIS-12.000	24	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	72.74	79.2	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>2.864</i>	<i>3.118</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-024-125FF-ALA-SET-14.000	24	12.5	14.000	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	72.74	78.5	34.90	57.10
		<i>0.492</i>	<i>0.551</i>				<i>2.864</i>	<i>3.091</i>	<i>1.374</i>	<i>2.248</i>
# P-L9-024-125SF-PFR-AIS-16.000	24	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	72.74	79.2	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>2.864</i>	<i>3.118</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-024-125FF-PFR-AIS-16.000	24	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	72.74	79.2	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>2.864</i>	<i>3.118</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-024-127SF-NFR-AIS-07.950	24	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	72.74	80.0	25.40	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.864</i>	<i>3.150</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-024-127FF-NFR-AIS-07.950	24	12.7	7.950	Nylon, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	72.74	80.0	26.59	31.75
		<i>0.500</i>	<i>0.313</i>				<i>2.864</i>	<i>3.150</i>	<i>1.047</i>	<i>1.250</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-024-127SF-PFR-AIS-12.700	24	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	72.74	79.2	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>2.864</i>	<i>3.118</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-024-127FF-STL-SET-12.700	24	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	72.74	79.4	38.10	57.15
		<i>0.500</i>	<i>0.500</i>				<i>2.864</i>	<i>3.126</i>	<i>1.500</i>	<i>2.250</i>
# P-L9-024-127FF-PFR-AIS-12.700	24	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	72.74	79.2	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>2.864</i>	<i>3.118</i>	<i>1.210</i>	<i>1.125</i>
P-L9-024-127FF-ALA-SET-12.700	24	12.7	12.700	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	72.74	78.6	34.93	57.15
		<i>0.500</i>	<i>0.500</i>				<i>2.864</i>	<i>3.094</i>	<i>1.375</i>	<i>2.250</i>
# P-L9-024-127FF-ALA-SET-15.875	24	12.7	15.875	Aluminium, Clear Anodised	Set Screw	FF_G_H (Double Flange)	72.74	78.6	34.93	57.15
		<i>0.500</i>	<i>0.625</i>				<i>2.864</i>	<i>3.094</i>	<i>1.375</i>	<i>2.250</i>
# P-L9-024-127SF-PFR-AIS-15.875	24	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	72.74	79.2	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>2.864</i>	<i>3.118</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-024-127FF-PFR-AIS-15.875	24	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	72.74	79.2	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>2.864</i>	<i>3.118</i>	<i>1.210</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
P-L9-024-127FF-NFR-SLC-19.050	24	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	72.74	80.0	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>2.864</i>	<i>3.150</i>	<i>0.750</i>	
# P-L9-024-127SF-NFR-SLC-19.050	24	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	72.74	80.0	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>2.864</i>	<i>3.150</i>	<i>0.700</i>	
# P-L9-024-190SF-PFR-AIS-12.000	24	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	72.74	79.2	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>2.864</i>	<i>3.118</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-024-190FF-PFR-AIS-12.000	24	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	72.74	79.2	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>2.864</i>	<i>3.118</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-024-190SF-PFR-AIS-16.000	24	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	72.74	79.2	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>2.864</i>	<i>3.118</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-024-190FF-PFR-AIS-16.000	24	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	72.74	79.2	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>2.864</i>	<i>3.118</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-024-191SF-NFR-AIS-12.700	24	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	72.74	79.2	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>2.864</i>	<i>3.118</i>	<i>1.460</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-024-191FF-NFR-AIS-12.700	24	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	72.74	79.2	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>2.864</i>	<i>3.118</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-024-191FF-NFR-AIS-15.875	24	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	72.74	79.2	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>2.864</i>	<i>3.118</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-024-191SF-NFR-AIS-15.875	24	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	72.74	79.2	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>2.864</i>	<i>3.118</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-026-127FF-STL-SET-12.700	26	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	78.80	85.7	38.10	57.15
		<i>0.500</i>	<i>0.500</i>				<i>3.102</i>	<i>3.374</i>	<i>1.500</i>	<i>2.250</i>
# P-L9-028-127SF-NFR-AIS-09.538	28	12.7	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	84.86	90.2	25.40	31.75
		<i>0.500</i>	<i>0.376</i>				<i>3.341</i>	<i>3.551</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-028-127FF-STL-SET-12.700	28	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	84.86	90.5	38.10	57.15
		<i>0.500</i>	<i>0.500</i>				<i>3.341</i>	<i>3.563</i>	<i>1.500</i>	<i>2.250</i>
# P-L9-028-127FF-NFR-SLC-19.050	28	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	84.86	90.2	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>3.341</i>	<i>3.551</i>	<i>0.750</i>	

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-028-127SF-NFR-SLC-19.050	28	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	84.86	90.2	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>3.341</i>	<i>3.551</i>	<i>0.700</i>	
# P-L9-030-127SF-NFR-AIS-09.538	30	12.7	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	90.92	96.0	25.40	31.75
		<i>0.500</i>	<i>0.376</i>				<i>3.580</i>	<i>3.780</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-030-127FF-STL-SET-12.700	30	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	90.92	96.8	38.10	57.15
		<i>0.500</i>	<i>0.500</i>				<i>3.580</i>	<i>3.811</i>	<i>1.500</i>	<i>2.250</i>
# P-L9-030-127FF-NFR-SLC-19.050	30	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_OW (Double Flange)	90.92	96.0	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>3.580</i>	<i>3.780</i>	<i>0.750</i>	
# P-L9-030-127SF-NFR-SLC-19.050	30	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_OW (Single Flange)	90.92	96.0	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>3.580</i>	<i>3.780</i>	<i>0.700</i>	
# P-L9-032-127SF-NFR-AIS-09.538	32	12.7	9.538	Nylon, Fibreglass Reinforced	Set Screw	SF_GI_HW (Single Flange)	96.98	102.9	25.40	31.75
		<i>0.500</i>	<i>0.376</i>				<i>3.818</i>	<i>4.051</i>	<i>1.000</i>	<i>1.250</i>
# P-L9-032-127FF-STL-SET-12.700	32	12.7	12.700	Steel	Set Screw	FF_G_H (Double Flange)	96.98	103.2	41.28	65.09
		<i>0.500</i>	<i>0.500</i>				<i>3.818</i>	<i>4.063</i>	<i>1.625</i>	<i>2.563</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-032-127SF-NFR-SLC-19.050	32	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	SF_SL_0W (Single Flange)	96.98	102.9	17.78	
		<i>0.500</i>	<i>0.750</i>				<i>3.818</i>	<i>4.051</i>	<i>0.700</i>	
# P-L9-032-127FF-NFR-SLC-19.050	32	12.7	19.050	Nylon, Fibreglass Reinforced	Shaftloc -tm- (Sleeve sold separately)	FF_SL_0W (Double Flange)	96.98	102.9	19.05	
		<i>0.500</i>	<i>0.750</i>				<i>3.818</i>	<i>4.051</i>	<i>0.750</i>	
# P-L9-036-125FF-PFR-AIS-12.000	36	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	109.10	115.0	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>4.295</i>	<i>4.528</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-036-125SF-PFR-AIS-12.000	36	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	109.10	115.0	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>4.295</i>	<i>4.528</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-036-125FF-PFR-AIS-16.000	36	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	109.10	115.0	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>4.295</i>	<i>4.528</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-036-125SF-PFR-AIS-16.000	36	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	109.10	115.0	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>4.295</i>	<i>4.528</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-036-127SF-PFR-AIS-12.700	36	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	109.10	115.1	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>4.295</i>	<i>4.531</i>	<i>1.210</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-036-127FF-PFR-AIS-12.700	36	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	109.10	115.1	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>4.295</i>	<i>4.531</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-036-127SF-PFR-AIS-15.875	36	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	109.10	115.1	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>4.295</i>	<i>4.531</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-036-127FF-PFR-AIS-15.875	36	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	109.10	115.1	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>4.295</i>	<i>4.531</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-036-190SF-PFR-AIS-12.000	36	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	109.10	115.0	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>4.295</i>	<i>4.528</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-036-190FF-PFR-AIS-12.000	36	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	109.10	115.0	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>4.295</i>	<i>4.528</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-036-190FF-PFR-AIS-16.000	36	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	109.10	115.0	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>4.295</i>	<i>4.528</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-036-190SF-PFR-AIS-16.000	36	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	109.10	115.0	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>4.295</i>	<i>4.528</i>	<i>1.461</i>	<i>1.126</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-036-191SF-NFR-AIS-12.700	36	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	109.10	115.1	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>4.295</i>	<i>4.531</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-036-191FF-NFR-AIS-12.700	36	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	109.10	115.1	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>4.295</i>	<i>4.531</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-036-191SF-NFR-AIS-15.875	36	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	109.10	115.1	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>4.295</i>	<i>4.531</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-036-191FF-NFR-AIS-15.875	36	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	109.10	115.1	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>4.295</i>	<i>4.531</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-040-125FF-PFR-AIS-12.000	40	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	121.23	127.0	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>4.773</i>	<i>5.000</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-040-125SF-PFR-AIS-12.000	40	12.5	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	121.23	127.0	30.70	28.60
		<i>0.492</i>	<i>0.472</i>				<i>4.773</i>	<i>5.000</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-040-125FF-PFR-AIS-16.000	40	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	121.23	127.0	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>4.773</i>	<i>5.000</i>	<i>1.209</i>	<i>1.126</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-040-125SF-PFR-AIS-16.000	40	12.5	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	121.23	127.0	30.70	28.60
		<i>0.492</i>	<i>0.630</i>				<i>4.773</i>	<i>5.000</i>	<i>1.209</i>	<i>1.126</i>
# P-L9-040-127SF-PFR-AIS-12.700	40	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	121.23	127.0	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>4.773</i>	<i>5.000</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-040-127FF-PFR-AIS-12.700	40	12.7	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	121.23	127.0	30.73	28.58
		<i>0.500</i>	<i>0.500</i>				<i>4.773</i>	<i>5.000</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-040-127SF-PFR-AIS-15.875	40	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	121.23	127.0	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>4.773</i>	<i>5.000</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-040-127FF-PFR-AIS-15.875	40	12.7	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	121.23	127.0	30.73	28.58
		<i>0.500</i>	<i>0.625</i>				<i>4.773</i>	<i>5.000</i>	<i>1.210</i>	<i>1.125</i>
# P-L9-040-190SF-PFR-AIS-12.000	40	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	121.23	127.0	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>4.773</i>	<i>5.000</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-040-190FF-PFR-AIS-12.000	40	19.0	12.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	121.23	127.0	37.10	28.60
		<i>0.748</i>	<i>0.472</i>				<i>4.773</i>	<i>5.000</i>	<i>1.461</i>	<i>1.126</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Pulleys - Timing - 9.525mm Pitch - L

Part Number	Teeth (No.)	Suit Belt Width mm	Bore (d) mm	Material	Locking Type	Type (See Diagram)	Pitch Diameter (PD) mm	Flange Diameter (FD) mm	Overall Length (OL) mm	Hub Diameter (HD) mm
		<i>inches</i>	<i>inches</i>				<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>
# P-L9-040-190FF-PFR-AIS-16.000	40	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	FF_GI_HW (Double Flange)	121.23	127.0	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>4.773</i>	<i>5.000</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-040-190SF-PFR-AIS-16.000	40	19.0	16.000	Polycarbonate, Fibreglass Reinforced	Set Screw, Aluminium Insert	SF_GI_2HW (Single Flange)	121.23	127.0	37.10	28.60
		<i>0.748</i>	<i>0.630</i>				<i>4.773</i>	<i>5.000</i>	<i>1.461</i>	<i>1.126</i>
# P-L9-040-191FF-NFR-AIS-12.700	40	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	121.23	127.0	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>4.773</i>	<i>5.000</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-040-191SF-NFR-AIS-12.700	40	19.1	12.700	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	121.23	127.0	37.08	28.58
		<i>0.752</i>	<i>0.500</i>				<i>4.773</i>	<i>5.000</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-040-191SF-NFR-AIS-15.875	40	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	SF_GI_2HW (Single Flange)	121.23	127.0	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>4.773</i>	<i>5.000</i>	<i>1.460</i>	<i>1.125</i>
# P-L9-040-191FF-NFR-AIS-15.875	40	19.1	15.875	Polycarbonate, Fibreglass Reinforced	Set Screw	FF_GI_HW (Double Flange)	121.23	127.0	37.08	28.58
		<i>0.752</i>	<i>0.625</i>				<i>4.773</i>	<i>5.000</i>	<i>1.460</i>	<i>1.125</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au

