



# Screws - Countersunk - 304 Stainless - Slotted

10/4/2018

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## INFORMATION

Flat Head Countersunk UNC - UNF - METRIC.


Nuts sold seperately - See Nuts.

This catalogue to be read in conjunction with information at <http://www.minibearings.com.au//categories/nuts/all/pics/>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

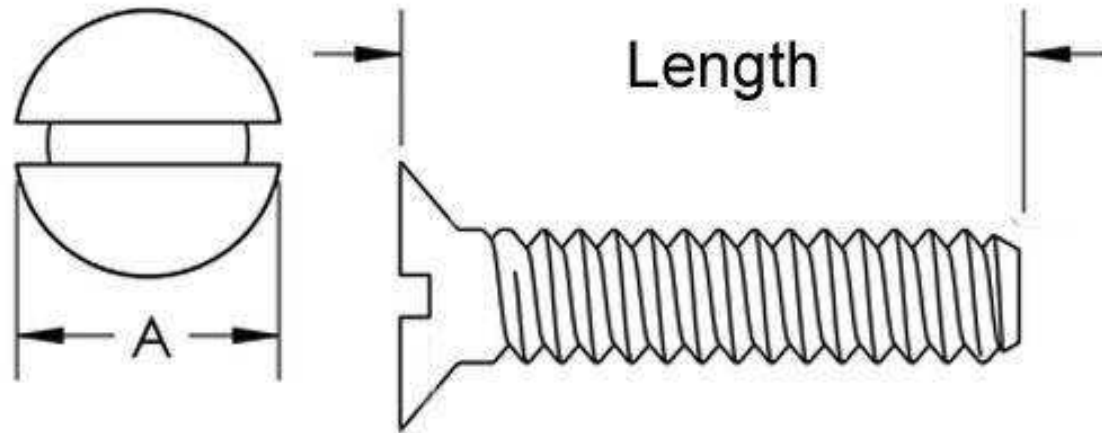

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
SK015F-003-SL-S4	0-80 UNF (1.524mm)	3.2 <i>0.126</i>	304 Stainless	3.02 <i>0.119</i>	0.89 <i>0.035</i>	Countersunk / Slotted	0.318 <i>0.013</i>
SK015F-005-SL-S4	0-80 UNF (1.524mm)	4.8 <i>0.189</i>	304 Stainless	3.02 <i>0.119</i>	0.89 <i>0.035</i>	Countersunk / Slotted	0.318 <i>0.013</i>
SK015F-006-SL-S4	0-80 UNF (1.524mm)	6.4 <i>0.252</i>	304 Stainless	3.02 <i>0.119</i>	0.89 <i>0.035</i>	Countersunk / Slotted	0.318 <i>0.013</i>
SK015F-008-SL-S4	0-80 UNF (1.524mm)	8 <i>0.315</i>	304 Stainless	3.02 <i>0.119</i>	0.89 <i>0.035</i>	Countersunk / Slotted	0.318 <i>0.013</i>
SK015F-010-SL-S4	0-80 UNF (1.524mm)	9.5 <i>0.374</i>	304 Stainless	3.02 <i>0.119</i>	0.89 <i>0.035</i>	Countersunk / Slotted	0.318 <i>0.013</i>
SK015F-013-SL-S4	0-80 UNF (1.524mm)	12.7 <i>0.500</i>	304 Stainless	3.02 <i>0.119</i>	0.89 <i>0.035</i>	Countersunk / Slotted	0.318 <i>0.013</i>
SK020M-004-SL-S4	M2x0.4 (2mm Standard)	4 <i>0.157</i>	304 Stainless	3.80 <i>0.150</i>	1.20 <i>0.047</i>	Countersunk / Slotted	0.400 <i>0.016</i>
SK020M-005-SL-S4	M2x0.4 (2mm Standard)	5 <i>0.197</i>	304 Stainless	3.80 <i>0.150</i>	1.20 <i>0.047</i>	Countersunk / Slotted	0.400 <i>0.016</i>
SK020M-006-SL-S4	M2x0.4 (2mm Standard)	6 <i>0.236</i>	304 Stainless	3.80 <i>0.150</i>	1.20 <i>0.047</i>	Countersunk / Slotted	0.400 <i>0.016</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 4 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
SK020M-008-SL-S4	M2x0.4 (2mm Standard)	8 <i>0.315</i>	304 Stainless	3.80 <i>0.150</i>	1.20 <i>0.047</i>	Countersunk / Slotted	0.400 <i>0.016</i>
SK020M-010-SL-S4	M2x0.4 (2mm Standard)	10 <i>0.394</i>	304 Stainless	3.80 <i>0.150</i>	1.20 <i>0.047</i>	Countersunk / Slotted	0.400 <i>0.016</i>
SK020M-012-SL-S4	M2x0.4 (2mm Standard)	12 <i>0.472</i>	304 Stainless	3.80 <i>0.150</i>	1.20 <i>0.047</i>	Countersunk / Slotted	0.400 <i>0.016</i>
# SK022C-005-SL-S4	2-56 UNC (2.184mm)	4.8 <i>0.189</i>	304 Stainless	4.37 <i>0.172</i>	1.29 <i>0.051</i>	Countersunk / Slotted	0.454 <i>0.018</i>
SK022C-006-SL-S4	2-56 UNC (2.184mm)	6.4 <i>0.252</i>	304 Stainless	4.37 <i>0.172</i>	1.29 <i>0.051</i>	Countersunk / Slotted	0.454 <i>0.018</i>
SK022C-008-SL-S4	2-56 UNC (2.184mm)	8 <i>0.315</i>	304 Stainless	4.37 <i>0.172</i>	1.29 <i>0.051</i>	Countersunk / Slotted	0.454 <i>0.018</i>
SK022C-010-SL-S4	2-56 UNC (2.184mm)	9.5 <i>0.374</i>	304 Stainless	4.37 <i>0.172</i>	1.29 <i>0.051</i>	Countersunk / Slotted	0.454 <i>0.018</i>
SK022C-013-SL-S4	2-56 UNC (2.184mm)	12.7 <i>0.500</i>	304 Stainless	4.37 <i>0.172</i>	1.29 <i>0.051</i>	Countersunk / Slotted	0.454 <i>0.018</i>
# SK025M-004-SL-S4	M2.5x0.45 (2.5mm Standard)	4 <i>0.157</i>	304 Stainless	4.70 <i>0.185</i>	1.50 <i>0.059</i>	Countersunk / Slotted	0.450 <i>0.018</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 5 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
SK025M-006-SL-S4	M2.5x0.45 (2.5mm Standard)	6 <i>0.236</i>	304 Stainless	4.70 <i>0.185</i>	1.50 <i>0.059</i>	Countersunk / Slotted	0.450 <i>0.018</i>
SK025M-008-SL-S4	M2.5x0.45 (2.5mm Standard)	8 <i>0.315</i>	304 Stainless	4.70 <i>0.185</i>	1.50 <i>0.059</i>	Countersunk / Slotted	0.450 <i>0.018</i>
SK025M-010-SL-S4	M2.5x0.45 (2.5mm Standard)	10 <i>0.394</i>	304 Stainless	4.70 <i>0.185</i>	1.50 <i>0.059</i>	Countersunk / Slotted	0.450 <i>0.018</i>
# SK025M-012-SL-S4	M2.5x0.45 (2.5mm Standard)	12 <i>0.472</i>	304 Stainless	4.70 <i>0.185</i>	1.50 <i>0.059</i>	Countersunk / Slotted	0.450 <i>0.018</i>
# SK025M-016-SL-S4	M2.5x0.45 (2.5mm Standard)	16 <i>0.630</i>	304 Stainless	4.70 <i>0.185</i>	1.50 <i>0.059</i>	Countersunk / Slotted	0.450 <i>0.018</i>
SK025M-020-SL-S4	M2.5x0.45 (2.5mm Standard)	20 <i>0.787</i>	304 Stainless	4.70 <i>0.185</i>	1.50 <i>0.059</i>	Countersunk / Slotted	0.450 <i>0.018</i>
# SK028C-005-SL-S4	4-40 UNC (2.845mm)	4.8 <i>0.189</i>	304 Stainless	5.72 <i>0.225</i>	1.70 <i>0.067</i>	Countersunk / Slotted	0.635 <i>0.025</i>
SK028C-006-SL-S4	4-40 UNC (2.845mm)	6.4 <i>0.252</i>	304 Stainless	5.72 <i>0.225</i>	1.70 <i>0.067</i>	Countersunk / Slotted	0.635 <i>0.025</i>
# SK028C-008-SL-S4	4-40 UNC (2.845mm)	8 <i>0.315</i>	304 Stainless	5.72 <i>0.225</i>	1.70 <i>0.067</i>	Countersunk / Slotted	0.635 <i>0.025</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 6 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK028C-010-SL-S4	4-40 UNC (2.845mm)	9.5 <i>0.374</i>	304 Stainless	5.72 <i>0.225</i>	1.70 <i>0.067</i>	Countersunk / Slotted	0.635 <i>0.025</i>
# SK028C-013-SL-S4	4-40 UNC (2.845mm)	12.7 <i>0.500</i>	304 Stainless	5.72 <i>0.225</i>	1.70 <i>0.067</i>	Countersunk / Slotted	0.635 <i>0.025</i>
SK028C-016-SL-S4	4-40 UNC (2.845mm)	15.9 <i>0.626</i>	304 Stainless	5.72 <i>0.225</i>	1.70 <i>0.067</i>	Countersunk / Slotted	0.635 <i>0.025</i>
SK030M-005-SL-S4	M3x0.5 (3mm Standard)	5 <i>0.197</i>	304 Stainless	5.60 <i>0.220</i>	1.65 <i>0.065</i>	Countersunk / Slotted	0.500 <i>0.020</i>
SK030M-006-SL-S4	M3x0.5 (3mm Standard)	6 <i>0.236</i>	304 Stainless	5.60 <i>0.220</i>	1.65 <i>0.065</i>	Countersunk / Slotted	0.500 <i>0.020</i>
# SK030M-008-SL-S4	M3x0.5 (3mm Standard)	8 <i>0.315</i>	304 Stainless	5.60 <i>0.220</i>	1.65 <i>0.065</i>	Countersunk / Slotted	0.500 <i>0.020</i>
# SK030M-010-SL-S4	M3x0.5 (3mm Standard)	10 <i>0.394</i>	304 Stainless	5.60 <i>0.220</i>	1.65 <i>0.065</i>	Countersunk / Slotted	0.500 <i>0.020</i>
# SK030M-012-SL-S4	M3x0.5 (3mm Standard)	12 <i>0.472</i>	304 Stainless	5.60 <i>0.220</i>	1.65 <i>0.065</i>	Countersunk / Slotted	0.500 <i>0.020</i>
SK030M-016-SL-S4	M3x0.5 (3mm Standard)	16 <i>0.630</i>	304 Stainless	5.60 <i>0.220</i>	1.65 <i>0.065</i>	Countersunk / Slotted	0.500 <i>0.020</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 7 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK030M-020-SL-S4	M3x0.5 (3mm Standard)	20 <i>0.787</i>	304 Stainless	5.60 <i>0.220</i>	1.65 <i>0.065</i>	Countersunk / Slotted	0.500 <i>0.020</i>
SK030M-025-SL-S4	M3x0.5 (3mm Standard)	25 <i>0.984</i>	304 Stainless	5.60 <i>0.220</i>	1.65 <i>0.065</i>	Countersunk / Slotted	0.500 <i>0.020</i>
# SK035C-005-SL-S4	6-32 UNC (3.5mm)	4.8 <i>0.189</i>	304 Stainless	7.09 <i>0.279</i>	2.11 <i>0.083</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK035C-006-SL-S4	6-32 UNC (3.5mm)	6.40 <i>0.252</i>	304 Stainless	7.09 <i>0.279</i>	2.11 <i>0.083</i>	Countersunk / Slotted	
SK035C-008-SL-S4	6-32 UNC (3.5mm)	8 <i>0.315</i>	304 Stainless	7.09 <i>0.279</i>	2.11 <i>0.083</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK035C-010-SL-S4	6-32 UNC (3.5mm)	9.5 <i>0.374</i>	304 Stainless	7.09 <i>0.279</i>	2.11 <i>0.083</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK035C-013-SL-S4	6-32 UNC (3.5mm)	12.70 <i>0.500</i>	304 Stainless	7.09 <i>0.279</i>	2.11 <i>0.083</i>	Countersunk / Slotted	
SK035C-016-SL-S4	6-32 UNC (3.5mm)	15.9 <i>0.626</i>	304 Stainless	7.09 <i>0.279</i>	2.11 <i>0.083</i>	Countersunk / Slotted	0.794 <i>0.031</i>
SK035C-019-SL-S4	6-32 UNC (3.5mm)	19.1 <i>0.752</i>	304 Stainless	7.09 <i>0.279</i>	2.11 <i>0.083</i>	Countersunk / Slotted	0.794 <i>0.031</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 8 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
SK039W-051-SL-S4	5/32-32 BSW (3.969mm)	50.80 <i>2.000</i>	304 Stainless	6.94 <i>0.273</i>	1.78 <i>0.070</i>	Countersunk / Slotted	
SK040M-006-SL-S4	M4x0.7 (4mm Standard)	6 <i>0.236</i>	304 Stainless	9.40 <i>0.370</i>	2.70 <i>0.106</i>	Countersunk / Slotted	0.700 <i>0.028</i>
# SK040M-008-SL-S4	M4x0.7 (4mm Standard)	8 <i>0.315</i>	304 Stainless	9.40 <i>0.370</i>	2.70 <i>0.106</i>	Countersunk / Slotted	0.700 <i>0.028</i>
# SK040M-010-SL-S4	M4x0.7 (4mm Standard)	10 <i>0.394</i>	304 Stainless	9.40 <i>0.370</i>	2.70 <i>0.106</i>	Countersunk / Slotted	0.700 <i>0.028</i>
SK040M-012-SL-S4	M4x0.7 (4mm Standard)	12 <i>0.472</i>	304 Stainless	9.40 <i>0.370</i>	2.70 <i>0.106</i>	Countersunk / Slotted	0.700 <i>0.028</i>
# SK040M-016-SL-S4	M4x0.7 (4mm Standard)	16 <i>0.630</i>	304 Stainless	9.40 <i>0.370</i>	2.70 <i>0.106</i>	Countersunk / Slotted	0.700 <i>0.028</i>
# SK042C-006-SL-S4	8-32 UNC (4.166mm)	6.4 <i>0.252</i>	304 Stainless	8.43 <i>0.332</i>	2.54 <i>0.100</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK042C-008-SL-S4	8-32 UNC (4.166mm)	8 <i>0.315</i>	304 Stainless	8.43 <i>0.332</i>	2.54 <i>0.100</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK042C-010-SL-S4	8-32 UNC (4.166mm)	9.50 <i>0.374</i>	304 Stainless	8.43 <i>0.332</i>	2.54 <i>0.100</i>	Countersunk / Slotted	

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 9 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK042C-013-SL-S4	8-32 UNC (4.166mm)	12.7 <i>0.500</i>	304 Stainless	8.43 <i>0.332</i>	2.54 <i>0.100</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK042C-016-SL-S4	8-32 UNC (4.166mm)	15.80 <i>0.622</i>	304 Stainless	8.43 <i>0.332</i>	2.54 <i>0.100</i>	Countersunk / Slotted	
# SK042C-019-SL-S4	8-32 UNC (4.166mm)	19.10 <i>0.752</i>	304 Stainless	8.43 <i>0.332</i>	2.54 <i>0.100</i>	Countersunk / Slotted	
# SK042C-025-SL-S4	8-32 UNC (4.166mm)	25.4 <i>1.000</i>	304 Stainless	8.43 <i>0.332</i>	2.54 <i>0.100</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK048F-006-SL-S4	10-32 UNF (4.762mm)	6.4 <i>0.252</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK048F-008-SL-S4	10-32 UNF (4.762mm)	8 <i>0.315</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK048F-013-SL-S4	10-32 UNF (4.762mm)	12.70 <i>0.500</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	
# SK048F-016-SL-S4	10-32 UNF (4.762mm)	15.80 <i>0.622</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	
# SK048F-019-SL-S4	10-32 UNF (4.762mm)	19.1 <i>0.752</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	0.794 <i>0.031</i>
# SK048F-025-SL-S4	10-32 UNF (4.762mm)	25.40 <i>1.000</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 10 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK048F-032-SL-S4	10-32 UNF (4.762mm)	31.80 <i>1.252</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	
# SK048F-038-SL-S4	10-32 UNF (4.762mm)	38.10 <i>1.500</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	
SK048F-051-SL-S4	10-32 UNF (4.762mm)	50.80 <i>2.000</i>	304 Stainless	9.78 <i>0.385</i>	2.95 <i>0.116</i>	Countersunk / Slotted	
# SK050M-008-SL-S4	M5x0.8 (5mm Standard)	8 <i>0.315</i>	304 Stainless	9.20 <i>0.362</i>	2.50 <i>0.098</i>	Countersunk / Slotted	0.800 <i>0.031</i>
# SK050M-010-SL-S4	M5x0.8 (5mm Standard)	10 <i>0.394</i>	304 Stainless	9.20 <i>0.362</i>	2.50 <i>0.098</i>	Countersunk / Slotted	0.800 <i>0.031</i>
# SK050M-012-SL-S4	M5x0.8 (5mm Standard)	12 <i>0.472</i>	304 Stainless	9.20 <i>0.362</i>	2.50 <i>0.098</i>	Countersunk / Slotted	0.800 <i>0.031</i>
# SK050M-016-SL-S4	M5x0.8 (5mm Standard)	16 <i>0.630</i>	304 Stainless	9.20 <i>0.362</i>	2.50 <i>0.098</i>	Countersunk / Slotted	0.800 <i>0.031</i>
# SK050M-020-SL-S4	M5x0.8 (5mm Standard)	20 <i>0.787</i>	304 Stainless	9.20 <i>0.362</i>	2.50 <i>0.098</i>	Countersunk / Slotted	0.800 <i>0.031</i>
# SK064C-006-SL-S4	1/4-20 UNC (6.35mm)	6.4 <i>0.252</i>	304 Stainless	12.88 <i>0.507</i>	3.89 <i>0.153</i>	Countersunk / Slotted	1.270 <i>0.050</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 11 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK064C-008-SL-S4	1/4-20 UNC (6.35mm)	8 <i>0.315</i>	304 Stainless	12.88 <i>0.507</i>	3.89 <i>0.153</i>	Countersunk / Slotted	1.270 <i>0.050</i>
# SK064C-010-SL-S4	1/4-20 UNC (6.35mm)	9.5 <i>0.374</i>	304 Stainless	12.88 <i>0.507</i>	3.89 <i>0.153</i>	Countersunk / Slotted	1.270 <i>0.050</i>
SK064C-013-SL-S4	1/4-20 UNC (6.35mm)	12.7 <i>0.500</i>	304 Stainless	12.88 <i>0.507</i>	3.89 <i>0.153</i>	Countersunk / Slotted	1.270 <i>0.050</i>
SK064C-016-SL-S4	1/4-20 UNC (6.35mm)	15.9 <i>0.626</i>	304 Stainless	12.88 <i>0.507</i>	3.89 <i>0.153</i>	Countersunk / Slotted	1.270 <i>0.050</i>
# SK064C-019-SL-S4	1/4-20 UNC (6.35mm)	19.1 <i>0.752</i>	304 Stainless	12.88 <i>0.507</i>	3.89 <i>0.153</i>	Countersunk / Slotted	1.270 <i>0.050</i>
# SK064C-025-SL-S4	1/4-20 UNC (6.35mm)	25.4 <i>1.000</i>	304 Stainless	12.88 <i>0.507</i>	3.89 <i>0.153</i>	Countersunk / Slotted	1.270 <i>0.050</i>
# SK080M-020-SL-S4	M8x1.25 (8mm Standard)	20 <i>0.787</i>	304 Stainless	17.30 <i>0.681</i>	4.00 <i>0.157</i>	Countersunk / Slotted	1.250 <i>0.049</i>
# SK127W-025-SL-S4	1/2-12 BSW (12.7mm)	25.40 <i>1.000</i>	304 Stainless	22.23 <i>0.875</i>	5.66 <i>0.223</i>	Countersunk / Slotted	
# SK127W-032-SL-S4	1/2-12 BSW (12.7mm)	31.80 <i>1.252</i>	304 Stainless	22.23 <i>0.875</i>	5.66 <i>0.223</i>	Countersunk / Slotted	
# SK127W-038-SL-S4	1/2-12 BSW (12.7mm)	38.10 <i>1.500</i>	304 Stainless	22.23 <i>0.875</i>	5.66 <i>0.223</i>	Countersunk / Slotted	

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 12 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - 304 Stainless - Slotted

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter (A) mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK127W-051-SL-S4	1/2-12 BSW (12.7mm)	50.80 <i>2.000</i>	304 Stainless	22.23 <i>0.875</i>	5.66 <i>0.223</i>	Countersunk / Slotted	
# SK127W-064-SL-S4	1/2-12 BSW (12.7mm)	63.50 <i>2.500</i>	304 Stainless	22.23 <i>0.875</i>	5.66 <i>0.223</i>	Countersunk / Slotted	
# SK127W-076-SL-S4	1/2-12 BSW (12.7mm)	76.20 <i>3.000</i>	304 Stainless	22.23 <i>0.875</i>	5.66 <i>0.223</i>	Countersunk / Slotted	

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

DISTRIBUTED BY

Distributed By:

