



# Screws - Countersunk - Steel - Pozidrive

10/4/2018

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Page 1 of 11

## INFORMATION

Flat Head Countersunk UNC - UNF - METRIC


Nuts sold seperately - See Nuts.

This catalogue to be read in conjunction with information at <http://www.minibearings.com.au//categories/nuts/all/pics/>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

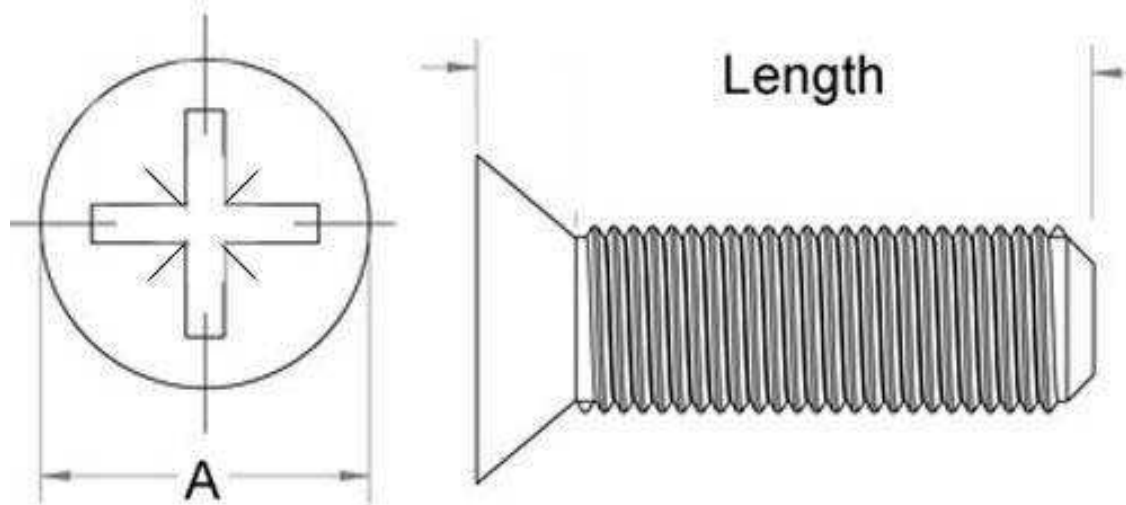

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - Steel - Pozidrive

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK025M-005-PZ-CZ	M2.5x0.45 (2.5mm Standard)	5 <i>0.197</i>	Zinc Plated	5.0 <i>0.197</i>	1.5 <i>0.059</i>	Countersunk / Pozidrive	0.450 <i>0.018</i>
# SK025M-006-PZ-CZ	M2.5x0.45 (2.5mm Standard)	6 <i>0.236</i>	Zinc Plated	5.0 <i>0.197</i>	1.5 <i>0.059</i>	Countersunk / Pozidrive	0.450 <i>0.018</i>
# SK025M-008-PZ-CZ	M2.5x0.45 (2.5mm Standard)	8 <i>0.315</i>	Zinc Plated	5.0 <i>0.197</i>	1.5 <i>0.059</i>	Countersunk / Pozidrive	0.450 <i>0.018</i>
# SK025M-010-PZ-CZ	M2.5x0.45 (2.5mm Standard)	10 <i>0.394</i>	Zinc Plated	5.0 <i>0.197</i>	1.5 <i>0.059</i>	Countersunk / Pozidrive	0.450 <i>0.018</i>
# SK025M-012-PZ-CZ	M2.5x0.45 (2.5mm Standard)	12 <i>0.472</i>	Zinc Plated	5.0 <i>0.197</i>	1.5 <i>0.059</i>	Countersunk / Pozidrive	0.450 <i>0.018</i>
# SK025M-016-PZ-CZ	M2.5x0.45 (2.5mm Standard)	16 <i>0.630</i>	Zinc Plated	5.0 <i>0.197</i>	1.5 <i>0.059</i>	Countersunk / Pozidrive	0.450 <i>0.018</i>
# SK025M-020-PZ-CZ	M2.5x0.45 (2.5mm Standard)	20 <i>0.787</i>	Zinc Plated	5.0 <i>0.197</i>	1.5 <i>0.059</i>	Countersunk / Pozidrive	0.450 <i>0.018</i>
# SK025M-025-PZ-CZ	M2.5x0.45 (2.5mm Standard)	25 <i>0.984</i>	Zinc Plated	5.0 <i>0.197</i>	1.5 <i>0.059</i>	Countersunk / Pozidrive	0.450 <i>0.018</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 4 of 11

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - Steel - Pozidrive

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK030M-005-PZ-CZ	M3x0.5 (3mm Standard)	5 <i>0.197</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>
SK030M-006-PZ-CZ	M3x0.5 (3mm Standard)	6 <i>0.236</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>
SK030M-008-PZ-CZ	M3x0.5 (3mm Standard)	8 <i>0.315</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>
SK030M-010-PZ-CZ	M3x0.5 (3mm Standard)	10 <i>0.394</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>
# SK030M-012-PZ-CZ	M3x0.5 (3mm Standard)	12 <i>0.472</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>
# SK030M-016-PZ-CZ	M3x0.5 (3mm Standard)	16 <i>0.630</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>
# SK030M-020-PZ-CZ	M3x0.5 (3mm Standard)	20 <i>0.787</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>
# SK030M-025-PZ-CZ	M3x0.5 (3mm Standard)	25 <i>0.984</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 5 of 11

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - Steel - Pozidrive

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK030M-030-PZ-CZ	M3x0.5 (3mm Standard)	30 <i>1.181</i>	Zinc Plated	6.0 <i>0.236</i>	1.7 <i>0.067</i>	Countersunk / Pozidrive	0.500 <i>0.020</i>
# SK040M-006-PZ-CZ	M4x0.7 (4mm Standard)	6 <i>0.236</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
SK040M-008-PZ-CZ	M4x0.7 (4mm Standard)	8 <i>0.315</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
# SK040M-010-PZ-CZ	M4x0.7 (4mm Standard)	10 <i>0.394</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
# SK040M-012-PZ-CZ	M4x0.7 (4mm Standard)	12 <i>0.472</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
# SK040M-016-PZ-CZ	M4x0.7 (4mm Standard)	16 <i>0.630</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
SK040M-020-PZ-CZ	M4x0.7 (4mm Standard)	20 <i>0.787</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
# SK040M-025-PZ-CZ	M4x0.7 (4mm Standard)	25 <i>0.984</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 6 of 11

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - Steel - Pozidrive

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK040M-030-PZ-CZ	M4x0.7 (4mm Standard)	30 <i>1.181</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
# SK040M-035-PZ-CZ	M4x0.7 (4mm Standard)	35 <i>1.378</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
# SK040M-040-PZ-CZ	M4x0.7 (4mm Standard)	40 <i>1.575</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
# SK040M-050-PZ-CZ	M4x0.7 (4mm Standard)	50 <i>1.969</i>	Zinc Plated Steel	8.0 <i>0.315</i>	2.3 <i>0.091</i>	Countersunk / Pozidrive	0.700 <i>0.028</i>
SK050M-008-PZ-CZ	M5x0.8 (5mm Standard)	8 <i>0.315</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>
# SK050M-010-PZ-CZ	M5x0.8 (5mm Standard)	10 <i>0.394</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>
# SK050M-012-PZ-CZ	M5x0.8 (5mm Standard)	12 <i>0.472</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>
# SK050M-016-PZ-CZ	M5x0.8 (5mm Standard)	16 <i>0.630</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 7 of 11

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - Steel - Pozidrive

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK050M-020-PZ-CZ	M5x0.8 (5mm Standard)	20 <i>0.787</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>
# SK050M-025-PZ-CZ	M5x0.8 (5mm Standard)	25 <i>0.984</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>
# SK050M-030-PZ-CZ	M5x0.8 (5mm Standard)	30 <i>1.181</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>
# SK050M-040-PZ-CZ	M5x0.8 (5mm Standard)	40 <i>1.575</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>
# SK050M-050-PZ-CZ	M5x0.8 (5mm Standard)	50 <i>1.969</i>	Zinc Plated Steel	10.0 <i>0.394</i>	2.8 <i>0.110</i>	Countersunk / Pozidrive	0.800 <i>0.031</i>
# SK060M-010-PZ-CZ	M6x1 (6mm Standard)	10 <i>0.394</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-012-PZ-CZ	M6x1 (6mm Standard)	12 <i>0.472</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-016-PZ-CZ	M6x1 (6mm Standard)	16 <i>0.630</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 8 of 11

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



## Screws - Countersunk - Steel - Pozidrive

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK060M-020-PZ-CZ	M6x1 (6mm Standard)	20 <i>0.787</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-025-PZ-CZ	M6x1 (6mm Standard)	25 <i>0.984</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-030-PZ-CZ	M6x1 (6mm Standard)	30 <i>1.181</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-035-PZ-CZ	M6x1 (6mm Standard)	35 <i>1.378</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-040-PZ-CZ	M6x1 (6mm Standard)	40 <i>1.575</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-050-PZ-CZ	M6x1 (6mm Standard)	50 <i>1.969</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-065-PZ-CZ	M6x1 (6mm Standard)	65 <i>2.559</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>
# SK060M-075-PZ-CZ	M6x1 (6mm Standard)	75 <i>2.953</i>	Zinc Plated Steel	12.0 <i>0.472</i>	3.3 <i>0.130</i>	Countersunk / Pozidrive	1.000 <i>0.039</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 9 of 11

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - Steel - Pozidrive

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK080M-020-PZ-CZ	M8x1.25 (8mm Standard)	20 <i>0.787</i>	Zinc Plated Steel	16.0 <i>0.630</i>	4.4 <i>0.173</i>	Countersunk / Pozidrive	1.250 <i>0.049</i>
# SK080M-025-PZ-CZ	M8x1.25 (8mm Standard)	25 <i>0.984</i>	Zinc Plated Steel	16.0 <i>0.630</i>	4.4 <i>0.173</i>	Countersunk / Pozidrive	1.250 <i>0.049</i>
# SK080M-030-PZ-CZ	M8x1.25 (8mm Standard)	30 <i>1.181</i>	Zinc Plated Steel	16.0 <i>0.630</i>	4.4 <i>0.173</i>	Countersunk / Pozidrive	1.250 <i>0.049</i>
# SK080M-040-PZ-CZ	M8x1.25 (8mm Standard)	40 <i>1.575</i>	Zinc Plated Steel	16.0 <i>0.630</i>	4.4 <i>0.173</i>	Countersunk / Pozidrive	1.250 <i>0.049</i>
# SK080M-050-PZ-CZ	M8x1.25 (8mm Standard)	50 <i>1.969</i>	Zinc Plated Steel	16.0 <i>0.630</i>	4.4 <i>0.173</i>	Countersunk / Pozidrive	1.250 <i>0.049</i>
# SK100M-020-PZ-CZ	M10x1.5 (10mm Standard)	20 <i>0.787</i>	Zinc Plated Steel	20.0 <i>0.787</i>	5.5 <i>0.217</i>	Countersunk / Pozidrive	1.500 <i>0.059</i>
# SK100M-025-PZ-CZ	M10x1.5 (10mm Standard)	25 <i>0.984</i>	Zinc Plated Steel	20.0 <i>0.787</i>	5.5 <i>0.217</i>	Countersunk / Pozidrive	1.500 <i>0.059</i>
# SK100M-030-PZ-CZ	M10x1.5 (10mm Standard)	30 <i>1.181</i>	Zinc Plated Steel	20.0 <i>0.787</i>	5.5 <i>0.217</i>	Countersunk / Pozidrive	1.500 <i>0.059</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 10 of 11

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Countersunk - Steel - Pozidrive

Part Number	Thread Size (C)	Length to top edge (L) mm	Material	Max Head Diameter mm	Max Head Height mm	Type	Pitch mm
		<i>inches</i>		<i>inches</i>	<i>inches</i>		<i>inches</i>
# SK100M-040-PZ-CZ	M10x1.5 (10mm Standard)	40 <i>1.575</i>	Zinc Plated Steel	20.0 <i>0.787</i>	5.5 <i>0.217</i>	Countersunk / Pozidrive	1.500 <i>0.059</i>
# SK100M-050-PZ-CZ	M10x1.5 (10mm Standard)	50 <i>1.969</i>	Zinc Plated Steel	20.0 <i>0.787</i>	5.5 <i>0.217</i>	Countersunk / Pozidrive	1.500 <i>0.059</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 11 of 11

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd  
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

DISTRIBUTED BY

Distributed By:

