



Screws - Countersunk - Steel - Slotted

10/4/2018

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

INFORMATION

Flat Head Countersunk UNC - UNF - BA - METRIC


Nuts sold seperately - See Nuts.

This catalogue to be read in conjunction with information at <http://www.minibearings.com.au//categories/nuts/all/pics/>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

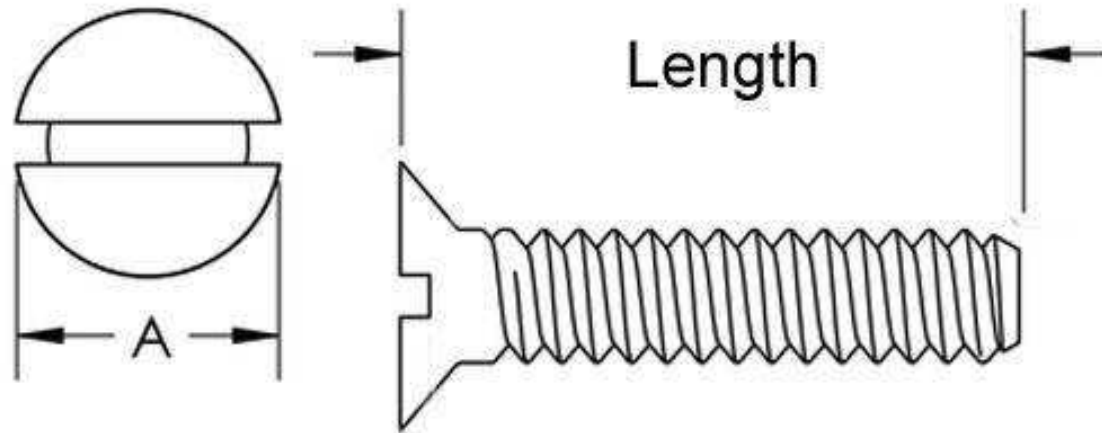

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|----------------------------|---------------------------|-------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| SK025M-005-SL-CZ | M2.5x0.45 (2.5mm Standard) | 5 <i>0.197</i> | Zinc Plated | 5.0 <i>0.197</i> | 1.5 <i>0.059</i> | Countersunk / Slotted | 0.450 <i>0.018</i> |
| # SK025M-006-SL-CZ | M2.5x0.45 (2.5mm Standard) | 6 <i>0.236</i> | Zinc Plated | 5.0 <i>0.197</i> | 1.5 <i>0.059</i> | Countersunk / Slotted | 0.450 <i>0.018</i> |
| # SK025M-008-SL-CZ | M2.5x0.45 (2.5mm Standard) | 8 <i>0.315</i> | Zinc Plated | 5.0 <i>0.197</i> | 1.5 <i>0.059</i> | Countersunk / Slotted | 0.450 <i>0.018</i> |
| SK025M-010-SL-CZ | M2.5x0.45 (2.5mm Standard) | 10 <i>0.394</i> | Zinc Plated | 5.0 <i>0.197</i> | 1.5 <i>0.059</i> | Countersunk / Slotted | 0.450 <i>0.018</i> |
| # SK025M-012-SL-CZ | M2.5x0.45 (2.5mm Standard) | 12 <i>0.472</i> | Zinc Plated | 5.0 <i>0.197</i> | 1.5 <i>0.059</i> | Countersunk / Slotted | 0.450 <i>0.018</i> |
| # SK025M-016-SL-CZ | M2.5x0.45 (2.5mm Standard) | 16 <i>0.630</i> | Zinc Plated | 5.0 <i>0.197</i> | 1.5 <i>0.059</i> | Countersunk / Slotted | 0.450 <i>0.018</i> |
| # SK025M-020-SL-CZ | M2.5x0.45 (2.5mm Standard) | 20 <i>0.787</i> | Zinc Plated | 5.0 <i>0.197</i> | 1.5 <i>0.059</i> | Countersunk / Slotted | 0.450 <i>0.018</i> |
| SK025M-025-SL-CZ | M2.5x0.45 (2.5mm Standard) | 25 <i>0.984</i> | Zinc Plated | 5.0 <i>0.197</i> | 1.5 <i>0.059</i> | Countersunk / Slotted | 0.450 <i>0.018</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 4 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|-----------------------|---------------------------|-------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK028B-013-SL-CZ | 6BA (2.794mm) | 12.7 <i>0.500</i> | Zinc Plated | 5.4 <i>0.213</i> | 1.3 <i>0.051</i> | Countersunk / Slotted | 0.530 <i>0.021</i> |
| # SK028B-019-SL-CZ | 6BA (2.794mm) | 19.1 <i>0.752</i> | Zinc Plated | 5.4 <i>0.213</i> | 1.3 <i>0.051</i> | Countersunk / Slotted | 0.530 <i>0.021</i> |
| # SK028B-025-SL-CZ | 6BA (2.794mm) | 25.4 <i>1.000</i> | Zinc Plated | 5.4 <i>0.213</i> | 1.3 <i>0.051</i> | Countersunk / Slotted | 0.530 <i>0.021</i> |
| # SK028B-038-SL-CZ | 6BA (2.794mm) | 38.1 <i>1.500</i> | Zinc Plated | 5.4 <i>0.213</i> | 1.3 <i>0.051</i> | Countersunk / Slotted | 0.530 <i>0.021</i> |
| # SK030M-005-SL-CZ | M3x0.5 (3mm Standard) | 5 <i>0.197</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| # SK030M-006-SL-CZ | M3x0.5 (3mm Standard) | 6 <i>0.236</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| # SK030M-008-SL-CZ | M3x0.5 (3mm Standard) | 8 <i>0.315</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| # SK030M-010-SL-CZ | M3x0.5 (3mm Standard) | 10 <i>0.394</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| # SK030M-012-SL-CZ | M3x0.5 (3mm Standard) | 12 <i>0.472</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 5 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|-----------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK030M-016-SL-CZ | M3x0.5 (3mm Standard) | 16 <i>0.630</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| # SK030M-020-SL-CZ | M3x0.5 (3mm Standard) | 20 <i>0.787</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| # SK030M-025-SL-CZ | M3x0.5 (3mm Standard) | 25 <i>0.984</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| SK030M-030-SL-CZ | M3x0.5 (3mm Standard) | 30 <i>1.181</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| # SK030M-035-SL-CZ | M3x0.5 (3mm Standard) | 35 <i>1.378</i> | Zinc Plated | 6.0 <i>0.236</i> | 1.7 <i>0.067</i> | Countersunk / Slotted | 0.500 <i>0.020</i> |
| SK032W-006-SL-CZ | 1/8-40 BSW (3.175mm) | 6.4 <i>0.252</i> | Zinc Plated Steel | 7.1 <i>0.280</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.635 <i>0.025</i> |
| SK032W-010-SL-CZ | 1/8-40 BSW (3.175mm) | 9.5 <i>0.374</i> | Zinc Plated Steel | 7.1 <i>0.280</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.635 <i>0.025</i> |
| # SK032W-013-SL-CZ | 1/8-40 BSW (3.175mm) | 12.7 <i>0.500</i> | Zinc Plated Steel | 7.1 <i>0.280</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.635 <i>0.025</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 6 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|------------------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK032W-016-SL-CZ | 1/8-40 BSW (3.175mm) | 15.9 <i>0.626</i> | Zinc Plated Steel | 7.1 <i>0.280</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.635 <i>0.025</i> |
| # SK032W-019-SL-CZ | 1/8-40 BSW (3.175mm) | 19.1 <i>0.752</i> | Zinc Plated Steel | 7.1 <i>0.280</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.635 <i>0.025</i> |
| # SK032W-025-SL-CZ | 1/8-40 BSW (3.175mm) | 25.4 <i>1.000</i> | Zinc Plated Steel | 7.1 <i>0.280</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.635 <i>0.025</i> |
| # SK032W-032-SL-CZ | 1/8-40 BSW (3.175mm) | 31.8 <i>1.252</i> | Zinc Plated Steel | 7.1 <i>0.280</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.635 <i>0.025</i> |
| # SK032W-038-SL-CZ | 1/8-40 BSW (3.175mm) | 38.1 <i>1.500</i> | Zinc Plated Steel | 7.1 <i>0.280</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.635 <i>0.025</i> |
| # SK035M-006-SL-CZ | M3.5x0.6 (3.5mm Standard) | 6 <i>0.236</i> | Zinc Plated Steel | 8.2 <i>0.323</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.600 <i>0.024</i> |
| # SK035M-010-SL-CZ | M3.5x0.6 (3.5mm Standard) | 10 <i>0.394</i> | Zinc Plated Steel | 8.2 <i>0.323</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.600 <i>0.024</i> |
| SK035M-012-SL-CZ | M3.5x0.6 (3.5mm Standard) | 12 <i>0.472</i> | Zinc Plated Steel | 8.2 <i>0.323</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.600 <i>0.024</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 7 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|---------------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK035M-016-SL-CZ | M3.5x0.6 (3.5mm Standard) | 16 <i>0.630</i> | Zinc Plated Steel | 8.2 <i>0.323</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.600 <i>0.024</i> |
| SK035M-020-SL-CZ | M3.5x0.6 (3.5mm Standard) | 20 <i>0.787</i> | Zinc Plated Steel | 8.2 <i>0.323</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.600 <i>0.024</i> |
| # SK035M-025-SL-CZ | M3.5x0.6 (3.5mm Standard) | 25 <i>0.984</i> | Zinc Plated Steel | 8.2 <i>0.323</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.600 <i>0.024</i> |
| # SK036B-013-SL-CZ | 4 BA (3.607mm) | 12.7 <i>0.500</i> | Zinc Plated Steel | 6.8 <i>0.268</i> | 1.6 <i>0.063</i> | Countersunk / Slotted | 0.660 <i>0.026</i> |
| # SK036B-019-SL-CZ | 4 BA (3.607mm) | 19.1 <i>0.752</i> | Zinc Plated Steel | 6.8 <i>0.268</i> | 1.6 <i>0.063</i> | Countersunk / Slotted | 0.660 <i>0.026</i> |
| # SK036B-025-SL-CZ | 4 BA (3.607mm) | 25.4 <i>1.000</i> | Zinc Plated Steel | 6.8 <i>0.268</i> | 1.6 <i>0.063</i> | Countersunk / Slotted | 0.660 <i>0.026</i> |
| # SK036B-038-SL-CZ | 4 BA (3.607mm) | 38.1 <i>1.500</i> | Zinc Plated Steel | 6.8 <i>0.268</i> | 1.6 <i>0.063</i> | Countersunk / Slotted | 0.660 <i>0.026</i> |
| # SK039W-006-SL-CZ | 5/32-32 BSW (3.969mm) | 6.4 <i>0.252</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |
| # SK039W-010-SL-CZ | 5/32-32 BSW (3.969mm) | 9.5 <i>0.374</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 8 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|--------------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK039W-013-SL-CZ | 5/32-32 BSW (3.969mm) | 12.7 <i>0.500</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |
| # SK039W-016-SL-CZ | 5/32-32 BSW (3.969mm) | 15.9 <i>0.626</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |
| # SK039W-019-SL-CZ | 5/32-32 BSW (3.969mm) | 19.1 <i>0.752</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |
| # SK039W-025-SL-CZ | 5/32-32 BSW (3.969mm) | 25.4 <i>1.000</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |
| SK039W-032-SL-CZ | 5/32-32 BSW (3.969mm) | 31.8 <i>1.252</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |
| # SK039W-038-SL-CZ | 5/32-32 BSW (3.969mm) | 38.1 <i>1.500</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |
| # SK039W-045-SL-CZ | 5/32-32 BSW (3.969mm) | 44.5 <i>1.752</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |
| # SK039W-051-SL-CZ | 5/32-32 BSW (3.969mm) | 50.8 <i>2.000</i> | Zinc Plated Steel | 7.0 <i>0.276</i> | 1.8 <i>0.071</i> | Countersunk / Slotted | 0.794 <i>0.031</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 9 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|-----------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK040M-006-SL-CZ | M4x0.7 (4mm Standard) | 6 <i>0.236</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-008-SL-CZ | M4x0.7 (4mm Standard) | 8 <i>0.315</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-010-SL-CZ | M4x0.7 (4mm Standard) | 10 <i>0.394</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-012-SL-CZ | M4x0.7 (4mm Standard) | 12 <i>0.472</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-016-SL-CZ | M4x0.7 (4mm Standard) | 16 <i>0.630</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-020-SL-CZ | M4x0.7 (4mm Standard) | 20 <i>0.787</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-025-SL-CZ | M4x0.7 (4mm Standard) | 25 <i>0.984</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-030-SL-CZ | M4x0.7 (4mm Standard) | 30 <i>1.181</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 10 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|-----------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| SK040M-035-SL-CZ | M4x0.7 (4mm Standard) | 35 <i>1.378</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-040-SL-CZ | M4x0.7 (4mm Standard) | 40 <i>1.575</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK040M-050-SL-CZ | M4x0.7 (4mm Standard) | 50 <i>1.969</i> | Zinc Plated Steel | 8.0 <i>0.315</i> | 2.3 <i>0.091</i> | Countersunk / Slotted | 0.700 <i>0.028</i> |
| # SK047B-013-SL-CZ | 2BA (4.7mm) | 12.7 <i>0.500</i> | Zinc Plated Steel | 8.9 <i>0.350</i> | 2.1 <i>0.083</i> | Countersunk / Slotted | 0.812 <i>0.032</i> |
| # SK047B-019-SL-CZ | 2BA (4.7mm) | 19.1 <i>0.752</i> | Zinc Plated Steel | 8.9 <i>0.350</i> | 2.1 <i>0.083</i> | Countersunk / Slotted | 0.812 <i>0.032</i> |
| # SK047B-025-SL-CZ | 2BA (4.7mm) | 25.4 <i>1.000</i> | Zinc Plated Steel | 8.9 <i>0.350</i> | 2.1 <i>0.083</i> | Countersunk / Slotted | 0.812 <i>0.032</i> |
| # SK047B-038-SL-CZ | 2BA (4.7mm) | 38.1 <i>1.500</i> | Zinc Plated Steel | 8.9 <i>0.350</i> | 2.1 <i>0.083</i> | Countersunk / Slotted | 0.812 <i>0.032</i> |
| # SK048W-006-SL-CZ | 3/16-24 BSW (4.762mm) | 6.4 <i>0.252</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| # SK048W-010-SL-CZ | 3/16-24 BSW (4.762mm) | 9.5 <i>0.374</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 11 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|--------------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK048W-013-SL-CZ | 3/16-24 BSW (4.762mm) | 12.7 <i>0.500</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| # SK048W-016-SL-CZ | 3/16-24 BSW (4.762mm) | 15.9 <i>0.626</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| # SK048W-019-SL-CZ | 3/16-24 BSW (4.762mm) | 19.1 <i>0.752</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| SK048W-025-SL-CZ | 3/16-24 BSW (4.762mm) | 25.4 <i>1.000</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| # SK048W-032-SL-CZ | 3/16-24 BSW (4.762mm) | 31.8 <i>1.252</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| # SK048W-038-SL-CZ | 3/16-24 BSW (4.762mm) | 38.1 <i>1.500</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| # SK048W-045-SL-CZ | 3/16-24 BSW (4.762mm) | 44.5 <i>1.752</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| # SK048W-051-SL-CZ | 3/16-24 BSW (4.762mm) | 50.8 <i>2.000</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 12 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|--------------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK048W-064-SL-CZ | 3/16-24 BSW (4.762mm) | 63.5 <i>2.500</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| # SK048W-076-SL-CZ | 3/16-24 BSW (4.762mm) | 76.2 <i>3.000</i> | Zinc Plated Steel | 10.4 <i>0.409</i> | 3.2 <i>0.126</i> | Countersunk / Slotted | 1.058 <i>0.042</i> |
| SK050M-008-SL-CZ | M5x0.8 (5mm Standard) | 8 <i>0.315</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-010-SL-CZ | M5x0.8 (5mm Standard) | 10 <i>0.394</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-012-SL-CZ | M5x0.8 (5mm Standard) | 12 <i>0.472</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-016-SL-CZ | M5x0.8 (5mm Standard) | 16 <i>0.630</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-020-SL-CZ | M5x0.8 (5mm Standard) | 20 <i>0.787</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-025-SL-CZ | M5x0.8 (5mm Standard) | 25 <i>0.984</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 13 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|-----------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK050M-030-SL-CZ | M5x0.8 (5mm Standard) | 30 <i>1.181</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-040-SL-CZ | M5x0.8 (5mm Standard) | 40 <i>1.575</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-050-SL-CZ | M5x0.8 (5mm Standard) | 50 <i>1.969</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-065-SL-CZ | M5x0.8 (5mm Standard) | 65 <i>2.559</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK050M-075-SL-CZ | M5x0.8 (5mm Standard) | 75 <i>2.953</i> | Zinc Plated Steel | 10.0 <i>0.394</i> | 2.8 <i>0.110</i> | Countersunk / Slotted | 0.800 <i>0.031</i> |
| # SK060M-010-SL-CZ | M6x1 (6mm Standard) | 10 <i>0.394</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-012-SL-CZ | M6x1 (6mm Standard) | 12 <i>0.472</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-016-SL-CZ | M6x1 (6mm Standard) | 16 <i>0.630</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-020-SL-CZ | M6x1 (6mm Standard) | 20 <i>0.787</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 14 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|---------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK060M-025-SL-CZ | M6x1 (6mm Standard) | 25 <i>0.984</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-030-SL-CZ | M6x1 (6mm Standard) | 30 <i>1.181</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-035-SL-CZ | M6x1 (6mm Standard) | 35 <i>1.378</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-040-SL-CZ | M6x1 (6mm Standard) | 40 <i>1.575</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-050-SL-CZ | M6x1 (6mm Standard) | 50 <i>1.969</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-065-SL-CZ | M6x1 (6mm Standard) | 65 <i>2.559</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK060M-075-SL-CZ | M6x1 (6mm Standard) | 75 <i>2.953</i> | Zinc Plated Steel | 12.0 <i>0.472</i> | 3.3 <i>0.130</i> | Countersunk / Slotted | 1.000 <i>0.039</i> |
| # SK064W-010-SL-CZ | 1/4-20 BSW (6.35mm) | 9.5 <i>0.374</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-013-SL-CZ | 1/4-20 BSW (6.35mm) | 12.7 <i>0.500</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-016-SL-CZ | 1/4-20 BSW (6.35mm) | 15.9 <i>0.626</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 15 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|--------------------------|---------------------------|-------------------|----------------------|---------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK064W-019-SL-CZ | 1/4-20 BSW (6.35mm) | 19.1 <i>0.752</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-025-SL-CZ | 1/4-20 BSW (6.35mm) | 25.4 <i>1.000</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-032-SL-CZ | 1/4-20 BSW (6.35mm) | 31.8 <i>1.252</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-038-SL-CZ | 1/4-20 BSW (6.35mm) | 38.1 <i>1.500</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-045-SL-CZ | 1/4-20 BSW (6.35mm) | 44.5 <i>1.752</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-051-SL-CZ | 1/4-20 BSW (6.35mm) | 50.8 <i>2.000</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-064-SL-CZ | 1/4-20 BSW (6.35mm) | 63.5 <i>2.500</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK064W-076-SL-CZ | 1/4-20 BSW (6.35mm) | 76.2 <i>3.000</i> | Zinc Plated Steel | 13.5 <i>0.531</i> | 4.1 <i>0.161</i> | Countersunk / Slotted | 1.270 <i>0.050</i> |
| # SK120M-030-SL-CZ | M12x1.75 (12mm Standard) | 30 <i>1.181</i> | Zinc Plated Steel | 24.0 <i>0.945</i> | 6.5 <i>0.256</i> | Countersunk / Slotted | 1.750 <i>0.069</i> |
| # SK120M-040-SL-CZ | M12x1.75 (12mm Standard) | 40 <i>1.575</i> | Zinc Plated Steel | 24.0 <i>0.945</i> | 6.5 <i>0.256</i> | Countersunk / Slotted | 1.750 <i>0.069</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 16 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Countersunk - Steel - Slotted

| Part Number | Thread Size (C) | Length to top edge (L) mm | Material | Max Head Diameter mm | Max Head Height mm | Type | Pitch mm |
|--------------------|--------------------------|---------------------------|-------------------|----------------------|----------------------|-----------------------|-----------------------|
| | | <i>inches</i> | | <i>inches</i> | <i>inches</i> | | <i>inches</i> |
| # SK120M-050-SL-CZ | M12x1.75 (12mm Standard) | 50 <i>1.969</i> | Zinc Plated Steel | 24.0 <i>0.945</i> | 6.5 <i>0.256</i> | Countersunk / Slotted | 1.750 <i>0.069</i> |
| # SK120M-065-SL-CZ | M12x1.75 (12mm Standard) | 65 <i>2.559</i> | Zinc Plated Steel | 24.0 <i>0.945</i> | 6.5 <i>0.256</i> | Countersunk / Slotted | 1.750 <i>0.069</i> |
| # SK127W-025-SL-CZ | 1/2-12 BSW (12.7mm) | 25.4 <i>1.000</i> | Zinc Plated Steel | 23.8 <i>0.937</i> | 10.0 <i>0.394</i> | Countersunk / Slotted | 2.117 <i>0.083</i> |
| # SK127W-032-SL-CZ | 1/2-12 BSW (12.7mm) | 31.8 <i>1.252</i> | Zinc Plated Steel | 23.8 <i>0.937</i> | 10.0 <i>0.394</i> | Countersunk / Slotted | 2.117 <i>0.083</i> |
| # SK127W-038-SL-CZ | 1/2-12 BSW (12.7mm) | 38.1 <i>1.500</i> | Zinc Plated Steel | 23.8 <i>0.937</i> | 10.0 <i>0.394</i> | Countersunk / Slotted | 2.117 <i>0.083</i> |
| # SK127W-051-SL-CZ | 1/2-12 BSW (12.7mm) | 50.8 <i>2.000</i> | Zinc Plated Steel | 23.8 <i>0.937</i> | 10.0 <i>0.394</i> | Countersunk / Slotted | 2.117 <i>0.083</i> |
| # SK160M-040-SL-CZ | M16x2 (16mm Standard) | 40 <i>1.575</i> | Zinc Plated Steel | 30.0 <i>1.181</i> | 7.5 <i>0.295</i> | Countersunk / Slotted | 2.000 <i>0.079</i> |
| # SK160M-050-SL-CZ | M16x2 (16mm Standard) | 50 <i>1.969</i> | Zinc Plated Steel | 30.0 <i>1.181</i> | 7.5 <i>0.295</i> | Countersunk / Slotted | 2.000 <i>0.079</i> |
| # SK160M-065-SL-CZ | M16x2 (16mm Standard) | 65 <i>2.559</i> | Zinc Plated Steel | 30.0 <i>1.181</i> | 7.5 <i>0.295</i> | Countersunk / Slotted | 2.000 <i>0.079</i> |

Indicates item not stocked at time of printing - Please enquire for lead time

Page 17 of 17

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

DISTRIBUTED BY

Distributed By:

