



Screws - Thumb - Knurled - Nylon

10/4/2018

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.


INFORMATION

Nylon knurled head thumb screws

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

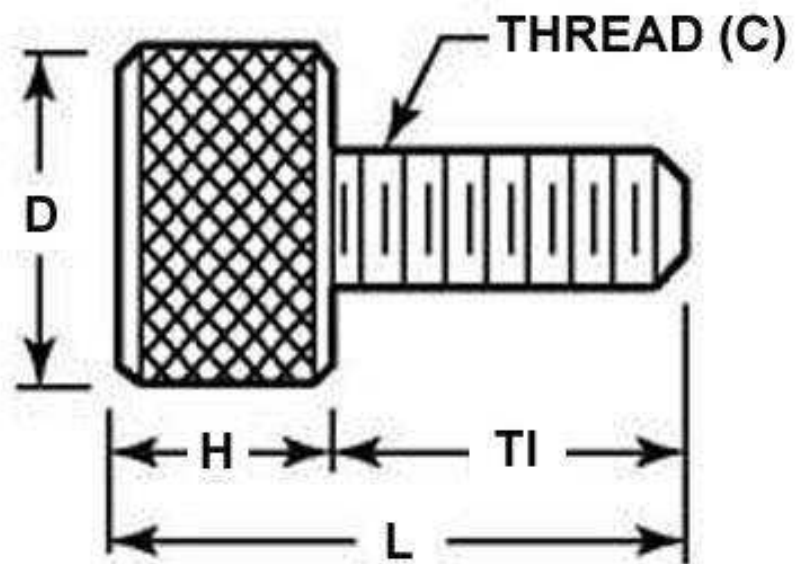

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Thumb - Knurled - Nylon

Part Number	Thread Size (C)	Thread Length (TI) mm <i>inches</i>	Overall Length (L) mm <i>inches</i>	Head Diameter (D) mm <i>inches</i>	Head Height (H) mm <i>inches</i>	Finish	Pitch mm <i>inches</i>
# THS035C-010-K-NY	6-32 UNC (3.5mm)	9.525 <i>0.375</i>	12.700 <i>0.500</i>	9.525 <i>0.375</i>	3.18 <i>0.125</i>	-	0.794 <i>0.031</i>
# THS035C-013-K-NY	6-32 UNC (3.5mm)	12.700 <i>0.500</i>	15.875 <i>0.625</i>	9.525 <i>0.375</i>	3.18 <i>0.125</i>	-	0.794 <i>0.031</i>
# THS042C-010-K-NY	8-32 UNC (4.166mm)	9.525 <i>0.375</i>	14.288 <i>0.563</i>	9.525 <i>0.375</i>	4.76 <i>0.187</i>	-	0.794 <i>0.031</i>
# THS042C-013-K-NY	8-32 UNC (4.166mm)	12.700 <i>0.500</i>	17.463 <i>0.688</i>	9.525 <i>0.375</i>	4.76 <i>0.187</i>	-	0.794 <i>0.031</i>
# THS042C-019-K-NY	8-32 UNC (4.166mm)	19.050 <i>0.750</i>	23.813 <i>0.938</i>	9.525 <i>0.375</i>	4.76 <i>0.187</i>	-	0.794 <i>0.031</i>
# THS048C-013-K-NY	10-24 UNC (4.762mm)	12.700 <i>0.500</i>	17.463 <i>0.688</i>	9.525 <i>0.375</i>	4.76 <i>0.187</i>	-	1.058 <i>0.042</i>
# THS048C-019-K-NY	10-24 UNC (4.762mm)	19.050 <i>0.750</i>	23.813 <i>0.938</i>	12.700 <i>0.500</i>	4.76 <i>0.187</i>	-	1.058 <i>0.042</i>
# THS048C-019-KL-NY	10-24 UNC (4.762mm)	19.050 <i>0.750</i>	23.813 <i>0.938</i>	19.050 <i>0.750</i>	4.76 <i>0.187</i>	-	1.058 <i>0.042</i>
# THS048F-013-K-NY	10-32 UNF (4.762mm)	12.700 <i>0.500</i>	17.463 <i>0.688</i>	9.525 <i>0.375</i>	4.76 <i>0.187</i>	-	0.794 <i>0.031</i>
# THS048F-019-K-NY	10-32 UNF (4.762mm)	19.050 <i>0.750</i>	23.813 <i>0.938</i>	12.700 <i>0.500</i>	4.76 <i>0.187</i>	-	0.794 <i>0.031</i>

Indicates item not stocked at time of printing - Please enquire for lead time

Page 4 of 5

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Screws - Thumb - Knurled - Nylon

Part Number	Thread Size (C)	Thread Length (TI) mm	Overall Length (L) mm	Head Diameter (D) mm	Head Height (H) mm	Finish	Pitch mm
		<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# THS048F-019-KL-NY	10-32 UNF (4.762mm)	19.050 <i>0.750</i>	23.813 <i>0.938</i>	19.050 <i>0.750</i>	4.76 <i>0.187</i>	-	0.794 <i>0.031</i>
# THS048F-025-K-NY	10-32 UNF (4.762mm)	25.400 <i>1.000</i>	30.163 <i>1.188</i>	19.050 <i>0.750</i>	4.76 <i>0.187</i>	-	0.794 <i>0.031</i>
# THS064C-019-K-NY	1/4-20 UNC (6.35mm)	19.050 <i>0.750</i>	23.813 <i>0.938</i>	12.700 <i>0.500</i>	4.76 <i>0.187</i>	-	1.270 <i>0.050</i>
# THS064C-019-KL-NY	1/4-20 UNC (6.35mm)	19.050 <i>0.750</i>	23.813 <i>0.938</i>	19.050 <i>0.750</i>	4.76 <i>0.187</i>	-	1.270 <i>0.050</i>
# THS064C-025-K-NY	1/4-20 UNC (6.35mm)	25.400 <i>1.000</i>	30.163 <i>1.188</i>	19.050 <i>0.750</i>	4.76 <i>0.187</i>	-	1.270 <i>0.050</i>

Indicates item not stocked at time of printing - Please enquire for lead time

Page 5 of 5

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

DISTRIBUTED BY

Distributed By:

