



# Screws - Thumb - Quarter Turn

10/4/2018

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd


MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## INFORMATION

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

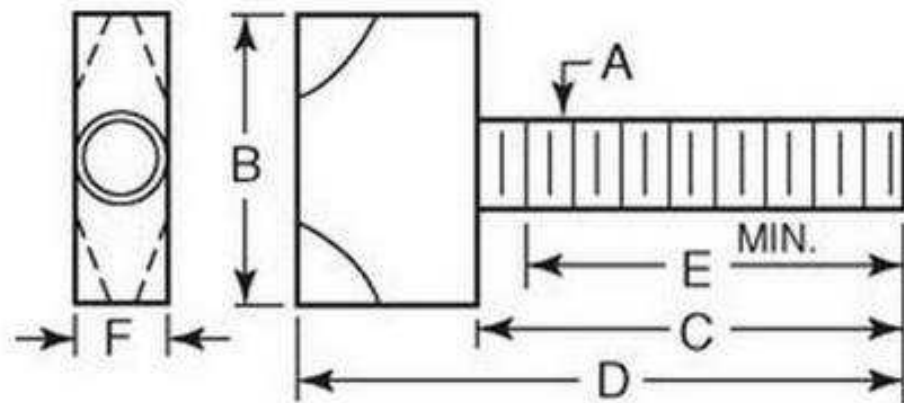

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Thumb - Quarter Turn

Part Number	Thread Size (A)	Thread Length (C) mm <i>inches</i>	Overall Length (D) mm <i>inches</i>	Head Diameter (B/F) mm <i>inches</i>	Material	Finish	Pitch mm <i>inches</i>
# THS048C-025-Q-CS	10-24 UNC (4.762mm)	25.400 <i>1.000</i>	38.100 <i>1.500</i>	12.70 / 4.76	Unhardened Steel	Black Oxide	1.058 <i>0.042</i>
# THS048C-025-Q-CH	10-24 UNC (4.762mm)	25.400 <i>1.000</i>	38.100 <i>1.500</i>	12.70 / 4.76	Hardened Steel	Black Oxide	1.058 <i>0.042</i>
# THS048F-025-Q-3	10-32 UNF (4.762mm)	25.400 <i>1.000</i>	38.100 <i>1.500</i>	19.05 / 4.76	303 Stainless Steel	-	0.794 <i>0.031</i>
# THS048F-025-Q-CH	10-32 UNF (4.762mm)	25.400 <i>1.000</i>	38.100 <i>1.500</i>	12.70 / 4.76	Hardened Steel	Black Oxide	0.794 <i>0.031</i>
# THS048F-025-Q-CS	10-32 UNF (4.762mm)	25.400 <i>1.000</i>	38.100 <i>1.500</i>	12.70 / 4.76	Unhardened Steel	Black Oxide	0.794 <i>0.031</i>
# THS048F-038-Q-3	10-32 UNF (4.762mm)	38.100 <i>1.500</i>	50.800 <i>2.000</i>	19.05 / 4.76	303 Stainless Steel	-	0.794 <i>0.031</i>
# THS048F-038-Q-CH	10-32 UNF (4.762mm)	38.100 <i>1.500</i>	50.800 <i>2.000</i>	12.70 / 4.76	Hardened Steel	Black Oxide	0.794 <i>0.031</i>
# THS048F-038-Q-CS	10-32 UNF (4.762mm)	38.100 <i>1.500</i>	50.800 <i>2.000</i>	12.70 / 4.76	Unhardened Steel	Black Oxide	0.794 <i>0.031</i>
# THS064C-032-Q-3	1/4-20 UNC (6.35mm)	31.750 <i>1.250</i>	47.625 <i>1.875</i>	19.05 / 6.35	303 Stainless Steel	-	1.270 <i>0.050</i>
# THS064C-032-Q-CH	1/4-20 UNC (6.35mm)	31.750 <i>1.250</i>	47.625 <i>1.875</i>	19.05 / 6.35	Hardened Steel	Black Oxide	1.270 <i>0.050</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

Page 4 of 6

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Thumb - Quarter Turn

Part Number	Thread Size (A)	Thread Length (C) mm <i>inches</i>	Overall Length (D) mm <i>inches</i>	Head Diameter (B/F) mm <i>inches</i>	Material	Finish	Pitch mm <i>inches</i>
# THS064C-032-Q-CS	1/4-20 UNC (6.35mm)	31.750 <i>1.250</i>	47.625 <i>1.875</i>	19.05 / 6.35	Unhardened Steel	Black Oxide	1.270 <i>0.050</i>
# THS064C-044-Q-CS	1/4-20 UNC (6.35mm)	44.450 <i>1.750</i>	60.325 <i>2.375</i>	19.05 / 6.35	Unhardened Steel	Black Oxide	1.270 <i>0.050</i>
# THS064C-044-Q-CH	1/4-20 UNC (6.35mm)	44.450 <i>1.750</i>	60.325 <i>2.375</i>	19.05 / 6.35	Hardened Steel	Black Oxide	1.270 <i>0.050</i>
# THS064C-044-Q-3	1/4-20 UNC (6.35mm)	44.450 <i>1.750</i>	60.325 <i>2.375</i>	19.05 / 6.35	303 Stainless Steel	-	1.270 <i>0.050</i>
# THS079C-038-Q-3	5/16-18 UNC (7.938mm)	38.100 <i>1.500</i>	57.150 <i>2.250</i>	25.40 / 7.94	303 Stainless Steel	-	1.411 <i>0.056</i>
# THS079C-038-Q-CH	5/16-18 UNC (7.938mm)	38.100 <i>1.500</i>	57.150 <i>2.250</i>	25.40 / 7.94	Hardened Steel	Black Oxide	1.411 <i>0.056</i>
# THS079C-038-Q-CS	5/16-18 UNC (7.938mm)	38.100 <i>1.500</i>	57.150 <i>2.250</i>	25.40 / 7.94	Unhardened Steel	Black Oxide	1.411 <i>0.056</i>
# THS079C-070-Q-CH	5/16-18 UNC (7.938mm)	69.850 <i>2.750</i>	69.850 <i>2.750</i>	25.40 / 7.94	Hardened Steel	Black Oxide	1.411 <i>0.056</i>
# THS095C-038-Q-3	3/8-16 UNC (9.525mm)	38.100 <i>1.500</i>	63.500 <i>2.500</i>	25.40 / 9.53	303 Stainless Steel	-	1.588 <i>0.063</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

## Screws - Thumb - Quarter Turn

Part Number	Thread Size (A)	Thread Length (C) mm	Overall Length (D) mm	Head Diameter (B/F) mm	Material	Finish	Pitch mm
		<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>
# THS095C-038-Q-CH	3/8-16 UNC (9.525mm)	38.100 <i>1.500</i>	63.500 <i>2.500</i>	25.40 / 9.53	Hardened Steel	Black Oxide	1.588 <i>0.063</i>
# THS095C-038-Q-CS	3/8-16 UNC (9.525mm)	38.100 <i>1.500</i>	63.500 <i>2.500</i>	25.40 / 9.53	Unhardened Steel	Black Oxide	1.588 <i>0.063</i>
# THS095C-051-Q-CH	3/8-16 UNC (9.525mm)	50.800 <i>2.000</i>	76.200 <i>3.000</i>	25.40 / 9.53	Hardened Steel	Black Oxide	1.588 <i>0.063</i>
# THS095C-051-Q-CS	3/8-16 UNC (9.525mm)	50.800 <i>2.000</i>	76.200 <i>3.000</i>	25.40 / 9.53	Unhardened Steel	Black Oxide	1.588 <i>0.063</i>
# THS127C-044-Q-CH	1/2-13 UNC (12.7mm)	44.450 <i>1.750</i>	69.850 <i>2.750</i>	31.75 / 12.70	Hardened Steel	Black Oxide	1.954 <i>0.077</i>
# THS127C-044-Q-CS	1/2-13 UNC (12.7mm)	44.450 <i>1.750</i>	69.850 <i>2.750</i>	31.75 / 12.70	Unhardened Steel	Black Oxide	1.954 <i>0.077</i>
# THS127C-057-Q-CH	1/2-13 UNC (12.7mm)	57.150 <i>2.250</i>	82.550 <i>3.250</i>	31.75 / 12.70	Hardened Steel	Black Oxide	1.954 <i>0.077</i>

# Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

DISTRIBUTED BY

Distributed By:

