



Spacers - Hex - Threaded - Steel

10/4/2018

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Page 1 of 13


INFORMATION

Threaded Hex Spacers. Also known as coupling nuts, joiner or connector.

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

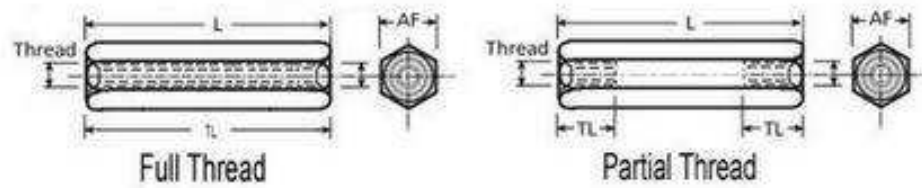

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (A/F) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
# SHX-T-0250-05-005-MZ	M2.5x0.45 (2.5mm Standard)	5	5.00	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
		<i>0.197</i>	<i>0.197</i>			
# SHX-T-0250-08-005-MZ	M2.5x0.45 (2.5mm Standard)	8	5.00	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
		<i>0.315</i>	<i>0.197</i>			
# SHX-T-0250-10-005-MZ	M2.5x0.45 (2.5mm Standard)	10	5.00	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
		<i>0.394</i>	<i>0.197</i>			
# SHX-T-0250-12-005-MZ	M2.5x0.45 (2.5mm Standard)	12	5.00	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
		<i>0.472</i>	<i>0.197</i>			
# SHX-T-0250-15-005-MZ	M2.5x0.45 (2.5mm Standard)	15	5.00	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
		<i>0.591</i>	<i>0.197</i>			
# SHX-T-0250-18-005-MZ	M2.5x0.45 (2.5mm Standard)	18	5.00	8.0	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
		<i>0.709</i>	<i>0.197</i>	<i>0.315</i>		
# SHX-T-0250-20-005-MZ	M2.5x0.45 (2.5mm Standard)	20	5.00	8.0	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
		<i>0.787</i>	<i>0.197</i>	<i>0.315</i>		
# SHX-T-0250-25-005-MZ	M2.5x0.45 (2.5mm Standard)	25	5.00	8.0	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
		<i>0.984</i>	<i>0.197</i>	<i>0.315</i>		

Indicates item not stocked at time of printing - Please enquire for lead time

Page 4 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (AF) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
SHX-T-0250-30-005-MZ	M2.5x0.45 (2.5mm Standard)	30 <i>1.181</i>	5.00 <i>0.197</i>	8.0 <i>0.315</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0250-35-005-MZ	M2.5x0.45 (2.5mm Standard)	35 <i>1.378</i>	5.00 <i>0.197</i>	8.0 <i>0.315</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0250-40-005-MZ	M2.5x0.45 (2.5mm Standard)	40 <i>1.575</i>	5.00 <i>0.197</i>	8.0 <i>0.315</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0250-45-005-MZ	M2.5x0.45 (2.5mm Standard)	45 <i>1.772</i>	5.00 <i>0.197</i>	8.0 <i>0.315</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-05-005-MZ	M3x0.5 (3mm Standard)	5 <i>0.197</i>	5.00 <i>0.197</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-08-005-MZ	M3x0.5 (3mm Standard)	8 <i>0.315</i>	5.00 <i>0.197</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-10-005-MZ	M3x0.5 (3mm Standard)	10 <i>0.394</i>	5.00 <i>0.197</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0300-10-006-S3-PK008	M3x0.5 (3mm Standard)	10.0 <i>0.394</i>	6.0 <i>0.236</i>			
# SHX-T-0300-10-006-S3-PK100	M3x0.5 (3mm Standard)	10.0 <i>0.394</i>	6.0 <i>0.236</i>			

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (AF) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
# SHX-T-0300-12-005-MZ	M3x0.5 (3mm Standard)	12 <i>0.472</i>	5.00 <i>0.197</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-15-005-MZ	M3x0.5 (3mm Standard)	15 <i>0.591</i>	5.00 <i>0.197</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-15-006-S3-PK008	M3x0.5 (3mm Standard)	15.0 <i>0.591</i>	6.0 <i>0.236</i>			
# SHX-T-0300-15-006-S3-PK100	M3x0.5 (3mm Standard)	15.0 <i>0.591</i>	6.0 <i>0.236</i>			
# SHX-T-0300-18-005-MZ	M3x0.5 (3mm Standard)	18 <i>0.709</i>	5.00 <i>0.197</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-20-005-MZ	M3x0.5 (3mm Standard)	20 <i>0.787</i>	5.00 <i>0.197</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-25-005-MZ	M3x0.5 (3mm Standard)	25 <i>0.984</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-25-006-S3-PK008	M3x0.5 (3mm Standard)	25.0 <i>0.984</i>	6.0 <i>0.236</i>			
# SHX-T-0300-25-006-S3-PK100	M3x0.5 (3mm Standard)	25.0 <i>0.984</i>	6.0 <i>0.236</i>			
# SHX-T-0300-30-005-MZ	M3x0.5 (3mm Standard)	30 <i>1.181</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow

Indicates item not stocked at time of printing - Please enquire for lead time

Page 6 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (A/F) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
# SHX-T-0300-35-005-MZ	M3x0.5 (3mm Standard)	35 <i>1.378</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-40-005-MZ	M3x0.5 (3mm Standard)	40 <i>1.575</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-45-005-MZ	M3x0.5 (3mm Standard)	45 <i>1.772</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0300-50-005-MZ	M3x0.5 (3mm Standard)	50 <i>1.969</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-55-005-MZ	M3x0.5 (3mm Standard)	55 <i>2.165</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0300-60-005-MZ	M3x0.5 (3mm Standard)	60 <i>2.362</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-70-005-MZ	M3x0.5 (3mm Standard)	70 <i>2.756</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0300-80-005-MZ	M3x0.5 (3mm Standard)	80 <i>3.150</i>	5.00 <i>0.197</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-05-007-MZ	M4x0.7 (4mm Standard)	5 <i>0.197</i>	7.00 <i>0.276</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-08-007-MZ	M4x0.7 (4mm Standard)	8 <i>0.315</i>	7.00 <i>0.276</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow

Indicates item not stocked at time of printing - Please enquire for lead time

Page 7 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (AF) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
# SHX-T-0400-10-007-MZ	M4x0.7 (4mm Standard)	10 <i>0.394</i>	7.00 <i>0.276</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-12-007-MZ	M4x0.7 (4mm Standard)	12 <i>0.472</i>	7.00 <i>0.276</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-15-007-MZ	M4x0.7 (4mm Standard)	15 <i>0.591</i>	7.00 <i>0.276</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-18-007-MZ	M4x0.7 (4mm Standard)	18 <i>0.709</i>	7.00 <i>0.276</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-20-007-MZ	M4x0.7 (4mm Standard)	20 <i>0.787</i>	7.00 <i>0.276</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-25-007-MZ	M4x0.7 (4mm Standard)	25 <i>0.984</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-30-007-MZ	M4x0.7 (4mm Standard)	30 <i>1.181</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-35-007-MZ	M4x0.7 (4mm Standard)	35 <i>1.378</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-40-007-MZ	M4x0.7 (4mm Standard)	40 <i>1.575</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0400-45-007-MZ	M4x0.7 (4mm Standard)	45 <i>1.772</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow

Indicates item not stocked at time of printing - Please enquire for lead time

Page 8 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm <i>inches</i>	Across Flats (AF) mm <i>inches</i>	Minimum Thread Length (TL) mm <i>inches</i>	Material	Finish
# SHX-T-0400-50-007-MZ	M4x0.7 (4mm Standard)	50 <i>1.969</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0400-55-007-MZ	M4x0.7 (4mm Standard)	55 <i>2.165</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-60-007-MZ	M4x0.7 (4mm Standard)	60 <i>2.362</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0400-70-007-MZ	M4x0.7 (4mm Standard)	70 <i>2.756</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0400-80-007-MZ	M4x0.7 (4mm Standard)	80 <i>3.150</i>	7.00 <i>0.276</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-05-008-MZ	M5x0.8 (5mm Standard)	5 <i>0.197</i>	8.00 <i>0.315</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-08-008-MZ	M5x0.8 (5mm Standard)	8 <i>0.315</i>	8.00 <i>0.315</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-10-008-MZ	M5x0.8 (5mm Standard)	10 <i>0.394</i>	8.00 <i>0.315</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0500-12-008-MZ	M5x0.8 (5mm Standard)	12 <i>0.472</i>	8.00 <i>0.315</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0500-15-008-MZ	M5x0.8 (5mm Standard)	15 <i>0.591</i>	8.00 <i>0.315</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow

Indicates item not stocked at time of printing - Please enquire for lead time

Page 9 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (AF) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
SHX-T-0500-18-008-MZ	M5x0.8 (5mm Standard)	18 <i>0.709</i>	8.00 <i>0.315</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-20-008-MZ	M5x0.8 (5mm Standard)	20 <i>0.787</i>	8.00 <i>0.315</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0500-25-008-MZ	M5x0.8 (5mm Standard)	25 <i>0.984</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0500-30-008-MZ	M5x0.8 (5mm Standard)	30 <i>1.181</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0500-35-008-MZ	M5x0.8 (5mm Standard)	35 <i>1.378</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-40-008-MZ	M5x0.8 (5mm Standard)	40 <i>1.575</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-45-008-MZ	M5x0.8 (5mm Standard)	45 <i>1.772</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-50-008-MZ	M5x0.8 (5mm Standard)	50 <i>1.969</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-55-008-MZ	M5x0.8 (5mm Standard)	55 <i>2.165</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0500-60-008-MZ	M5x0.8 (5mm Standard)	60 <i>2.362</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow

Indicates item not stocked at time of printing - Please enquire for lead time

Page 10 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (AF) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
# SHX-T-0500-70-008-MZ	M5x0.8 (5mm Standard)	70 <i>2.756</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0500-80-008-MZ	M5x0.8 (5mm Standard)	80 <i>3.150</i>	8.00 <i>0.315</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-05-010-MZ	M6x1 (6mm Standard)	5 <i>0.197</i>	10.00 <i>0.394</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-08-010-MZ	M6x1 (6mm Standard)	8 <i>0.315</i>	10.00 <i>0.394</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0600-10-010-MZ	M6x1 (6mm Standard)	10 <i>0.394</i>	10.00 <i>0.394</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-12-010-MZ	M6x1 (6mm Standard)	12 <i>0.472</i>	10.00 <i>0.394</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0600-15-010-MZ	M6x1 (6mm Standard)	15 <i>0.591</i>	10.00 <i>0.394</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0600-18-010-MP	M6x1 (6mm Standard)	18 <i>0.709</i>	10.00 <i>0.394</i>	Full Thread	Steel B2P	None
# SHX-T-0600-18-010-MZ	M6x1 (6mm Standard)	18 <i>0.709</i>	10.00 <i>0.394</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-20-010-MZ	M6x1 (6mm Standard)	20 <i>0.787</i>	10.00 <i>0.394</i>	Full Thread	Mild Steel (S 300 Pb)	Electro-Zinc Yellow

Indicates item not stocked at time of printing - Please enquire for lead time

Page 11 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (AF) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
# SHX-T-0600-25-010-MZ	M6x1 (6mm Standard)	25 <i>0.984</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-30-010-MZ	M6x1 (6mm Standard)	30 <i>1.181</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-35-010-MZ	M6x1 (6mm Standard)	35 <i>1.378</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0600-40-010-MZ	M6x1 (6mm Standard)	40 <i>1.575</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-45-010-MZ	M6x1 (6mm Standard)	45 <i>1.772</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0600-50-010-MZ	M6x1 (6mm Standard)	50 <i>1.969</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-55-010-MZ	M6x1 (6mm Standard)	55 <i>2.165</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-60-010-MZ	M6x1 (6mm Standard)	60 <i>2.362</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
# SHX-T-0600-70-010-MZ	M6x1 (6mm Standard)	70 <i>2.756</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow
SHX-T-0600-80-010-MZ	M6x1 (6mm Standard)	80 <i>3.150</i>	10.00 <i>0.394</i>	10.0 <i>0.394</i>	Mild Steel (S 300 Pb)	Electro-Zinc Yellow

Indicates item not stocked at time of printing - Please enquire for lead time

Page 12 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Spacers - Hex - Threaded - Steel

Part Number	Thread Size	Length (L) mm	Across Flats (AF) mm	Minimum Thread Length (TL) mm	Material	Finish
		<i>inches</i>	<i>inches</i>	<i>inches</i>		
SHX-T-0800-24-013-MP	M8x1.25 (8mm Standard)	24 <i>0.945</i>	13.00 <i>0.512</i>	Full Thread	Steel B2P	None
SHX-T-1000-30-017-MP	M10x1.5 (10mm Standard)	30 <i>1.181</i>	17.00 <i>0.669</i>	Full Thread	Steel B2P	None
SHX-T-1200-36-019-MP	M12x1.75 (12mm Standard)	36 <i>1.417</i>	19.00 <i>0.748</i>	Full Thread	Steel B2P	None
# SHX-T-1600-48-024-MP	M16x2 (16mm Standard)	48 <i>1.890</i>	24.00 <i>0.945</i>	Full Thread	Steel B2P	None
# SHX-T-2000-64-030-MP	M20x2.5 (20mm Standard)	64 <i>2.520</i>	30.00 <i>1.181</i>	Full Thread	Steel B2P	None

Indicates item not stocked at time of printing - Please enquire for lead time

Page 13 of 13

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd
MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

DISTRIBUTED BY

Distributed By:

