



Springs - Torsion - Right Hand Wound

10/4/2018

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

INFORMATION


Free Deflection denotes the angle of the legs in the unloaded starting position

Load should be applied at about half the leg length

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

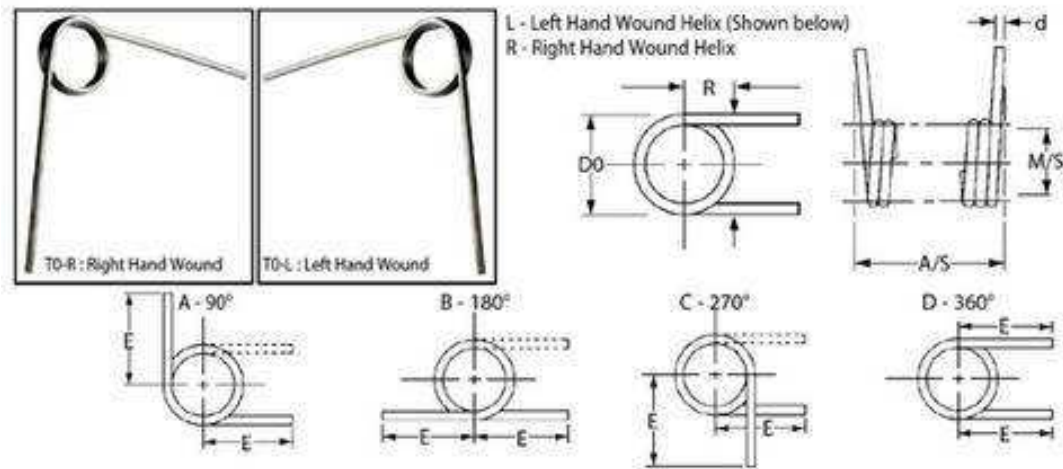

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Springs - Torsion - Right Hand Wound

Part Number	Mandrel Size (MS) mm	Length of Leg (E) mm	Wire Diameter mm	Spring Outside Diameter (D0) mm	Minimum Axial Space mm	Torque When Parallel N.mm	Material	Free Deflection Deg.
	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>			
# TS-014R-095-030-090-S2	1.40 <i>0.055</i>	9.5 <i>0.374</i>	0.30 <i>0.012</i>	2.36 <i>0.093</i>	1.17 <i>0.046</i>	5.3	302 Stainless Steel	90
# TS-016R-095-030-270-S2	1.57 <i>0.062</i>	9.5 <i>0.374</i>	0.30 <i>0.012</i>	2.59 <i>0.102</i>	3.53 <i>0.139</i>	5.3	302 Stainless Steel	270
# TS-017R-095-030-180-S2	1.70 <i>0.067</i>	9.5 <i>0.374</i>	0.30 <i>0.012</i>	2.77 <i>0.109</i>	2.18 <i>0.086</i>	5.3	302 Stainless Steel	180
# TS-024R-127-043-090-S2	2.36 <i>0.093</i>	12.7 <i>0.500</i>	0.43 <i>0.017</i>	4.06 <i>0.160</i>	2.06 <i>0.081</i>	13.2	302 Stainless Steel	90
# TS-024R-127-043-180-S2	2.36 <i>0.093</i>	12.7 <i>0.500</i>	0.43 <i>0.017</i>	4.37 <i>0.172</i>	3.23 <i>0.127</i>	13.2	302 Stainless Steel	180
# TS-024R-127-043-270-S2	2.36 <i>0.093</i>	12.7 <i>0.500</i>	0.43 <i>0.017</i>	4.06 <i>0.160</i>	4.88 <i>0.192</i>	13.2	302 Stainless Steel	270
# TS-024R-191-051-270-S2	2.36 <i>0.093</i>	19.1 <i>0.752</i>	0.51 <i>0.020</i>	4.45 <i>0.175</i>	6.22 <i>0.245</i>	21.1	302 Stainless Steel	270
# TS-028R-127-030-180-S2	2.77 <i>0.109</i>	12.7 <i>0.500</i>	0.30 <i>0.012</i>	4.22 <i>0.166</i>	1.50 <i>0.059</i>	5.3	302 Stainless Steel	180
# TS-028R-127-030-270-S2	2.77 <i>0.109</i>	12.7 <i>0.500</i>	0.30 <i>0.012</i>	4.32 <i>0.170</i>	2.18 <i>0.086</i>	5.3	302 Stainless Steel	270
# TS-028R-127-043-360-S2	2.77 <i>0.109</i>	12.7 <i>0.500</i>	0.43 <i>0.017</i>	4.42 <i>0.174</i>	2.81 <i>0.111</i>	13.2	302 Stainless Steel	360

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Springs - Torsion - Right Hand Wound

Part Number	Mandrel Size (MS) mm	Length of Leg (E) mm	Wire Diameter mm	Spring Outside Diameter (D0) mm	Minimum Axial Space mm	Torque When Parallel N.mm	Material	Free Deflection Deg.
	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>			
# TS-028R-191-051-090-S2	2.77 <i>0.109</i>	19.1 <i>0.752</i>	0.51 <i>0.020</i>	4.85 <i>0.191</i>	2.41 <i>0.095</i>	21.1	302 Stainless Steel	90
# TS-028R-191-051-180-S2	2.77 <i>0.109</i>	19.1 <i>0.752</i>	0.51 <i>0.020</i>	4.55 <i>0.179</i>	4.32 <i>0.170</i>	21.1	302 Stainless Steel	180
TS-036R-254-071-180-S2	3.56 <i>0.140</i>	25.4 <i>1.000</i>	0.71 <i>0.028</i>	6.325 <i>0.249</i>	6.045 <i>0.238</i>	0.09	Stainless Steel	180
# TS-036R-191-043-360-S2	3.56 <i>0.140</i>	19.1 <i>0.752</i>	0.43 <i>0.017</i>	5.97 <i>0.235</i>	4.32 <i>0.170</i>	13.2	302 Stainless Steel	360
# TS-036R-191-064-270-S2	3.56 <i>0.140</i>	19.1 <i>0.752</i>	0.64 <i>0.025</i>	5.56 <i>0.219</i>	8.03 <i>0.316</i>	42.4	302 Stainless Steel	270
# TS-036R-191-064-090-S2	3.56 <i>0.140</i>	19.1 <i>0.752</i>	0.64 <i>0.025</i>	5.97 <i>0.235</i>	2.44 <i>0.096</i>	42.4	302 Stainless Steel	90
# TS-036R-191-064-180-S2	3.56 <i>0.140</i>	19.1 <i>0.752</i>	0.64 <i>0.025</i>	5.69 <i>0.224</i>	5.23 <i>0.206</i>	42.4	302 Stainless Steel	180
# TS-036R-254-051-180-S2	3.56 <i>0.140</i>	25.4 <i>1.000</i>	0.51 <i>0.020</i>	6.15 <i>0.242</i>	3.30 <i>0.130</i>	21.1	302 Stainless Steel	180
# TS-040R-191-043-180-S2	3.96 <i>0.156</i>	19.1 <i>0.752</i>	0.43 <i>0.017</i>	6.32 <i>0.249</i>	2.39 <i>0.094</i>	13.2	302 Stainless Steel	180
# TS-040R-191-043-270-S2	3.96 <i>0.156</i>	19.1 <i>0.752</i>	0.43 <i>0.017</i>	6.58 <i>0.259</i>	3.13 <i>0.123</i>	13.2	302 Stainless Steel	270

Indicates item not stocked at time of printing - Please enquire for lead time

Page 5 of 9

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Springs - Torsion - Right Hand Wound

Part Number	Mandrel Size (MS) mm	Length of Leg (E) mm	Wire Diameter mm	Spring Outside Diameter (D0) mm	Minimum Axial Space mm	Torque When Parallel N.mm	Material	Free Deflection Deg.
	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>			
# TS-040R-254-051-360-S2	3.96 <i>0.156</i>	25.4 <i>1.000</i>	0.51 <i>0.020</i>	6.45 <i>0.254</i>	6.35 <i>0.250</i>	21.1	302 Stainless Steel	360
# TS-040R-254-081-180-S2	3.96 <i>0.156</i>	25.4 <i>1.000</i>	0.81 <i>0.032</i>	6.86 <i>0.270</i>	6.91 <i>0.272</i>	92.7	302 Stainless Steel	180
# TS-040R-254-081-270-S2	3.96 <i>0.156</i>	25.4 <i>1.000</i>	0.81 <i>0.032</i>	6.71 <i>0.264</i>	9.70 <i>0.382</i>	92.7	302 Stainless Steel	270
# TS-043R-254-081-090-S2	4.34 <i>0.171</i>	25.4 <i>1.000</i>	0.81 <i>0.032</i>	7.32 <i>0.288</i>	3.86 <i>0.152</i>	92.7	302 Stainless Steel	90
# TS-044R-254-076-090-S2	4.37 <i>0.172</i>	25.4 <i>1.000</i>	0.76 <i>0.030</i>	7.137 <i>0.281</i>	2.946 <i>0.116</i>	0.11	Stainless Steel	90
# TS-044R-254-051-270-S2	4.37 <i>0.172</i>	25.4 <i>1.000</i>	0.51 <i>0.020</i>	6.81 <i>0.268</i>	4.19 <i>0.165</i>	21.1	302 Stainless Steel	270
# TS-048R-254-053-360-S2	4.75 <i>0.187</i>	25.4 <i>1.000</i>	0.53 <i>0.021</i>	6.883 <i>0.271</i>	6.147 <i>0.242</i>	0.04	Stainless Steel	360
# TS-048R-318-089-090-S2	4.75 <i>0.187</i>	31.8 <i>1.252</i>	0.89 <i>0.035</i>	8.00 <i>0.315</i>	3.43 <i>0.135</i>	113	302 Stainless Steel	90
# TS-048R-318-089-180-S2	4.75 <i>0.187</i>	31.8 <i>1.252</i>	0.89 <i>0.035</i>	7.70 <i>0.303</i>	7.37 <i>0.290</i>	113	302 Stainless Steel	180
# TS-048R-318-089-270-S2	4.75 <i>0.187</i>	31.8 <i>1.252</i>	0.89 <i>0.035</i>	7.90 <i>0.311</i>	11.23 <i>0.442</i>	113	302 Stainless Steel	270

Indicates item not stocked at time of printing - Please enquire for lead time

Page 6 of 9

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Springs - Torsion - Right Hand Wound

Part Number	Mandrel Size (MS) mm	Length of Leg (E) mm	Wire Diameter mm	Spring Outside Diameter (D0) mm	Minimum Axial Space mm	Torque When Parallel N.mm	Material	Free Deflection Deg.
	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>			
# TS-048R-318-102-090-S2	4.75 <i>0.187</i>	31.8 <i>1.252</i>	1.02 <i>0.040</i>	7.849 <i>0.309</i>	5.029 <i>0.198</i>	0.24	Stainless Steel	90
# TS-052R-318-114-090-S2	5.16 <i>0.203</i>	31.8 <i>1.252</i>	1.14 <i>0.045</i>	9.068 <i>0.357</i>	6.579 <i>0.259</i>	0.35	Stainless Steel	90
# TS-052R-254-064-180-S2	5.16 <i>0.203</i>	25.4 <i>1.000</i>	0.64 <i>0.025</i>	7.72 <i>0.304</i>	3.84 <i>0.151</i>	42.4	302 Stainless Steel	180
# TS-055R-318-122-090-S2	5.54 <i>0.218</i>	31.8 <i>1.252</i>	1.22 <i>0.048</i>	9.525 <i>0.375</i>	6.045 <i>0.238</i>	0.44	Stainless Steel	90
# TS-055R-254-064-270-S2	5.54 <i>0.218</i>	25.4 <i>1.000</i>	0.64 <i>0.025</i>	8.64 <i>0.340</i>	5.23 <i>0.206</i>	42.4	302 Stainless Steel	270
# TS-055R-254-064-360-S2	5.54 <i>0.218</i>	25.4 <i>1.000</i>	0.64 <i>0.025</i>	8.23 <i>0.324</i>	7.32 <i>0.288</i>	42.4	302 Stainless Steel	360
# TS-055R-254-081-180-S2	5.54 <i>0.218</i>	25.4 <i>1.000</i>	0.81 <i>0.032</i>	9.30 <i>0.366</i>	5.28 <i>0.208</i>	92.7	302 Stainless Steel	180
# TS-055R-254-081-270-S2	5.54 <i>0.218</i>	25.4 <i>1.000</i>	0.81 <i>0.032</i>	8.99 <i>0.354</i>	7.52 <i>0.296</i>	92.7	302 Stainless Steel	270
# TS-059R-508-130-090-S2	5.94 <i>0.234</i>	50.8 <i>2.000</i>	1.30 <i>0.051</i>	10.363 <i>0.408</i>	7.442 <i>0.293</i>	0.51	Stainless Steel	90
# TS-060R-254-081-360-S2	5.95 <i>0.234</i>	25.4 <i>1.000</i>	0.81 <i>0.032</i>	9.70 <i>0.382</i>	8.94 <i>0.352</i>	92.7	302 Stainless Steel	360

Indicates item not stocked at time of printing - Please enquire for lead time

Page 7 of 9

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Springs - Torsion - Right Hand Wound

Part Number	Mandrel Size (MS) mm	Length of Leg (E) mm	Wire Diameter mm	Spring Outside Diameter (D0) mm	Minimum Axial Space mm	Torque When Parallel N.mm	Material	Free Deflection Deg.
	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>			
TS-064R-318-122-180-S2	6.35 <i>0.250</i>	31.8 <i>1.252</i>	1.22 <i>0.048</i>	10.262 <i>0.404</i>	11.430 <i>0.450</i>	0.44	Stainless Steel	180
# TS-071R-318-089-180-S2	7.14 <i>0.281</i>	31.8 <i>1.252</i>	0.89 <i>0.035</i>	11.43 <i>0.450</i>	5.38 <i>0.212</i>	113	302 Stainless Steel	180
# TS-071R-318-089-270-S2	7.14 <i>0.281</i>	31.8 <i>1.252</i>	0.89 <i>0.035</i>	11.05 <i>0.435</i>	8.33 <i>0.328</i>	113	302 Stainless Steel	270
# TS-075R-508-137-090-S2	7.52 <i>0.296</i>	50.8 <i>2.000</i>	1.37 <i>0.054</i>	12.294 <i>0.484</i>	7.874 <i>0.310</i>	0.57	Stainless Steel	90
TS-075R-508-150-090-S2	7.52 <i>0.296</i>	50.8 <i>2.000</i>	1.50 <i>0.059</i>	12.675 <i>0.499</i>	8.636 <i>0.340</i>	0.74	Stainless Steel	90
# TS-079R-318-089-360-S2	7.92 <i>0.312</i>	31.8 <i>1.252</i>	0.89 <i>0.035</i>	11.96 <i>0.471</i>	10.29 <i>0.405</i>	113	302 Stainless Steel	360
TS-083R-508-150-180-S2	8.33 <i>0.328</i>	50.8 <i>2.000</i>	1.50 <i>0.059</i>	13.360 <i>0.526</i>	14.224 <i>0.560</i>	0.74	Stainless Steel	180
TS-087R-508-160-090-S2	8.71 <i>0.343</i>	50.8 <i>2.000</i>	1.60 <i>0.063</i>	14.224 <i>0.560</i>	9.195 <i>0.362</i>	0.9	Stainless Steel	90
# TS-091R-508-114-270-S2	9.12 <i>0.359</i>	50.8 <i>2.000</i>	1.14 <i>0.045</i>	14.122 <i>0.556</i>	10.541 <i>0.415</i>	0.35	Stainless Steel	270
TS-103R-508-198-090-S2	10.31 <i>0.406</i>	50.8 <i>2.000</i>	1.98 <i>0.078</i>	17.450 <i>0.687</i>	11.430 <i>0.450</i>	1.71	Stainless Steel	90

Indicates item not stocked at time of printing - Please enquire for lead time

Page 8 of 9

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Springs - Torsion - Right Hand Wound

Part Number	Mandrel Size (MS) mm	Length of Leg (E) mm	Wire Diameter mm	Spring Outside Diameter (D0) mm	Minimum Axial Space mm	Torque When Parallel N.mm	Material	Free Deflection Deg.
	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>	<i>inches</i>			
# TS-127R-508-160-180-S2	12.70 <i>0.500</i>	50.8 <i>2.000</i>	1.60 <i>0.063</i>	19.482 <i>0.767</i>	12.065 <i>0.475</i>	0.9	Stainless Steel	180
TS-127R-508-198-180-S2	12.70 <i>0.500</i>	50.8 <i>2.000</i>	1.98 <i>0.078</i>	20.396 <i>0.803</i>	16.764 <i>0.660</i>	1.71	Stainless Steel	180
# TS-135R-508-178-270-S2	13.49 <i>0.531</i>	50.8 <i>2.000</i>	1.78 <i>0.070</i>	20.980 <i>0.826</i>	18.212 <i>0.717</i>	1.23	Stainless Steel	270

Indicates item not stocked at time of printing - Please enquire for lead time

Page 9 of 9

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

DISTRIBUTED BY

Distributed By:

