




MBA

Couplings - Bellows - Set Screw and Keyway - Brass

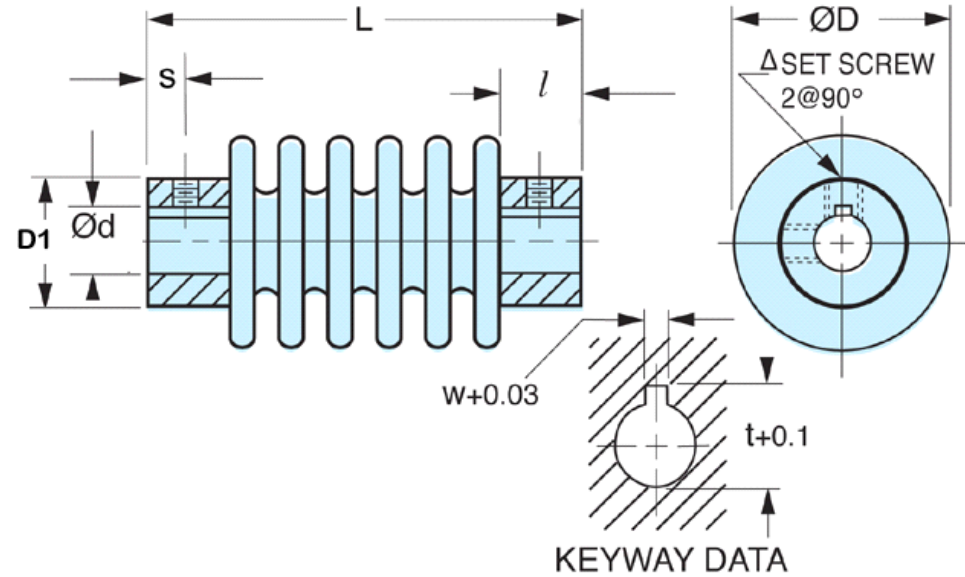

Polished Brass Bellows

Polished Brass Hubs

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4051-0635-0635-BS	39.7	6.350 / 6.350 with 3.175mm Keyway	50.8	3.53		30.2	14.30	3.96	1	0.25
	1.563		2.000			1.189	0.563	0.156		0.010
# CPB4064-0635-0635-BS	39.7	6.350 / 6.350 with 3.175mm Keyway	63.5	2.82		30.2	14.30	3.96	1.5	0.38
	1.563		2.500			1.189	0.563	0.156		0.015
# CPB4076-0635-0635-BS	39.7	6.350 / 6.350 with 3.175mm Keyway	76.2	2.12		30.2	14.30	3.96	2	0.51
	1.563		3.000			1.189	0.563	0.156		0.020

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4051-0800-0800-BS	39.7	8.000 / 8.000 with 2mm Keyway	50.8	3.50		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>
# CPB4064-0800-0800-BS	39.7	8.000 / 8.000 with 2mm Keyway	63.5	2.80		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-0800-0800-BS	39.7	8.000 / 8.000 with 2mm Keyway	76.2	2.10		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>3.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4051-0953-0953-BS	39.7	9.525 / 9.525 with 3.175mm Keyway	50.8	3.53		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>
# CPB4064-0953-0953-BS	39.7	9.525 / 9.525 with 3.175mm Keyway	63.5	2.82		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-0953-0953-BS	39.7	9.525 / 9.525 with 3.175mm Keyway	76.2	2.12		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>3.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4051-1000-1000-BSK	39.7	10.000 / 10.000 with 3mm Keyway	51.0	3.50		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.008</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4064-1000-1000-BSK	39.7	10.000 / 10.000 with 3mm Keyway	63.5	2.80		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-1000-1000-BSK	39.7	10.000 / 10.000 with 3mm Keyway	76.0	2.10		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>2.992</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4051-1200-1200-BSK	39.7	12.000 / 12.000 with 4mm Keyway	51.0	3.50		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.008</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>
# CPB4064-1200-1200-BSK	39.7	12.000 / 12.000 with 4mm Keyway	63.5	2.80		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-1200-1200-BSK	39.7	12.000 / 12.000 with 4mm Keyway	76.0	2.10		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>2.992</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4051-1270-1270-BS	39.7	12.700 / 12.700 with 3.175mm Keyway	50.8	3.53		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4064-1270-1270-BS	39.7	12.700 / 12.700 with 3.175mm Keyway	63.5	2.82		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-1270-1270-BS	39.7	12.700 / 12.700 with 3.175mm Keyway	76.2	2.12		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>3.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4051-1400-1400-BS	39.7	14.000 / 14.000 with 5mm Keyway	50.8	3.50		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>
# CPB4064-1400-1400-BS	39.7	14.000 / 14.000 with 5mm Keyway	63.5	2.80		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-1400-1400-BS	39.7	14.000 / 14.000 with 5mm Keyway	76.2	2.10		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>3.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4051-1500-1500-BSK	39.7	15.000 / 15.000 with 5mm Keyway	51.0	3.50		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.008</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4064-1500-1500-BSK	39.7	15.000 / 15.000 with 5mm Keyway	63.5	2.80		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-1500-1500-BSK	39.7	15.000 / 15.000 with 5mm Keyway	76.0	2.10		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>2.992</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4051-1588-1588-BS	39.7	15.875 / 15.875 with 4.762mm Keyway	50.8	3.53		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>
# CPB4064-1588-1588-BS	39.7	15.875 / 15.875 with 4.762mm Keyway	63.5	2.82		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-1588-1588-BS	39.7	15.875 / 15.875 with 4.762mm Keyway	76.2	2.12		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>3.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4051-1600-1600-BS	39.7	16.000 / 16.000 with 5mm Keyway	50.8	3.50		30.2	14.30	3.96	1	0.25
	<i>1.563</i>		<i>2.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.010</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4064-1600-1600-BS	39.7	16.000 / 16.000 with 5mm Keyway	63.5	2.80		30.2	14.30	3.96	1.5	0.38
	<i>1.563</i>		<i>2.500</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.015</i>
# CPB4076-1600-1600-BS	39.7	16.000 / 16.000 with 5mm Keyway	76.2	2.10		30.2	14.30	3.96	2	0.51
	<i>1.563</i>		<i>3.000</i>			<i>1.189</i>	<i>0.563</i>	<i>0.156</i>		<i>0.020</i>
# CPB4664-1000-1000-BS	46.0	10.000 / 10.000 with 3mm Keyway	63.5	2.80		34.9	15.90	3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.015</i>
# CPB4676-1000-1000-BS	46.0	10.000 / 10.000 with 3mm Keyway	76.2	2.10		34.9	15.90	3.96	2	0.51
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.020</i>
# CPB4664-1200-1200-BS	46.0	12.000 / 12.000 with 4mm Keyway	63.5	2.80		34.9	15.90	3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.015</i>
# CPB4676-1200-1200-BS	46.0	12.000 / 12.000 with 4mm Keyway	76.2	2.10		34.9	15.90	3.96	2	0.51
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.020</i>
# CPB4664-1270-1270-BS	46.0	12.700 / 12.700 with 3.175mm Keyway	63.5	3.53		34.9	15.90	3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.015</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4676-1270-1270-BS	46.0	12.700 / 12.700 with 3.175mm Keyway	76.2	2.82		34.9	15.90	3.96 3.96	2	0.51
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>			<i>0.020</i>
# CPB4664-1400-1400-BS	46.0	14.000 / 14.000 with 5mm Keyway	63.5	2.80		34.9	15.90	3.96 3.96 3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>			<i>0.015</i>
# CPB4676-1400-1400-BS	46.0	14.000 / 14.000 with 5mm Keyway	76.2	2.10		34.9	15.90	3.96	2	0.51
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.020</i>
# CPB4664-1500-1500-BS	46.0	15.000 / 15.000 with 5mm Keyway	63.5	2.80		34.9	15.90	3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.015</i>
# CPB4676-1500-1500-BS	46.0	15.000 / 15.000 with 5mm Keyway	76.2	2.10		34.9	15.90	3.96	2	0.51
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.020</i>
# CPB4664-1588-1588-BS	46.0	15.875 / 15.875 with 4.762mm Keyway	63.5	3.53		34.9	15.90	3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.015</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4676-1588-1588-BS	46.0	15.875 / 15.875 with 4.762mm Keyway	76.2	2.82		34.9	15.90	3.96	2	0.51
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.020</i>
# CPB4664-1600-1600-BS	46.0	16.000 / 16.000 with 5mm Keyway	63.5	2.80		34.9	15.90	3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.015</i>
# CPB4676-1600-1600-BS	46.0	16.000 / 16.000 with 5mm Keyway	76.2	2.10		34.9	15.90	3.96	2	0.51
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.020</i>
# CPB4664-1905-1905-BS	46.0	19.050 / 19.050 with 4.762mm Keyway	63.5	3.53		34.9	15.90	3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.015</i>
# CPB4676-1905-1905-BS	46.0	19.050 / 19.050 with 4.762mm Keyway	76.2	2.82		34.9	15.90	3.96	2	0.51
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.020</i>
# CPB4664-2000-2000-BS	46.0	20.000 / 20.000 with 6mm Keyway	63.5	2.80		34.9	15.90	3.96	1.5	0.38
	<i>1.811</i>		<i>2.500</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.015</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB4676-2000-2000-BS	46.0	20.000 / 20.000 with 6mm Keyway	76.2	2.10		34.9	15.90	3.96	3	0.64
	<i>1.811</i>		<i>3.000</i>			<i>1.374</i>	<i>0.626</i>	<i>0.156</i>		<i>0.025</i>
# CPB6092-1500-1500-BSK	60.3	15.000 / 15.000 with 5mm Keyway	92.0	4.20		47.6	15.90	4.80	3	0.64
	<i>2.374</i>		<i>3.622</i>			<i>1.874</i>	<i>0.626</i>	<i>0.189</i>		<i>0.025</i>
# CPB6092-1588-1588-BS	60.3	15.875 / 15.875 with 4.762mm Keyway	92.1	4.23		47.6	15.90	4.80	3	0.64
	<i>2.374</i>		<i>3.626</i>			<i>1.874</i>	<i>0.626</i>	<i>0.189</i>		<i>0.025</i>
# CPB6092-1600-1600-BSK	60.3	16.000 / 16.000 with 5mm Keyway	92.0	4.20		47.6	15.90	4.80	3	0.64
	<i>2.374</i>		<i>3.622</i>			<i>1.874</i>	<i>0.626</i>	<i>0.189</i>		<i>0.025</i>
# CPB6092-1905-1905-BS	60.3	19.050 / 19.050 with 4.762mm Keyway	92.1	4.23		47.6	15.90	4.80	3	0.64
	<i>2.374</i>		<i>3.626</i>			<i>1.874</i>	<i>0.626</i>	<i>0.189</i>		<i>0.025</i>
# CPB6092-2000-2000-BSK	60.3	20.000 / 20.000 with 6mm Keyway	92.0	4.20		47.6	15.90	4.80	3	0.64
	<i>2.374</i>		<i>3.622</i>			<i>1.874</i>	<i>0.626</i>	<i>0.189</i>		<i>0.025</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.

Couplings - Bellows - Set Screw and Keyway - Brass

Part Number	OD (D) mm	Bores (d1 / d2) mm	Overall Length (L) mm	Max. Torque N.m	Max. Speed RPM	Hub Diameter (D1) mm	Typical Hub Length (l) mm	Typical Screw Centres (s) mm	Angular Offset Deg.	Lateral Offset mm
	<i>inches</i>	<i>inches</i>	<i>inches</i>			<i>inches</i>	<i>inches</i>	<i>inches</i>		<i>inches</i>
# CPB6092-2500-2500-BS	60.3	25.000 / 25.000 with 8mm Keyway	92.1	4.20		47.6	15.90	4.80	3	0.64
	<i>2.374</i>		<i>3.626</i>			<i>1.874</i>	<i>0.626</i>	<i>0.189</i>		<i>0.025</i>
# CPB6092-2540-2540-BS	60.3	25.400 / 25.400 with 6.350mm Keyway	92.1	4.23		30.2	15.90	4.80	3	0.64
	<i>2.374</i>		<i>3.626</i>			<i>1.189</i>	<i>0.626</i>	<i>0.189</i>		<i>0.025</i>

Indicates item not stocked at time of printing - Please enquire for lead time

E&OE Pricing and all details subject to change without notice - Copyright Miniature Bearings Australia Pty Ltd

MBA Size Listings are a guide to sizes only and must not be solely relied on for critical design information.



DISTRIBUTED BY

Ask us to put your name and address here

<http://www.minibearings.com.au/product>

Ph +61 7 3245 7977

Fax +61 7 3245 1017

Catalogue requests to catalogues@minibearings.com.au

